

# Appendix C

## FINAL EIS – ERRATA DOCUMENTS


Since the Final EIS was published in June 2008, errors have been identified and corrected. This appendix contains the corrected pages of text, tables, and exhibits from the Final EIS.

- *Executive Summary* – corrections to Exhibit ES-9, *2020 Alternative B1b Noise Exposure Contour*
- Chapter Five, *Affected Environment* – corrections to the text on Page 5c-6
- Chapter Eight, *FAA's Preferred Alternative* – corrections to Exhibit 8-4, *FAA's Preferred Alternative Noise Exposure Contour*
- Chapter Eight, *FAA's Preferred Alternative* – corrections to Exhibit 8-5, *FAA's Preferred Alternative – west of FLL*
- Chapter Eight, *FAA's Preferred Alternative* – corrections to Exhibit 8-6, *FAA's Preferred Alternative – south of FLL*
- Chapter Eight, *FAA's Preferred Alternative* – corrections to Table 8-11, *Summary of the Estimated Cost for Land Use Mitigation Inside and Outside the 65 DNL Noise Contour*
- Appendix E *Airfield Planning, Design, & Constructability Review* – corrections to Table E.1.8, *Tenant Facility Relocation Summary (acres)*
- Chapter Six, *Environmental Consequences* – corrections to Table 6.B-12 *Maximum Criteria Pollutant Design Concentrations* and Table 6.B-13 *Impact of Criteria Pollutant Concentrations*
- Appendix E *Airfield Planning, Design, & Constructability Review* – corrections to Exhibit E.1-15, *Potential Tenant Relocation Siting Area – Alternative C1*
- Appendix F *Net Benefits Analysis* corrections to Section F.6.4 *Alternative B4 Sensitivity Analysis*

**THIS PAGE INTENTIONALLY LEFT BLANK**

	65-70 DNL	70-75 DNL	75+ DNL	65+
<b>Unmitigated Housing Units in the 65+ DNL of the 2020 B1b Contour</b>				
<b>Dania Beach</b>				
Single Family	550	21	0	571
Multi Family	360	30	0	390
Mobile Home	90	0	0	90
<b>TOTAL HOUSING UNITS</b>	<b>1000</b>	<b>51</b>	<b>0</b>	<b>1051</b>
<b>Total Population</b>	<b>2,344</b>	<b>127</b>	<b>0</b>	<b>2,471</b>

	Outside 65 DNL	Outside 65 DNL	Outside 65 DNL
<b>Unmitigated Housing Units Outside the 65+ DNL of the 2020 B1b Contour</b>			
Single Family	212	215	0
Multi Family	3	215	0
Mobile Home	0	58	222
<b>TOTAL HOUSING UNITS</b>	<b>215</b>	<b>588</b>	<b>222</b>
<b>Total Population</b>	<b>490</b>	<b>1,394</b>	<b>300</b>

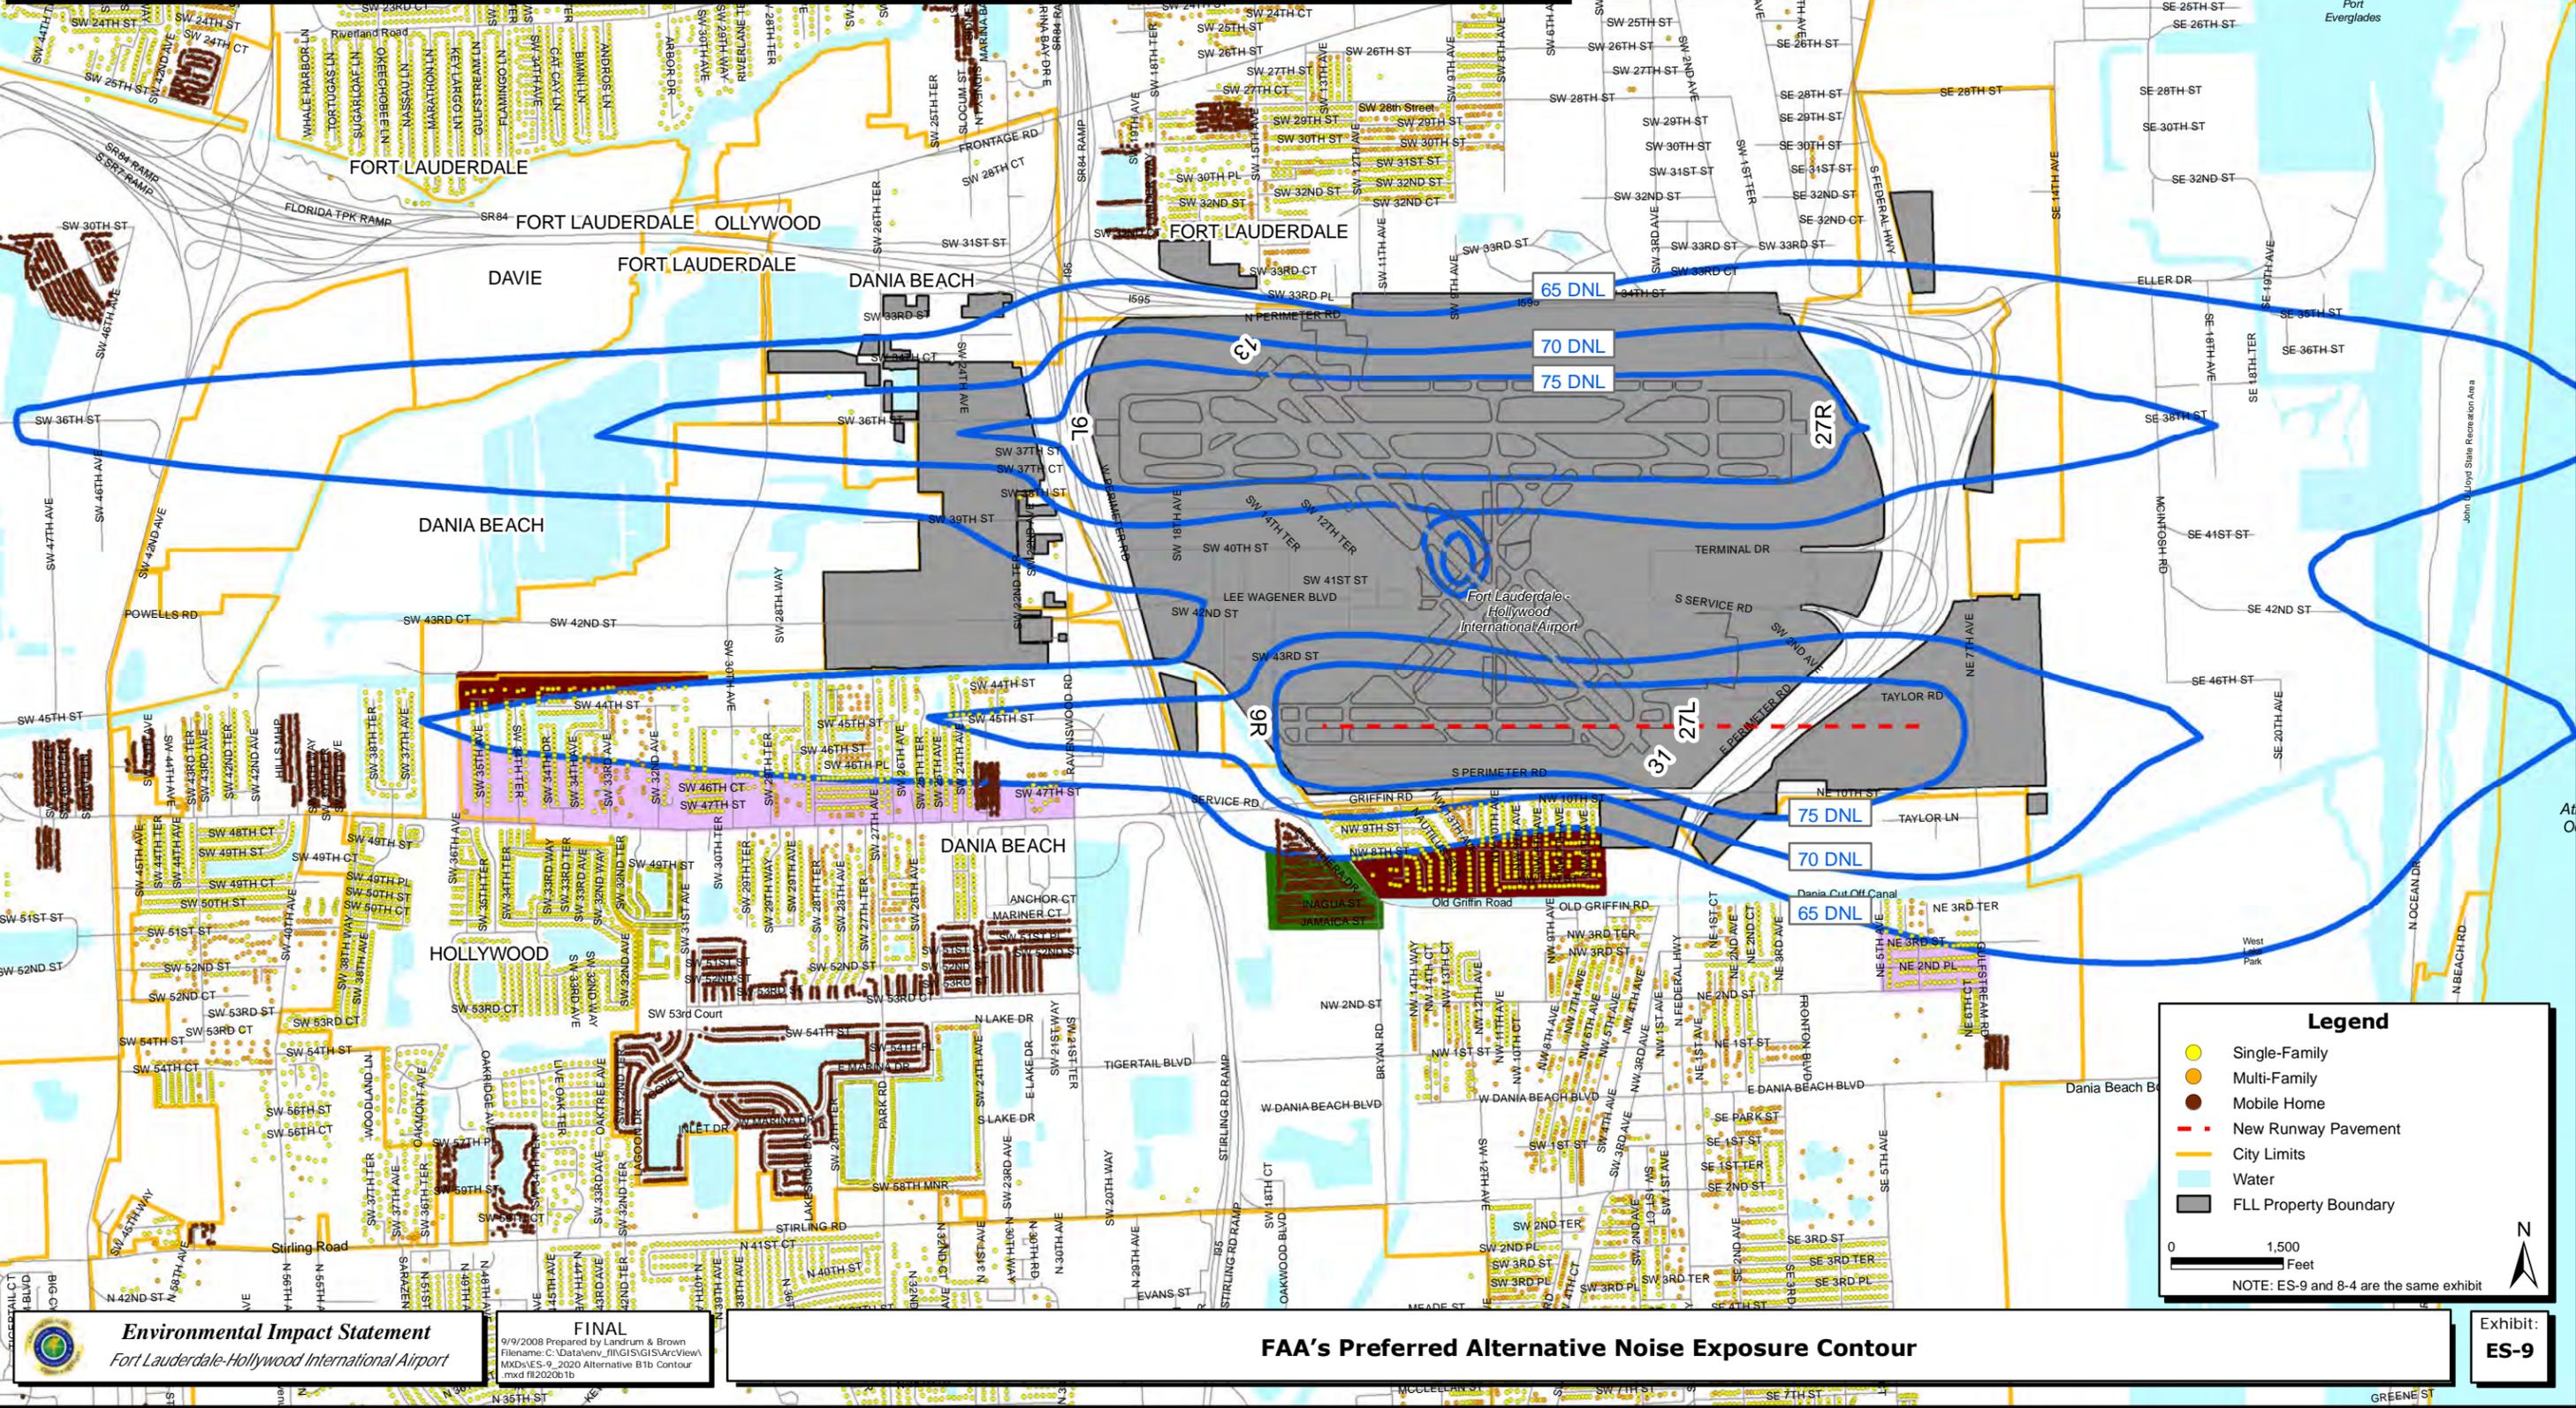



# **ADDENDUM – CHAPTER FIVE AFFECTED ENVIRONMENT**

## **SECTION 5.C.1 – NOISE**

**Page 5.C-6**

**THIS PAGE INTENTIONALLY LEFT BLANK**

**Table 5.C.1-1  
TYPICAL PERCENTAGE OF PERSONS HIGHLY DISTURBED BY AIRCRAFT  
NOISE BY TYPE OF ACTIVITY**

ACTIVITY TYPE	PERCENT ANNOYED
TV/Radio Reception	20.6
Conversation	14.5
Telephone	13.8
Relaxing Outside	12.5
Relaxing Inside	10.7
Listening to Records/Tapes	9.1
Sleep	7.7
Reading	3.3
Eating	3.5
Other	1.3

Source: Information on *Levels of Environmental Noise Requisite to Protect Public Health and Welfare with an Adequate Margin of Safety*, United States Environmental Protection Agency: Office of Noise Abatement and Control, March 1974.

The USEPA's Levels Document identified noise levels for protection from hearing loss. The outdoor DNL of 55 dB is identified as that level which, if not exceeded, will protect the public health and welfare with an adequate margin of safety. This is based on the following factors: (1) The identified protective level indoors (to preclude speech interference) is DNL 45 dB; (2) Assuming an attenuation outdoors-to-indoors of 15 dB (which is an average amount of sound attenuation that assumes partly-open windows), the corresponding outdoor level is DNL 60 dB; and (3) A "margin of safety" of 5 dB is applied to the outdoor identified level to account for other adverse effects on activity interference and annoyance as well as for the most sensitive fraction of the population. (USEPA 1974)

Social surveys show that interference with sleep is noted as a contributor to annoyance for nearly eight percent of the population surveyed. Physiological studies show that sleep interference can exist without a person being consciously awakened. Numerous studies on sleep interference have been conducted, with varying conclusions as to the effect of noise on sleep.

One study concludes that, with adjustments for comparable measures of noise, it can be expected that approximately 30 percent of the population could be aroused or awakened if [redacted] levels reached 80 to 95 dB, depending on window configuration (open or closed) and quality of the residential construction.<sup>3</sup>


The degree to which noise interferes with indoor speech depends not only on physical factors such as noise levels, distance between the speaker and listener, and room acoustics, but also on non-physical factors such as the speaker's enunciation and the listener's interest in, and familiarity with the topic. The effects of noise interference on normally voiced speech indoors are graphically depicted on Exhibit 5.C.1-2, Impacts on Speech Communication. The highest steady noise that allows normal conversation throughout an average room with 100 percent

<sup>3</sup> *Noise and Sleep*, Journal of the Acoustical Society of America, Lukas, Volume 58, Number 6, December 1975.


**THIS PAGE INTENTIONALLY LEFT BLANK**

	65-70 DNL	70-75 DNL	75+ DNL	65+
<b>Unmitigated Housing Units in the 65+ DNL of the 2020 B1b Contour</b>				
<b>Dania Beach</b>				
Single Family	550	21	0	571
Multi Family	360	30	0	390
Mobile Home	90	0	0	90
<b>TOTAL HOUSING UNITS</b>	<b>1000</b>	<b>51</b>	<b>0</b>	<b>1051</b>
<b>Population</b>				
<b>Total Population</b>	<b>2,344</b>	<b>127</b>	<b>0</b>	<b>2,471</b>

Outside 65 DNL	Outside 65 DNL	Outside 65 DNL
<b>Unmitigated Housing Units Outside the 65+ DNL of the 2020 B1b Contour</b>		
212	315	0
3	115	0
0	56	222
<b>215</b>	<b>586</b>	<b>222</b>
<b>Population</b>		
<b>490</b>	<b>1394</b>	<b>300</b>

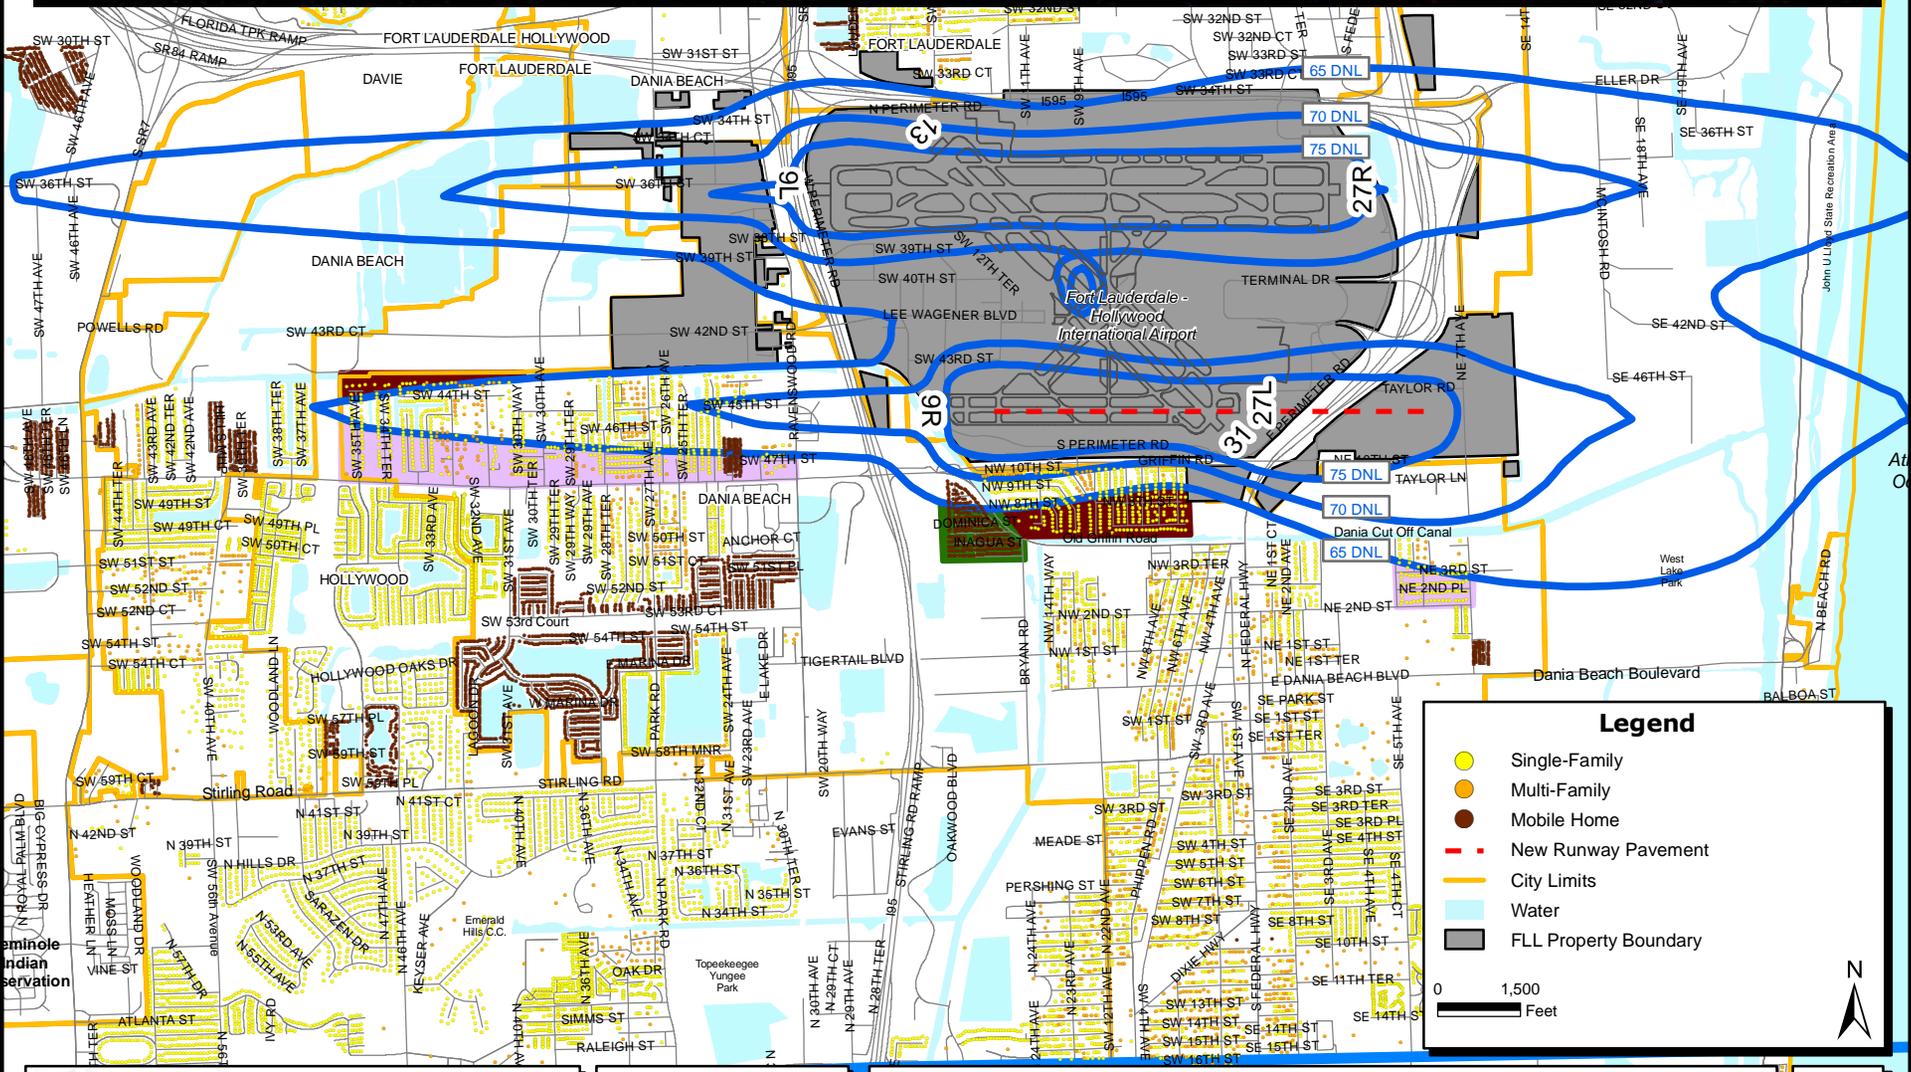

	65-70 DNL	70-75 DNL	75+ DNL	65+ DNL	Outside 65 DNL	Outside 65 DNL
Unmitigated Housing Units in the 65+ DNL of the 2020 B1b Contour						
<b>Dania Beach (West of Airport)</b>						
Single Family	391	10	0	401	23	246
Multi Family	260	0	0	260	3	215
Mobile Home	42	0	0	42	0	36
<b>TOTAL HOUSING UNITS</b>	<b>693</b>	<b>10</b>	<b>0</b>	<b>703</b>	<b>26</b>	<b>317</b>
Population						
Total Population	1,713	25	0	1,738	57	323

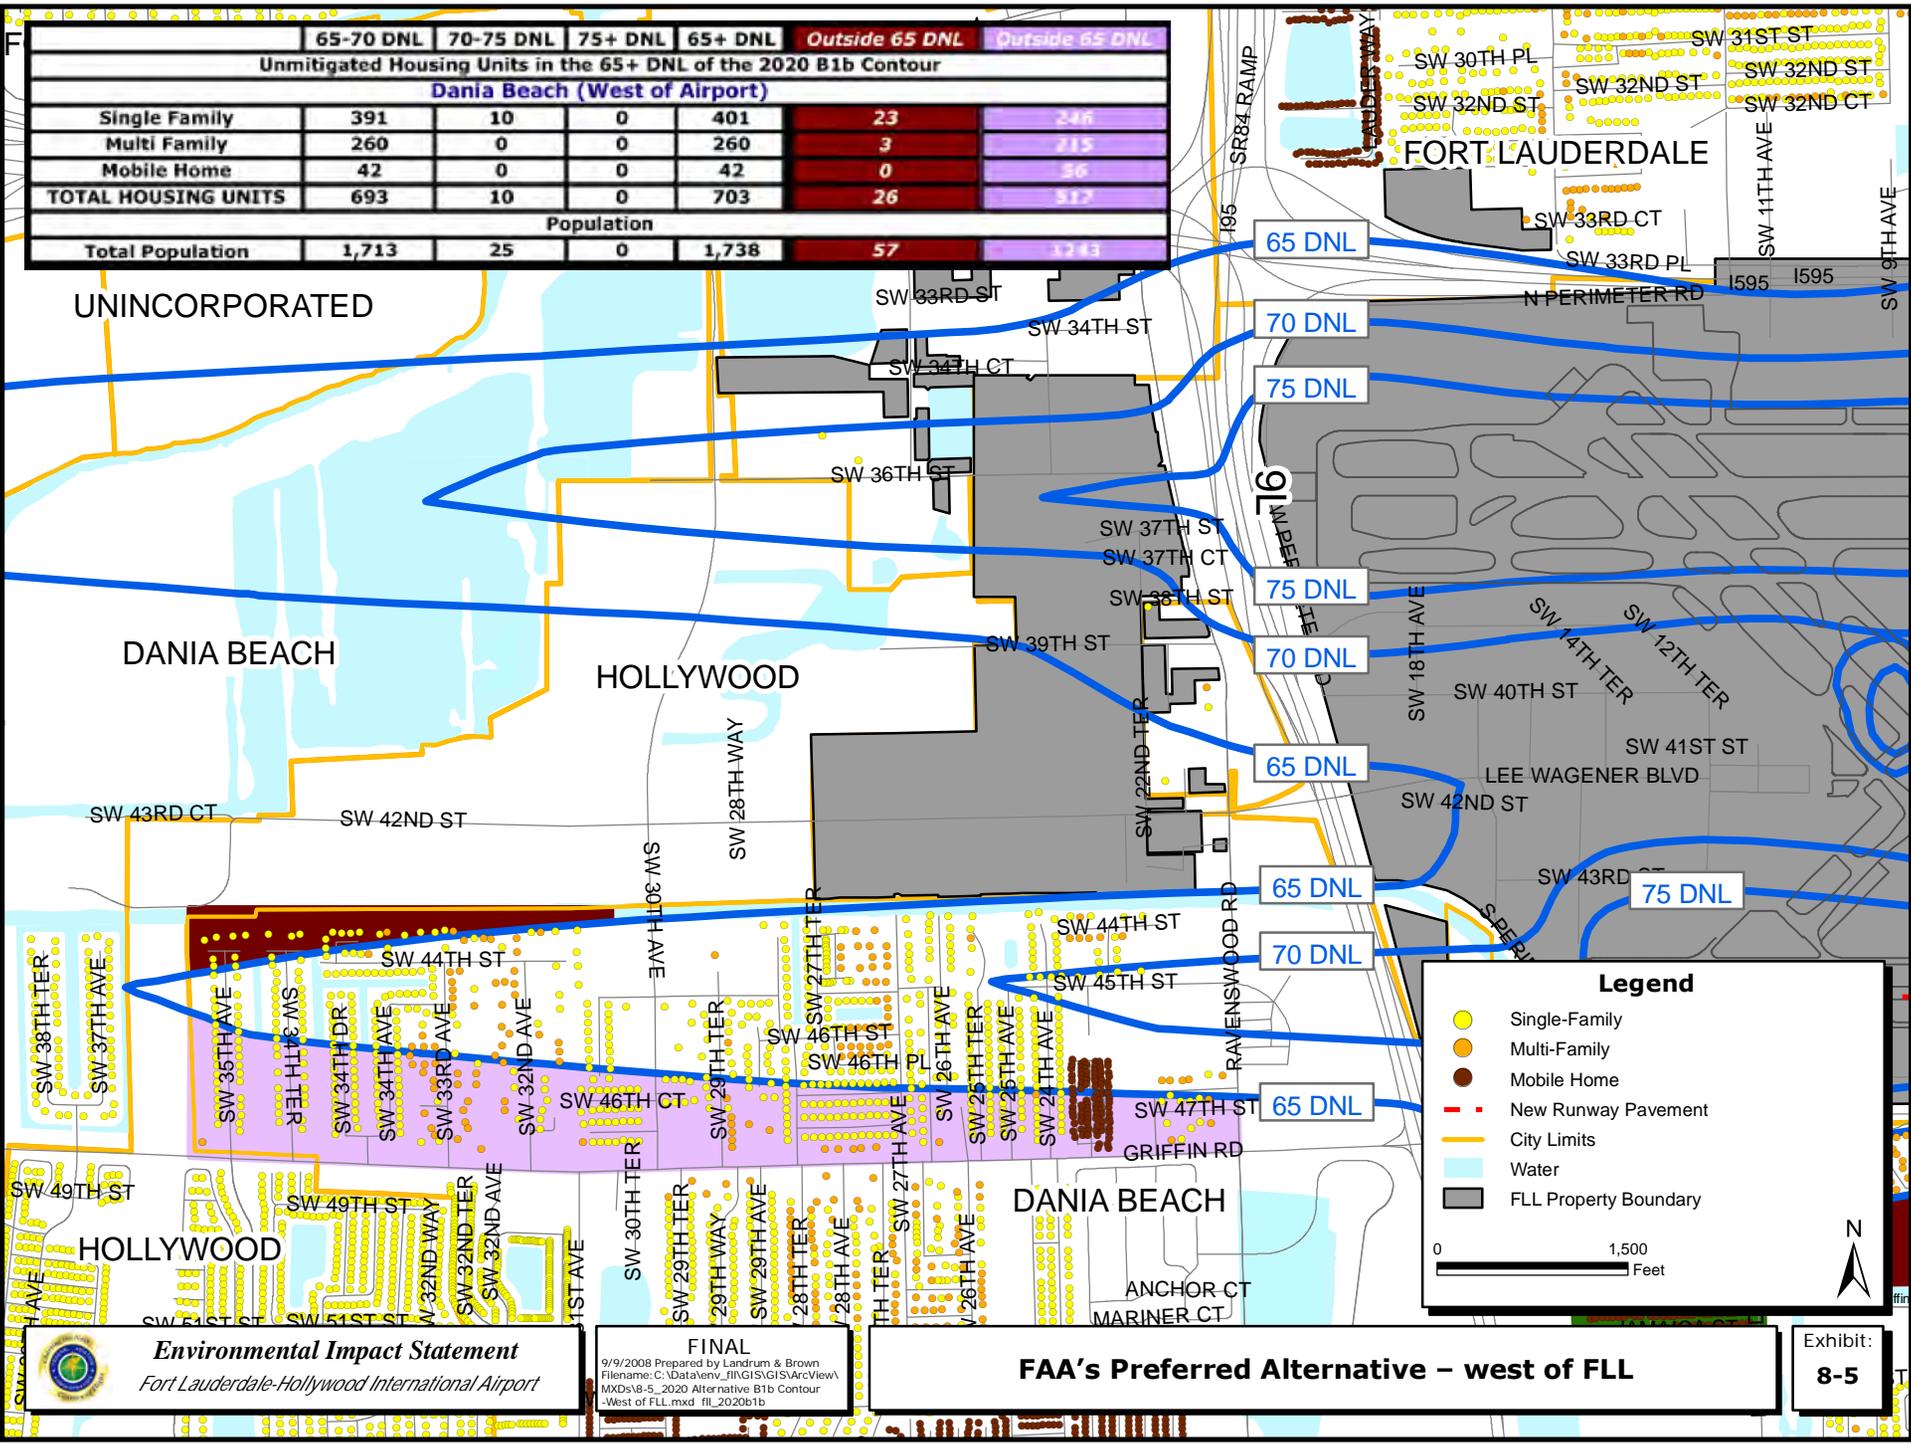

**Legend**

- Single-Family
- Multi-Family
- Mobile Home
- - - New Runway Pavement
- City Limits
- Water
- FLL Property Boundary

0 1,500 Feet

N





# **ADDENDUM – CHAPTER EIGHT**

## **TABLE 8-11**

The estimated total cost of a voluntary acquisition program for eligible mobile home units and the individually owned parcels in the Ocean Waterway mobile home community is \$41,763,750.

**8.6.2.8 Total Estimated Cost of Land Use Mitigation Programs**

**Table 8-11, Summary of the Estimated Cost for Land Use Mitigation Inside and Outside the 65 DNL Noise Contour**, provides a summary of all of the calculated cost estimates for the implementation of the recommended land use mitigation measures within the 65 DNL of the FAA’s Preferred Alternative. This information is provided for planning, scheduling, and funding purposes.

The summary of the mitigation cost estimates include:

- Sound insulation – only
- Purchase Assurance/Sales Assistance – with Sound Insulation
- Voluntary Acquisition of Mobile Home Units and Property in the Ocean Waterway mobile home community (the underlying land use and zoning for the acquired property would be changed to a compatible use)
- Acquisition of Mobile Home Units and the Marshalls Everglade mobile home community (the underlying land use and zoning for the acquired property would be changed to a compatible use)

**Table 8-11  
SUMMARY OF THE ESTIMATED COST FOR LAND USE MITIGATION  
INSIDE AND OUTSIDE THE 65 DNL NOISE CONTOUR  
Fort Lauderdale-Hollywood International Airport  
SOUND INSULATION – ONLY**

Incompatible Land Use		Estimated Cost Per Unit Sound Insulation	Number of Units	ESTIMATED TOTAL
Inside 65 DNL	Single-Family	\$65,000	571	\$37,115,000
	Multi-Family	\$35,000	390	\$13,650,000
	25 percent program and administrative cost**			\$12,691,250
<b>Subtotal – Mitigation Inside 65 DNL</b>				<b>\$63,456,250</b>
<hr/>				
Outside 65 DNL	Single-Family	\$65,000	527	\$34,255,000
	Multi-Family	\$35,000	218	\$7,630,000
	25 percent program and administrative cost**			\$10,471,250
<b>Subtotal – Mitigation Outside 65 DNL</b>				<b>\$52,356,250</b>
<hr/>				
<b>GRAND TOTAL – SOUND INSULATION PROGRAM</b>				<b>\$115,812,500</b>

Table 8-11, Continued

**SUMMARY OF THE ESTIMATED COST FOR LAND USE MITIGATION  
 INSIDE AND OUTSIDE THE 65 DNL NOISE CONTOUR  
 Fort Lauderdale-Hollywood International Airport**

**ESTIMATED COST FOR PURCHASE ASSURANCE WITH SOUND INSULATION**

This analysis assumes that the properties can be resold by Broward County for an estimated 50 percent of the original purchase price. This estimate is based on a per-unit cost of \$325,000 for single-family and \$140,000 for multi-family.

ESTIMATED		Estimated Cost Per Unit Purchase Assurance	Estimated Cost Per Unit Sound Insulation	Number of Units	ESTIMATED TOTAL
Inside 65 DNL	Single-Family	\$325,000	\$65,000	571	\$129,902,500
	Multi-Family*	\$140,000	\$35,000	390	\$40,950,000
	25 percent program and administrative cost**				\$42,713,125
<b>Subtotal – Mitigation Inside 65 DNL</b>					<b>\$213,565,625</b>
Outside 65 DNL	Single-Family	\$325,000	\$65,000	527	\$119,892,500
	Multi-Family*	\$140,000	\$35,000	218	\$22,890,000
	25 percent program and administrative cost**				\$35,695,625
<b>Subtotal – Mitigation Outside 65 DNL</b>					<b>\$178,478,125</b>
<b>GRAND TOTAL – PURCHASE ASSURANCE</b>					<b>\$392,043,750</b>

**ESTIMATED COST FOR SALES ASSISTANCE WITH SOUND INSULATION**

This analysis assumes that the seller would receive at least 85 percent of the sale price for a property and Broward County would contribute the remaining 15 percent to assure the seller 100 percent of the asking price. This estimate is based on a per-unit cost of \$325,000 for single-family and \$140,000 for multi-family.

Incompatible Land Use		Estimated Cost Per Unit Sales Assistance	Estimated Cost Per Unit Sound Insulation	Number of Units	ESTIMATED TOTAL
Inside 65 DNL	Single-Family	\$325,000	\$65,000	571	\$64,951,250
	Multi-Family*	\$140,000	\$35,000	390	\$21,840,000
	25 percent program and administrative cost**				\$21,697,813
<b>Subtotal – Mitigation Inside 65 DNL</b>					<b>\$108,489,063</b>
Outside 65 DNL	Single-Family	\$325,000	\$65,000	527	\$59,946,250
	Multi-Family*	\$140,000	\$35,000	218	\$12,208,000
	25 percent program and administrative cost**				\$18,038,563
<b>Subtotal – Mitigation Outside 65 DNL</b>					<b>\$90,192,813</b>
<b>GRAND TOTAL – SALES ASSISTANCE</b>					<b>\$198,681,875</b>

**Table 8-11, Continued**

**SUMMARY OF THE ESTIMATED COST FOR LAND USE MITIGATION  
INSIDE AND OUTSIDE THE 65 DNL NOISE CONTOUR  
Fort Lauderdale-Hollywood International Airport**

**VOLUNTARY ACQUISITION – MOBILE HOME UNITS AND PROPERTY**

Incompatible Land Use		Estimated Cost Per Unit	Number of Units	ESTIMATED TOTAL
Inside 65 DNL	Mobile Home Unit on Leased Parcel <i>Marshalls Everglade</i>	\$100,000	42	\$4,200,000
	Mobile Home Unit and Land on Occupant-Owned Parcel <i>Ocean Waterway Co-Op</i>	\$150,500	48	\$7,224,000
	25 percent program and administrative cost**			\$2,856,000
<b>Subtotal – Mitigation Inside 65 DNL</b>				<b>\$14,280,000</b>
Outside 65 DNL	Mobile Home Unit on Leased Parcel <i>Marshalls Everglade</i>	\$100,000	56	\$5,600,000
	Mobile Home Unit and Land on Occupant-Owned Parcel <i>Ocean Waterway Co-Op</i>	\$150,500	222	\$33,411,000
	25 percent program and administrative cost**			\$9,752,750
<b>Subtotal – Mitigation <i>Outside</i> 65 DNL</b>				<b>\$48,763,750</b>
<b>Subtotal – Purchase the Marshalls Everglade Mobile Home Park Property***</b>				<b>\$1,316,020</b>
<b>GRAND TOTAL – MOBILE HOME UNITS AND PROPERTY</b>				<b>\$64,359,770</b>

Note: The potential mitigation areas outside of the 65 DNL noise contour only include contiguous residential neighborhoods/subdivisions.

The estimated cost per unit provides an order of magnitude cost estimate for program level comparisons. The actual program costs will be dependent on how Broward County defines the Purchase Assurance Program and the Sales Assistance Program pursuant to the mitigation recommendations in their current 14 CFR Part 150 Study Update. The costs presented in this EIS represent a 'worst case' scenario for planning purposes.

Purchase Assurance/Sales Assistance costs are based on information provided by Broward County Aviation Department (*Noise Mitigation Assistance Program*, prepared by The Urban Group, in association with Earth Tech and The Jones Payne Group. Version 2, 02/27/07). This information is provided for information and planning purposes only. It is not to be construed as an assessment of fair market value for the areas identified for potential mitigation in this EIS.

Participation in the Purchase Assurance/Sales Assistance Program recommended for this EIS would be voluntary on the part of all homeowners and property owners, therefore, no relocation assistance costs have been included in these estimates.

Sound Insulation Program costs are based on information provided by Broward County. The FAA assumes these costs were developed for Broward County based on the existing housing stock and other comparable FLL sound insulation programs. (Source: (Jacobs Consultancy PowerPoint Presentation made to the Broward County Board of County Commissioners at a Public Hearing on the 14 CFR Part 150 Noise Compatibility Study Update, March 14, 2007).

**Table 8-11, Continued**

**SUMMARY OF THE ESTIMATED COST FOR LAND USE MITIGATION  
INSIDE AND OUTSIDE THE 65 DNL NOISE CONTOUR  
Fort Lauderdale-Hollywood International Airport**

**VOLUNTARY ACQUISITION – MOBILE HOME UNITS AND PROPERTY**

- \* The order of magnitude cost estimate calculated for multi-family units is based on the cost data provided in the Broward County Aviation Department, *Noise Mitigation Assistance Program*. The total purchase price of all rental apartment developments (in the County's study areas) produced a weighted average of \$140,000 per unit for rental apartments.
- \*\* The estimated cost per unit and the 25 percent program and administrative costs are based on information provided by Broward County (Source: Jacobs Consultancy PowerPoint Presentation made to the Broward County Board of County Commissioners at a Public Hearing on the 14 CFR Part 150 Noise Compatibility Study Update, March 14, 2007).
- \*\*\* Based on information from the Broward County Property Appraiser's Office (February 2008), the Marshalls Everglade Subdivision land is appraised at \$1,316,020 for approximately 5.5 acres. Without a proper appraisal, the approximate value of this land on the open market is not known at this time. Therefore, the Property Appraiser's value is what is being used to estimate the possible mitigation program costs.

Source: Landrum & Brown, 2008 [REVISED: October 2008]

**8.6.2.9 Federal Funding of Mitigation**

As summarized in Section 8.6.2.1, *Broward County Proposed Noise Mitigation Principles*, the FAA reviewed Broward County's mitigation principles and determined that four of the proposed principles were appropriate for recommendation in the EIS to address the noise impacts to incompatible land use:

- Each of the mitigation measures will address a neighborhood/subdivision area as a whole to ensure, to the extent practicable, that community cohesion will be maintained
- Acquisition of mobile home units and the relocation of residents
- Sound insulation of eligible single-family and multi-family units
- Purchase guarantee/sales assistance (with sound insulation) for eligible single-family and multi-family units

Because the noise impacts to incompatible land uses inside the 65+ DNL are attributable to the implementation of the FAA's Preferred Alternative, the FAA would participate in the funding of this mitigation.

**8.6.2.10 Implementation of FAA-Approved Mitigation Programs**

To determine the priority for distributing funds, the FAA follows the planning guidance in FAA Order 5100.39A, *Airports Capital Improvement Plan (ACIP)*, to systematically identify, prioritize, and assign funds to critical airport development and associated capital needs for the National Airspace System (NAS). The ACIP also serves as the basis for distributing grant funds under the Airport Improvement Program (AIP).

**THIS PAGE INTENTIONALLY LEFT BLANK**

**Table E.1-8**

Tenant Facility Relocation Summary (acres)<sup>1/</sup>

	Alternative						
	A	B1	B1b / B1c	B4	B5	D1	D2
<b>Total Tenant Displacements:</b>							
Airside:							
Airfield Access Required by Aircraft <sup>2/</sup>	-	8.3	8.3	19.0	5.0	143.8 <sup>3/</sup>	152.1 <sup>3/</sup>
AOA Access Required by Vehicles Only <sup>3/</sup>	-	2.1	2.1	2.1	2.1	11.8	11.8
<b>Total Airside Facility Impacts</b>	-	10.3	10.3	21.0	7.1	155.6	163.9
Non-Airside Facility Impacts	-	8.3	8.3	6.5	8.3	105.9	105.9
<b>Total:</b>	-	18.6	18.6	27.6	15.4	261.5	269.8
<b>Existing Airport Property Potentially Available for Redevelopment:</b>							
Airside:							
Airfield Accessible by Aircraft	83.9	47.7	47.7	84.9	47.7	152.0	119.6
Aircraft Accessibility for Vehicles Only	-	-	-	-	-	30.4	30.4
<b>Total Airside Property Available</b>	83.9	47.7	47.7	84.9	47.7	182.4 <sup>4/</sup>	150.1 <sup>4/</sup>
Non-Airside Property Available	151.0	105.5	105.5	141.7	66.6	151.0 <sup>5/</sup>	105.5 <sup>5/</sup>
<b>Total:</b>	234.9	153.2	153.2	226.6	114.2	333.4	255.6
<b>Surplus/Deficiency:</b>							
Airside:							
Airfield Accessible by Aircraft	83.9	39.4	39.4	65.9	42.6	8.2	(32.4)
Aircraft Accessibility for Vehicles Only	-	(2.1)	(2.1)	(2.1)	(2.1)	18.6	18.6
<b>Airside</b>	83.9	37.4	37.4	63.9	40.6	26.8	(32.4)
Non-Airside	151.0	97.3	97.3	135.1	58.3	45.1	(0.3)
<b>Total:</b>	234.9	134.6	134.6	199.0	98.9	71.9	(32.8)

<sup>1/</sup> The values contained herein provide consideration for both "Direct" and "Indirect" tenant facility impacts. "Direct" impacts are those tenant leasehold areas that would be directly impacted by the proposed airfield development, while "Indirect" impacts include tenant facilities that could be relocated or reconfigured to accommodate those tenants directly impacted by the proposed airfield development. To ensure consistency and an accurate estimate of the surplus/deficiency values, the acreages associated with property available for redevelopment for Alternatives C1, D1 and D2 have been increased to provide consideration for those tenants that could be relocated/reconfigured (Indirect impacts). These areas primarily include those tenant facilities that are located on the west side of the Airport, immediately north of Lee Wagner Boulevard.

<sup>2/</sup> Airside facilities that require airside access by aircraft include those identified as General Aviation (GA), Fixed Base Operator (FBO), and/or all-cargo.

<sup>3/</sup> Airside facilities that require airside access by vehicles only include those identified as Aircraft Rescue-Fire Fighting (ARFF) and belly cargo.

<sup>4/</sup> The net property available for facility relocation within the west (airside) area has been reduced by 10 acres to account for wet detention required for water quality purposes.

<sup>5/</sup> The net property available for facility relocation within the remote west (non-airside) area has been reduced by 5 acres to account for wet detention required for water quality purposes.



# ADDENDUM – EXECUTIVE SUMMARY

## SECTION ES.6.2 – AIRPORT NOISE

### Page 5.C-6

#### ES.6.2 AIRPORT NOISE

For the project year 2012, the population and number of residential housing units located within the 65+ DNL contour would increase for all alternatives as compared to the No Action Alternative. No noise-sensitive public facilities would be affected by noise levels at or above 65 DNL. The areas of the 2012 noise contours for the build alternatives ranges from 4.7 to 5.6 square miles, as compared to the No Action Alternative, which is 5.0 square miles. Alternative C1 would cause a decrease in the size of the noise exposure area compared to the 2012 No Action Alternative. (See Section 6.C, *Airport Noise*.)

By 2020, the area of noise exposure would not change with implementation of Alternatives B1, B1b, B1c, and D1; would decrease with implementation of Alternatives B4, C1, and D2; and would increase with implementation of Alternative B5 in comparison to the 2020 No Action Alternative. One noise-sensitive public facility would be impacted by noise levels at or above 65 DNL in 2020.

The supplemental Federal Interagency Committee on Noise (FICON) screening analysis conducted for each runway development alternative (See Section 6.C.1.1.9, *Significant Noise Analysis*) concluded that both a 1.5 dB increase and a 3 dB increase in noise would occur within the 65+ DNL noise contour for each of the runway development alternatives as compared to the 2012 No Action Alternative.

The noise screening analysis of potential impacts associated with all projected arrival and departure operations for 2012 between the altitudes of 3,000 feet and 10,000 feet Above Ground Level (AGL) (See Section 6.C.1.1.9, *Significant Noise Analysis*) indicates that none of the runway development alternatives would cause a significant (5 dB) change between the 45 and 60 DNL contour.

**Table 6.B-12**  
**MAXIMUM CRITERIA POLLUTANT DESIGN CONCENTRATIONS**  
**Fort Lauderdale-Hollywood International Airport**

ALTERNATIVES	MAXIMUM POLLUTANT CONCENTRATIONS ( $\mu\text{g}/\text{m}^3$ )									
	CO		NO <sub>x</sub>	SO <sub>x</sub>		PM <sub>10</sub>	PM <sub>2.5</sub>			
	1-HR	8-HR	ANNUAL	3-HR	24-HR	ANNUAL	24-HR	ANNUAL	24-HR	ANNUAL
USEPA NAAQS	40,000	10,000	100	1,300	365	80	150	35	15	15
BACKGROUND CONCENTRATIONS	4,650.65	3,436.44	16.56	74.18	13.09	3.49	54.78	20.75	8.43	8.43
2005 Existing Conditions	26,919.89	9,160.52	96.93	125.13	26.65	7.20	60.87	25.80	10.24	10.24
<b>2012 RUNWAY DEVELOPMENT ALTERNATIVES</b>										
Alternative A	22,415.37	8,331.83	75.34	133.85	30.57	7.12	64.74	30.50	10.96	10.96
Alternative B1	22,260.88	8,316.37	74.46	119.68	26.52	6.84	63.25	28.92	10.80	10.80
Alternative B1b	22,260.88	8,318.06	74.47	119.70	26.53	6.84	63.25	28.92	10.80	10.80
Alternative B1c	22,257.29	8,330.01	74.48	120.78	26.58	6.88	63.33	29.00	10.82	10.82
Alternative B4	22,262.29	8,325.65	74.56	120.61	26.98	6.87	63.12	28.74	10.82	10.82
Alternative B5	22,260.83	8,319.76	74.57	119.93	26.55	6.87	63.27	28.94	10.81	10.81
Alternative C1	22,074.17	8,291.45	74.14	120.42	25.99	6.81	63.07	28.25	10.78	10.78
Alternative D1	22,260.88	8,318.06	74.47	119.70	26.53	6.84	63.25	28.92	10.80	10.80
Alternative D2	22,262.29	8,325.65	74.56	120.61	26.98	6.87	63.12	28.74	10.82	10.82

**Table 6.B-12 (Continued)**  
**MAXIMUM CRITERIA POLLUTANT DESIGN CONCENTRATIONS**  
**Fort Lauderdale-Hollywood International Airport**

ALTERNATIVES	MAXIMUM POLLUTANT CONCENTRATIONS ( $\mu\text{g}/\text{m}^3$ )									
	CO		NO <sub>x</sub> ANNUAL	SO <sub>x</sub>		PM <sub>10</sub> 24-HR	PM <sub>2.5</sub>			
	1-HR	8-HR		3-HR	24-HR		24-HR	ANNUAL		
USEPA NAAQS	40,000	10,000	100	1,300	365	150	35	15		
BACKGROUND CONCENTRATIONS	4,650.65	3,436.44	16.56	74.18	13.09	54.78	20.75	8.43		
2005 Existing Conditions	26,919.89	9,160.52	96.93	125.13	26.65	60.87	25.80	10.24		
<b>2020 RUNWAY DEVELOPMENT ALTERNATIVES</b>										
Alternative A	26,244.97	9,218.69	72.95	165.70	37.50	70.29	35.56	12.11		
Alternative B1	24,657.20	9,149.29	65.95	126.88	29.53	65.88	31.55	11.37		
Alternative B1b	24,657.20	9,156.11	66.04	126.90	29.58	65.91	31.58	11.38		
Alternative B1c	24,765.72	9,165.24	65.97	127.55	29.56	65.90	31.57	11.37		
Alternative B4	24,765.72	9,162.20	65.94	127.52	29.56	65.90	31.57	11.37		
Alternative B5	24,751.07	9,169.98	<b>66.37</b>	127.00	29.38	66.50	32.18	11.44		
Alternative C1	23,780.07	8,197.12	65.29	127.74	28.93	65.54	31.21	11.32		
Alternative D1	24,599.83	9,100.15	68.52	129.27	28.79	65.46	30.98	11.32		
Alternative D2	24,686.07	9,081.22	67.63	130.81	29.58	65.34	30.87	11.29		

Note: The 2005 background concentrations and results of the 2005 Existing Conditions dispersion analysis are shown in the table only for reference. Background concentrations are already included in all the values shown for each alternative, including 2005 Existing Conditions.

The full build-out of Alternative D1 is not anticipated to occur until 2020. The 2012 Alternative D1 includes the construction and implementation of Alternative B1b. The 2020 Alternative D1 includes the construction and implementation of Alternative B1b, followed in subsequent years by the construction and implementation of a second parallel runway north of Runway 9L/27R with the same physical configuration as Alternative C1. The 2020 Alternative D1 combines the benefits associated with both Alternative B1b and Alternative C1. See Chapter Four, Alternatives, Section 4.2.2.6, Runway Development Alternatives Screening Results, Subsection, D Alternatives – South and North Airfield Development.

**Table 6.B-12 (Continued)**  
**MAXIMUM CRITERIA POLLUTANT DESIGN CONCENTRATIONS**  
**Fort Lauderdale-Hollywood International Airport**

The full build-out of Alternative D2 is not anticipated to occur until 2020. The 2012 Alternative D2 includes the construction and implementation of Alternative B4. The 2020 Alternative D2 includes the construction and implementation of Alternative B4, followed in subsequent years by the construction and implementation of a second parallel runway north of Runway 9L/27R with the same physical configuration as Alternative C1. The 2020 Alternative D2 combines the benefits associated with both Alternative B4 and Alternative C1. See Chapter Four, Alternatives, Section 4.2.2.6, Runway Development Alternatives Screening Results, Subsection, D Alternatives – South and North Airfield Development.

Source: FAA, EDMS Version 4.5, 2006.  
Landrum & Brown analysis, 2007.

**Table 6.B-13**  
**IMPACT OF CRITERIA POLLUTANT CONCENTRATIONS**  
**Fort Lauderdale-Hollywood International Airport**

RUNWAY DEVELOPMENT ALTERNATIVES	POLLUTANT CONCENTRATION IMPACTS ( $\mu\text{g}/\text{m}^3$ )									
	CO		NO <sub>x</sub>		SO <sub>x</sub>		PM <sub>10</sub>		PM <sub>2.5</sub>	
	1-HR	8-HR	ANNUAL	3-HR	24-HR	ANNUAL	ANNUAL	ANNUAL	24-HR	ANNUAL
<b>2012 RUNWAY DEVELOPMENT ALTERNATIVES</b>										
Alternative B1	-154.49	-15.46	-0.88	-14.17	-4.05	-0.28	-1.49	-1.58	-0.16	-0.16
Alternative B1b	-154.49	-13.78	-0.87	-14.15	-4.05	-0.28	-1.49	-1.58	-0.16	-0.16
Alternative B1c	-158.08	-1.83	-0.85	-13.07	-4.00	-0.25	-1.42	-1.50	-0.13	-0.13
Alternative B4	-153.07	-6.18	-0.78	-13.24	-3.59	-0.25	-1.62	-1.75	-0.14	-0.14
Alternative B5	-154.54	-12.07	-0.76	-13.92	-4.03	-0.25	-1.48	-1.56	-0.14	-0.14
Alternative C1	-341.20	-40.38	-1.20	-13.43	-4.58	-0.31	-1.68	-2.25	-0.18	-0.18
Alternative D1	-154.49	-13.78	-0.87	-14.15	-4.05	-0.28	-1.49	-1.58	-0.16	-0.16
Alternative D2	-153.07	-6.18	-0.78	-13.24	-3.59	-0.25	-1.62	-1.75	-0.14	-0.14
<b>2020 RUNWAY DEVELOPMENT ALTERNATIVES</b>										
Alternative B1	-1,587.77	-69.40	-7.00	-38.82	-7.97	-1.48	-4.41	-4.01	-0.74	-0.74
Alternative B1b	-1,587.77	-62.57	-6.91	-38.79	-7.92	-1.47	-4.38	-3.98	-0.73	-0.73
Alternative B1c	-1,479.24	-53.45	-6.98	-38.15	-7.94	-1.48	-4.39	-3.99	-0.74	-0.74
Alternative B4	-1,479.24	-56.49	-7.01	-38.18	-7.94	-1.48	-4.39	-3.99	-0.74	-0.74
Alternative B5	-1,493.90	-48.70	<b>-6.58</b>	-38.70	-8.12	-1.47	-3.79	-3.39	-0.67	-0.67
Alternative C1	-2,464.90	-1,021.57	-7.65	-37.96	-8.57	-1.55	-4.75	-4.36	-0.79	-0.79
Alternative D1	-1,645.14	-118.54	-4.43	-36.43	-8.71	-1.30	-4.83	-4.59	-0.79	-0.79
Alternative D2	-1,558.89	-137.47	-5.32	-34.89	-7.92	-1.31	-4.95	-4.69	-0.82	-0.82

**Table 6.B-13 (Continued)  
IMPACT OF CRITERIA POLLUTANT CONCENTRATIONS  
Fort Lauderdale-Hollywood International Airport**

Note: Values in this table reflect the design concentrations provided in Table 6.B-10 for each runway development alternative minus the Alternative A (No Action) of the same future year.

The full build-out of Alternative D1 is not anticipated to occur until 2020. The 2012 Alternative D1 includes the construction and implementation of Alternative B1b. The 2020 Alternative D1 includes the construction and implementation of Alternative B1b, followed in subsequent years by the construction and implementation of a second parallel runway north of Runway 9L/27R with the same physical configuration as Alternative C1. The 2020 Alternative D1 combines the benefits associated with both Alternative B1b and Alternative C1. See Chapter Four, Alternatives, Section 4.2.2.6, Runway Development Alternatives Screening Results, Subsection, D Alternatives – South and North Airfield Development.

The full build-out of Alternative D2 is not anticipated to occur until 2020. The 2012 Alternative D2 includes the construction and implementation of Alternative B4. The 2020 Alternative D2 includes the construction and implementation of Alternative B4, followed in subsequent years by the construction and implementation of a second parallel runway north of Runway 9L/27R with the same physical configuration as Alternative C1. The 2020 Alternative D2 combines the benefits associated with both Alternative B4 and Alternative C1. See Chapter Four, Alternatives, Section 4.2.2.6, Runway Development Alternatives Screening Results, Subsection, D Alternatives – South and North Airfield Development.

Source: FAA, EDMS Version 4.5, 2006.  
Landrum & Brown analysis, 2007.