


# Airman Knowledge Testing Supplement for Aviation Maintenance Technician - General, Airframe, and Powerplant; and Parachute Rigger



U.S. Department  
of Transportation

Federal Aviation  
Administration

DO NOT MARK IN THIS BOOK

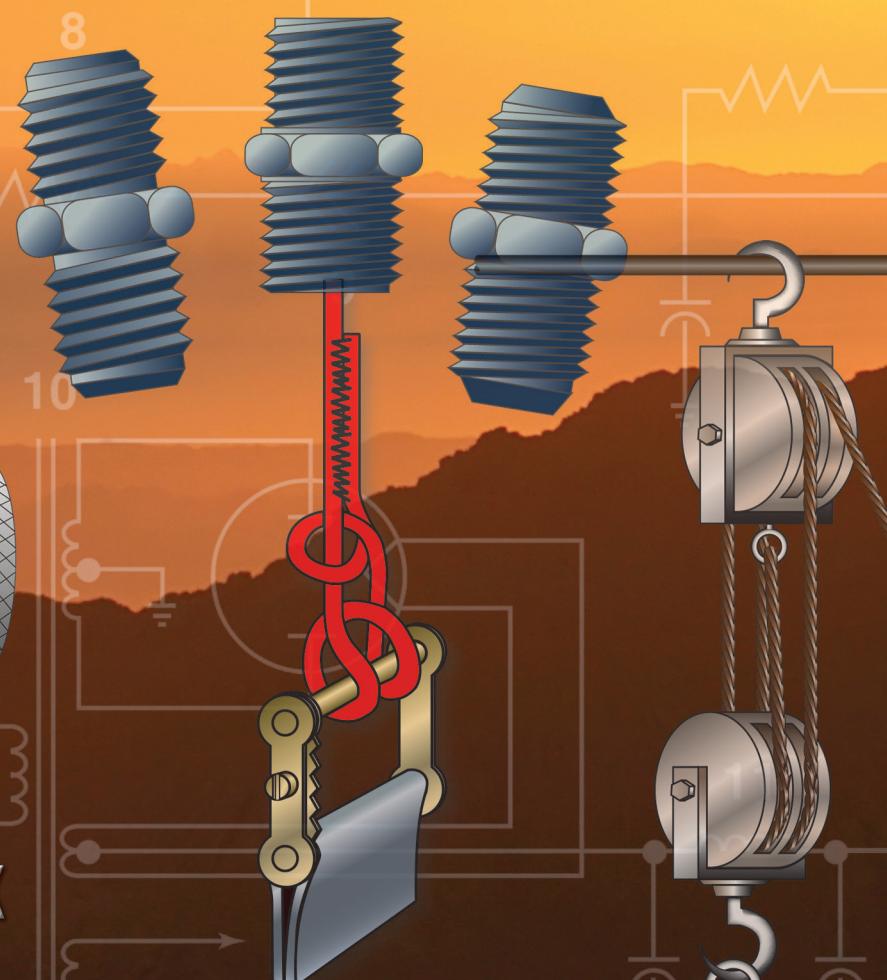



# Airman Knowledge Testing Supplement for Aviation Maintenance Technician – General, Airframe, and Powerplant; and Parachute Rigger

2018

U.S. Department of Transportation  
**FEDERAL AVIATION ADMINISTRATION**  
Flight Standards Service



# Preface

This testing supplement supersedes FAA-CT-8080-4F, Airman Knowledge Testing Supplement for Aviation Mechanic General, Powerplant, and Airframe; and Parachute Rigger, dated 2013. This Airman Knowledge Testing Supplement is designed by the Federal Aviation Administration (FAA) Flight Standards Service. It is intended for use by Airman Knowledge Testing (AKT) Organization Designation Authorization (ODA) Holders and other entities approved and/or authorized to administer airman knowledge tests on behalf of the FAA in the following knowledge areas:

Aviation Mechanic General—AMG  
Aviation Mechanic Powerplant—AMP  
Aviation Mechanic Airframe—AMA  
Parachute Rigger—RIG, RMC, RMP

Comments regarding this supplement, or any Airman Testing publication, should emailed to AFS630comments@faa.gov.



# Contents

Preface.....	iii
Contents.....	v

## Appendix 1 - Aviation Mechanic General

Figure 1. Equation.....	1-1
Figure 2. Equation.....	1-2
Figure 3. Equation.....	1-3
Figure 4. Circuit diagram.....	1-4
Figure 5. Formula.....	1-5
Figure 6. Circuit diagram.....	1-6
Figure 7. Circuit diagram.....	1-7
Figure 8. Circuit diagram.....	1-8
Figure 9. Circuit diagram.....	1-9
Figure 10. Battery circuit.....	1-10
Figure 11. Circuit diagram.....	1-11
Figure 12. Circuit diagram.....	1-12
Figure 13. Circuit diagram.....	1-13
Figure 14. Circuit diagram.....	1-14
Figure 15. Landing gear circuit.....	1-15
Figure 16. Fuel system circuit.....	1-16
Figure 17. Electrical symbols.....	1-17
Figure 18. Landing gear circuit.....	1-18
Figure 19. Landing gear circuit.....	1-19
Figure 20. Circuit diagram.....	1-20
Figure 21. Electrical symbols.....	1-21
Figure 22. Transistors.....	1-22
Figure 23. Transistorized circuit.....	1-23
Figure 24. Logic gate.....	1-24
Figure 25. Logic gate.....	1-25
Figure 26. Logic gate.....	1-26
Figure 27. Object views.....	1-27
Figure 28. Object views.....	1-28
Figure 29. Object views.....	1-29
Figure 30. Object views.....	1-30
Figure 31. Sketches.....	1-31
Figure 32. Sketches.....	1-32
Figure 33. Material symbols.....	1-33
Figure 34. Aircraft drawing.....	1-34
Figure 35. Aircraft drawing.....	1-35
Figure 36. Aircraft drawing.....	1-36
Figure 37. Aircraft drawing.....	1-37
Figure 38. Performance chart.....	1-38
Figure 39. Electric wire chart.....	1-39
Figure 40. Cable tension chart.....	1-40
Figure 41. Performance chart.....	1-41
Figure 42. Aircraft hardware.....	1-42

<b>Figure 43.</b> Aircraft hardware.....	1-43
<b>Figure 44.</b> Welds. ....	1-44
<b>Figure 45.</b> Welds. ....	1-45
<b>Figure 46.</b> Precision measurement. ....	1-46
<b>Figure 47.</b> Precision measurement. ....	1-47
<b>Figure 48.</b> Precision measurement. ....	1-48
<b>Figure 49.</b> Precision measurement. ....	1-49
<b>Figure 50.</b> Marshalling signals. ....	1-50
<b>Figure 51.</b> Marshalling signals. ....	1-51
<b>Figure 52.</b> Equation. ....	1-52
<b>Figure 53.</b> Equation. ....	1-53
<b>Figure 54.</b> Trapezoid area.....	1-54
<b>Figure 55.</b> Triangle area. ....	1-55
<b>Figure 56.</b> Trapezoid area.....	1-56
<b>Figure 57.</b> Triangle area. ....	1-57
<b>Figure 58.</b> Equation. ....	1-58
<b>Figure 59.</b> Equation. ....	1-59
<b>Figure 60.</b> Equation. ....	1-60
<b>Figure 61.</b> Physics. ....	1-61
<b>Figure 62.</b> Maintenance data - part 1 of 3. ....	1-62
<b>Figure 62A.</b> Maintenance data - part 2 of 3.....	1-63
<b>Figure 62B.</b> Maintenance data - part 3 of 3.....	1-64
<b>Figure 63.</b> Airworthiness directive excerpt. ....	1-65
<b>Figure 64.</b> Resistance total. ....	1-66
<b>Figure 65.</b> Scientific notation. ....	1-67
<b>Figure 66.</b> Equation. ....	1-68
<b>Figure 67.</b> Equation. ....	1-69
<b>Figure 68.</b> Alternative answer. ....	1-70
<b>Figure 69.</b> Equation. ....	1-71
<b>Figure 70.</b> Alternative answer. ....	1-72
<b>Figure 71.</b> Volume of a sphere. ....	1-73

## Appendix 2 - Aviation Mechanic Powerplant

<b>Figure 1.</b> Airworthiness directive excerpt. ....	2-1
<b>Figure 2.</b> Fire extinguisher pressure chart. ....	2-2
<b>Figure 3.</b> Fire extinguisher pressure chart. ....	2-3
<b>Figure 4.</b> Electric wire chart. ....	2-4
<b>Figure 5.</b> Starter-generator circuit. ....	2-5
<b>Figure 6.</b> Fuel/air ratio graphs. ....	2-6
<b>Figure 7.</b> Fuel system. ....	2-7

## Appendix 3 - Aviation Mechanic Airframe

<b>Figure 1.</b> Rivets. ....	3-1
<b>Figure 2.</b> Countersinking. ....	3-2
<b>Figure 3.</b> Grip length. ....	3-3
<b>Figure 4.</b> Bending sheet metal. ....	3-4
<b>Figure 5.</b> Sheet metal layout. ....	3-5
<b>Figure 6.</b> Sheet metal layout. ....	3-6
<b>Figure 7.</b> Sheet metal layout. ....	3-7
<b>Figure 8.</b> Control cable. ....	3-8
<b>Figure 9.</b> Cable tension chart.....	3-9

<b>Figure 10.</b> Torque value.....	3-10
<b>Figure 11.</b> Fittings.....	3-11
<b>Figure 12.</b> Backup rings.....	3-12
<b>Figure 13.</b> Cooling system.....	3-13
<b>Figure 14.</b> Pressure temperature correction chart.....	3-14
<b>Figure 15.</b> Formula.....	3-15
<b>Figure 16.</b> Antennas.....	3-16
<b>Figure 17.</b> Fuel system.....	3-17
<b>Figure 18.</b> Battery connections.....	3-18
<b>Figure 19.</b> Landing gear circuit.....	3-19
<b>Figure 20.</b> Landing gear circuit.....	3-20
<b>Figure 21.</b> Fire extinguisher chart.....	3-21
<b>Figure 22.</b> Antenna.....	3-22
<b>Figure 23.</b> Antenna.....	3-23
<b>Figure 24.</b> Antenna.....	3-24
<b>Figure 25.</b> Antenna.....	3-25
<b>Figure 26.</b> Antenna.....	3-26
<b>Figure 27.</b> Antenna.....	3-27
<b>Figure 28.</b> Antenna.....	3-28
<b>Figure 29.</b> Antenna.....	3-29
<b>Figure 30.</b> Antenna.....	3-30
<b>Figure 31.</b> Antenna.....	3-31
<b>Figure 32.</b> Antenna.....	3-32
<b>Figure 33.</b> Antenna.....	3-33
<b>Figure 34.</b> Antenna.....	3-34


#### **Appendix 4 - Parachute Rigger**

<b>Figure 1.</b> Tacking knot.....	4-1
<b>Figure 2.</b> Parachute material.....	4-2
<b>Figure 3.</b> Seam stitching.....	4-3
<b>Figure 4.</b> Suspension line attachment.....	4-4
<b>Figure 5.</b> Suspension lines.....	4-5
<b>Figure 6.</b> Fittings.....	4-6
<b>Figure 7.</b> Radial seam stitching.....	4-7
<b>Figure 8.</b> Lift web stitching.....	4-8
<b>Figure 9.</b> Knots.....	4-9
<b>Figure 10.</b> Machine stitching.....	4-10
<b>Figure 11.</b> French fell seam.....	4-11
<b>Figure 12.</b> English fell seam.....	4-12
<b>Figure 13.</b> Machine stitching.....	4-13
<b>Figure 14.</b> Machine stitching.....	4-14
<b>Figure 15.</b> Machine stitching.....	4-15
<b>Figure 16.</b> Hardware threading.....	4-16








## APPENDIX I

# Aviation Mechanic General

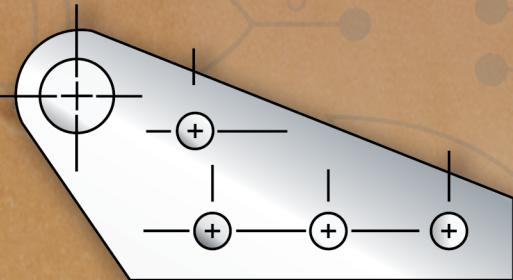

$$\frac{(-5+23)(-2)+(3^{-3})(\sqrt{64})}{-27 \div 9} =$$

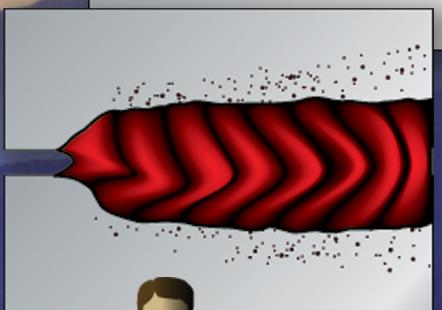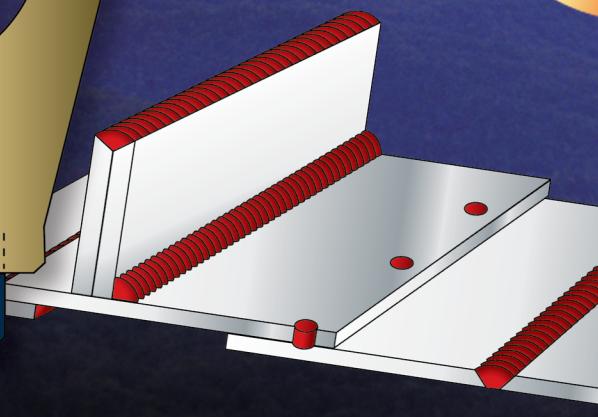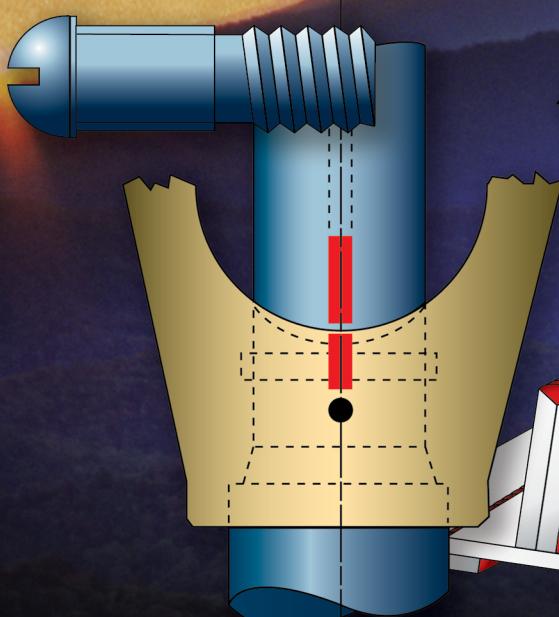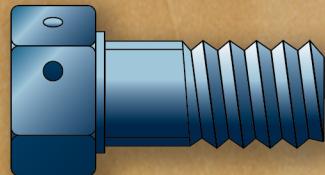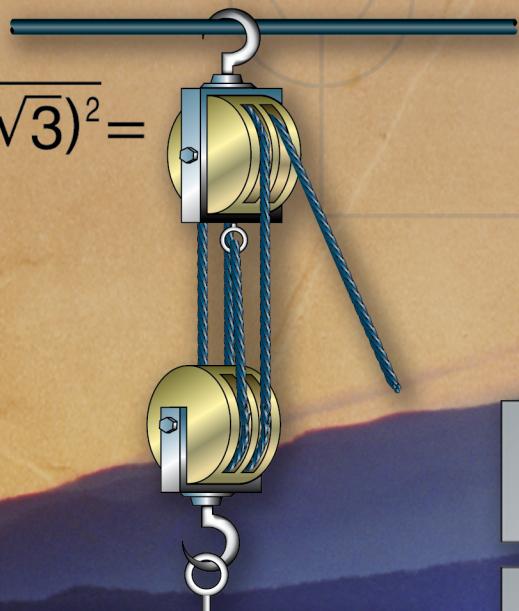

$$C_T = \frac{1}{1/C_1 + 1/C_2 + 1/C_3\dots}$$

**Figure 1.** Equation.

## Appendix 1


$$C_T = \frac{1}{1/C_1 + 1/C_2 + 1/C_3}$$

**Figure 2.** Equation.

$$L_T = \frac{1}{1/L_1 + 1/L_2 + 1/L_3 \dots}$$

**Figure 3.** Equation.

## Appendix 1

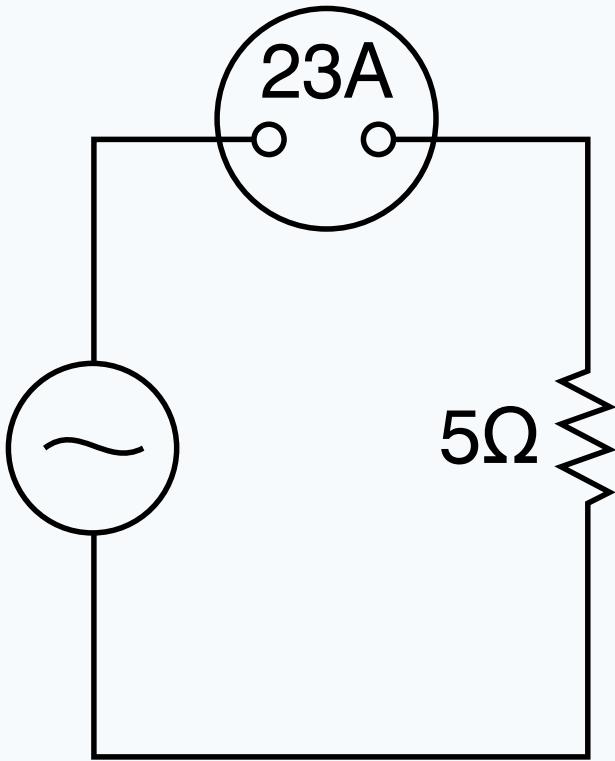

**Figure 4.** Circuit diagram.

$$Z = \sqrt{R^2 + (X_L - X_C)^2}$$

$Z$  = Impedance


$R$  = Resistance

$X_L$  = Inductive reactance

$X_C$  = Capacitive reactance

**Figure 5.** Formula.

## Appendix 1

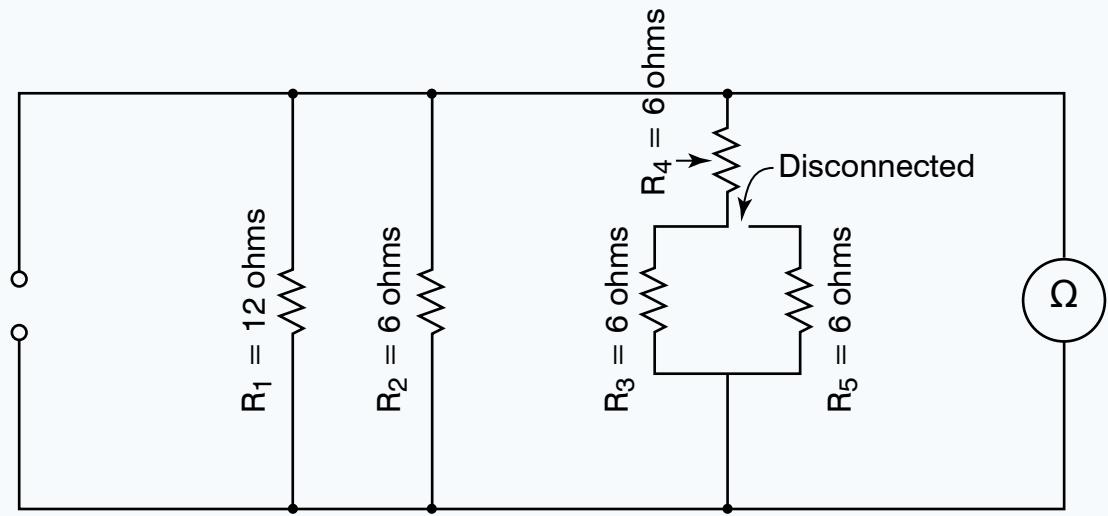

**Figure 6.** Circuit diagram.



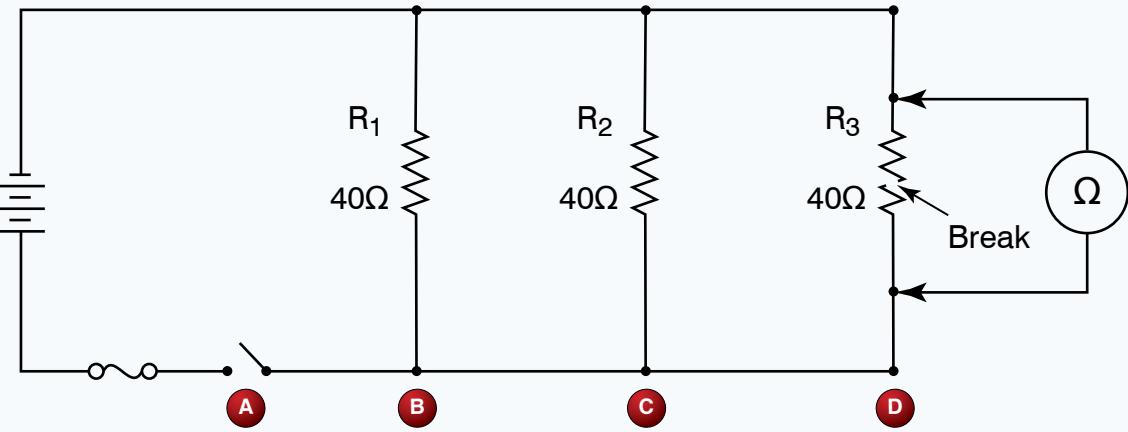


Figure 7. Circuit diagram.

## Appendix 1

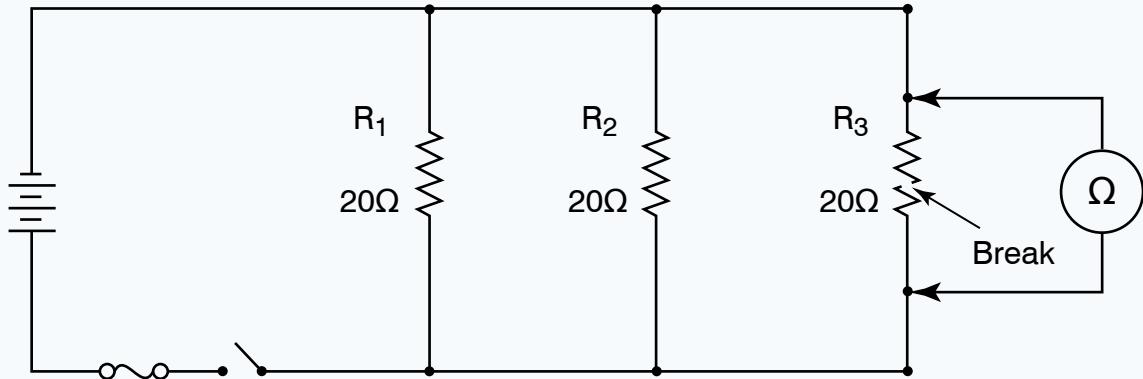


**Figure 8.** Circuit diagram.

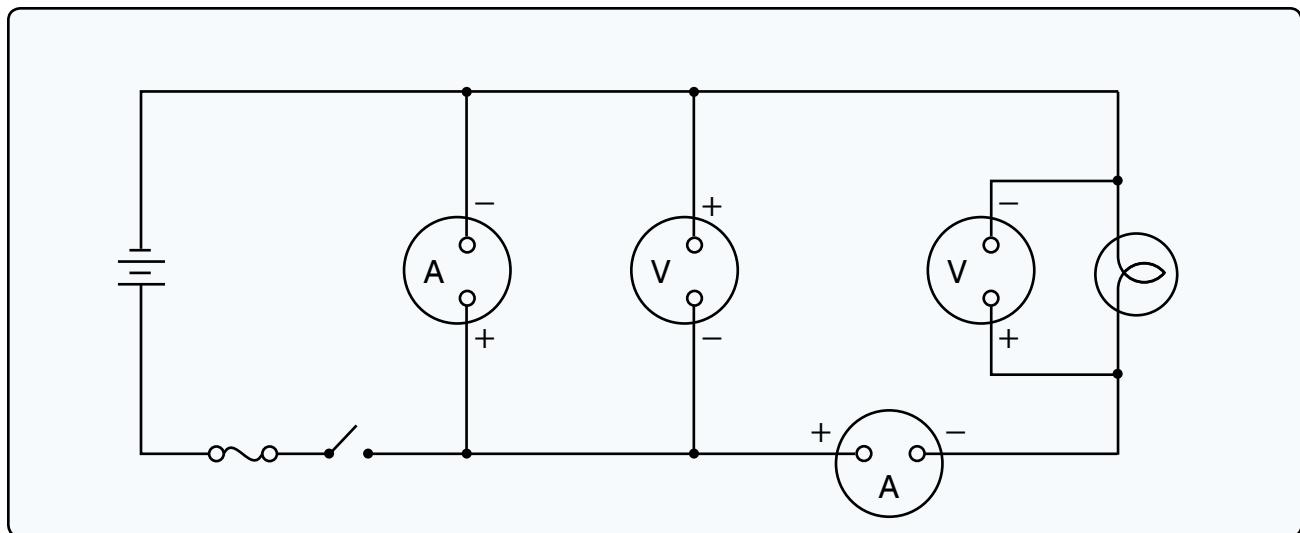

**Figure 9.** Circuit diagram.

## Appendix 1

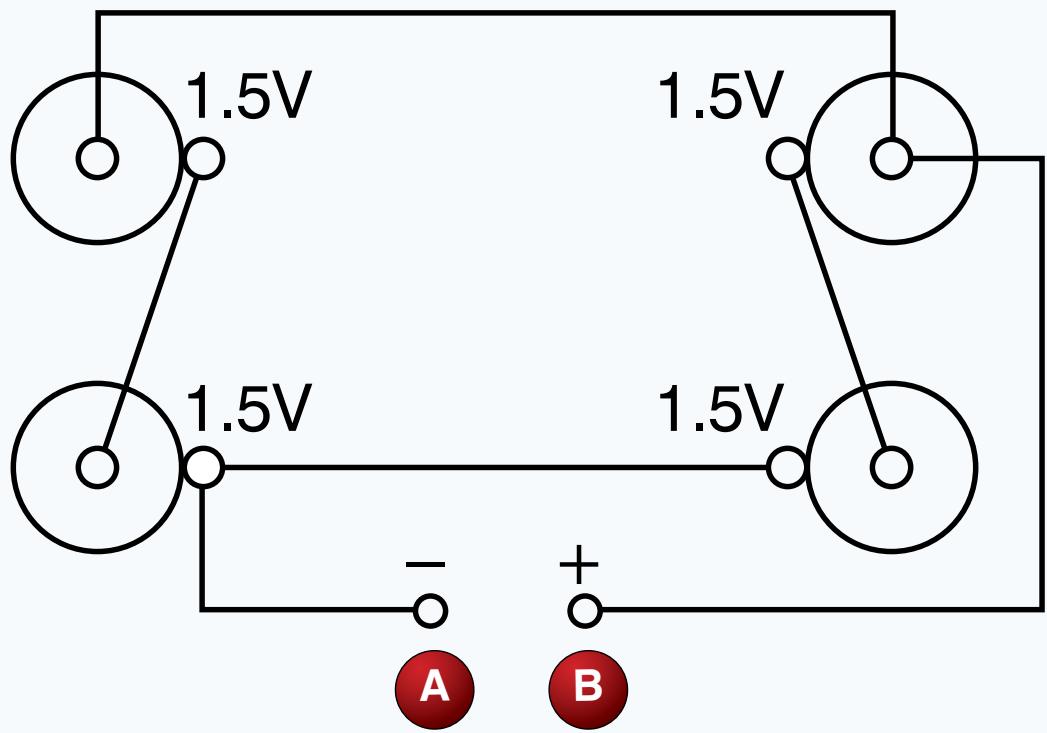

**Figure 10.** Battery circuit.

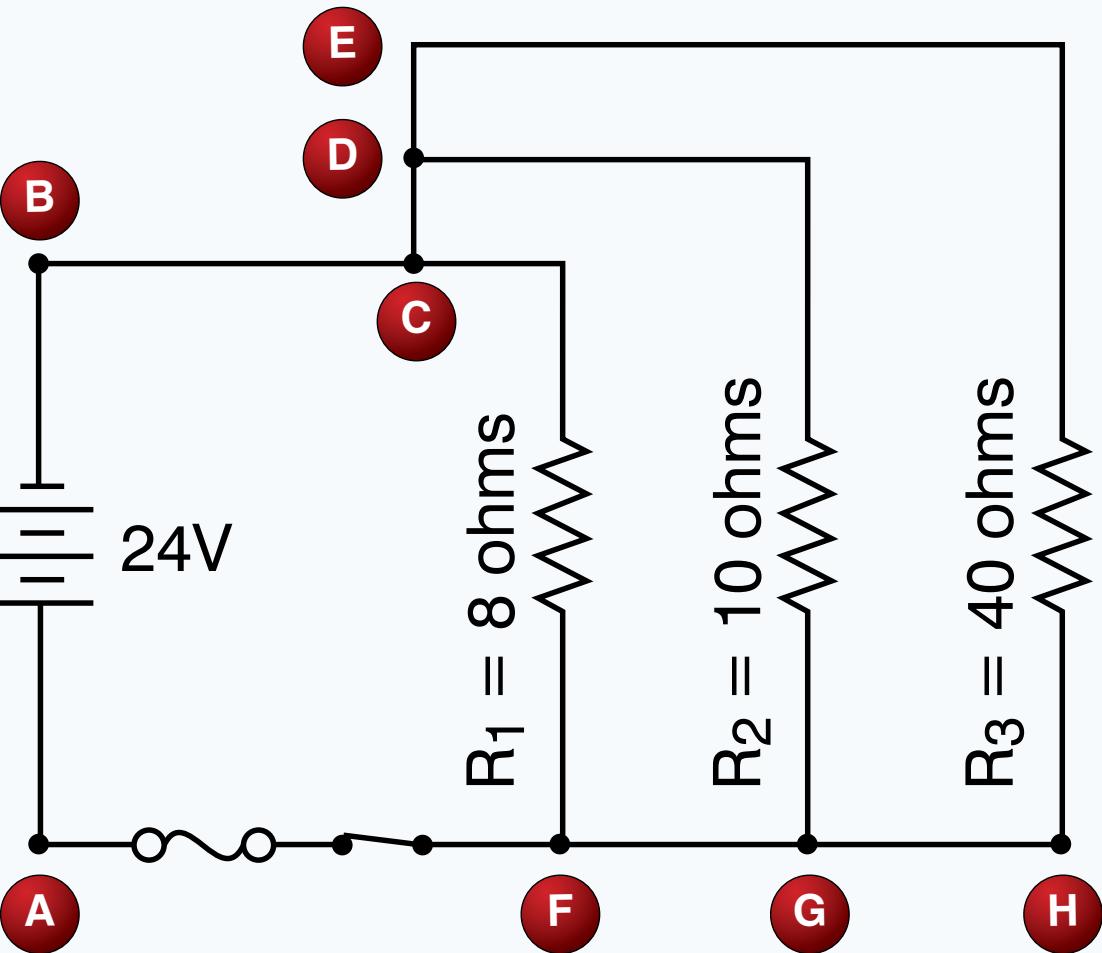


Figure 11. Circuit diagram.

## Appendix 1

$$R_a = \frac{1/R + 1/R}{4 \quad 5}$$

$$R_b = R_a + R_2$$

$$R_c = \frac{1}{1/R_b + 1/R_3}$$

$$R_t = R_c + R_1$$

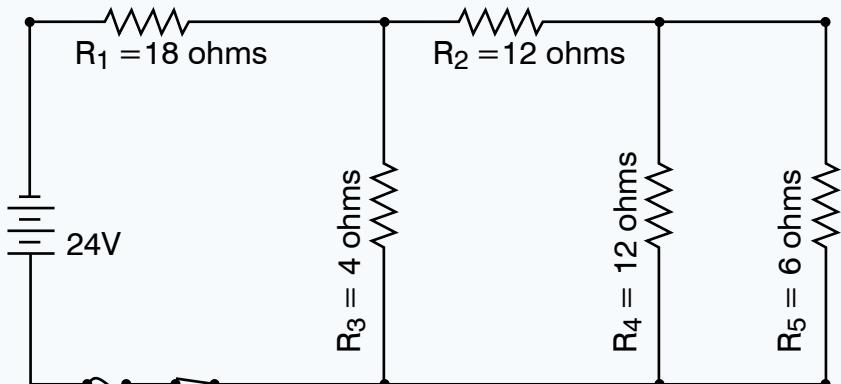


Figure 12. Circuit diagram.


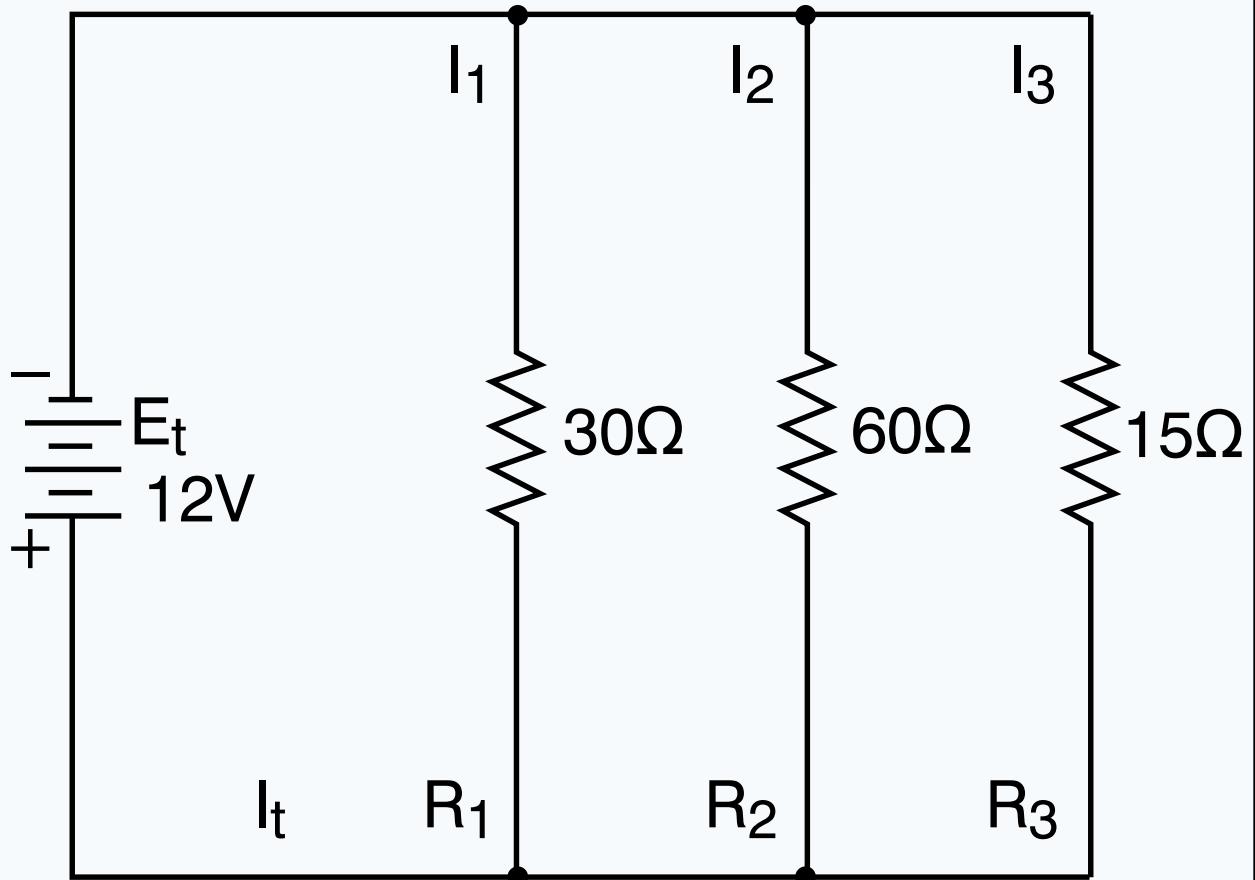


Figure 13. Circuit diagram.

## Appendix 1

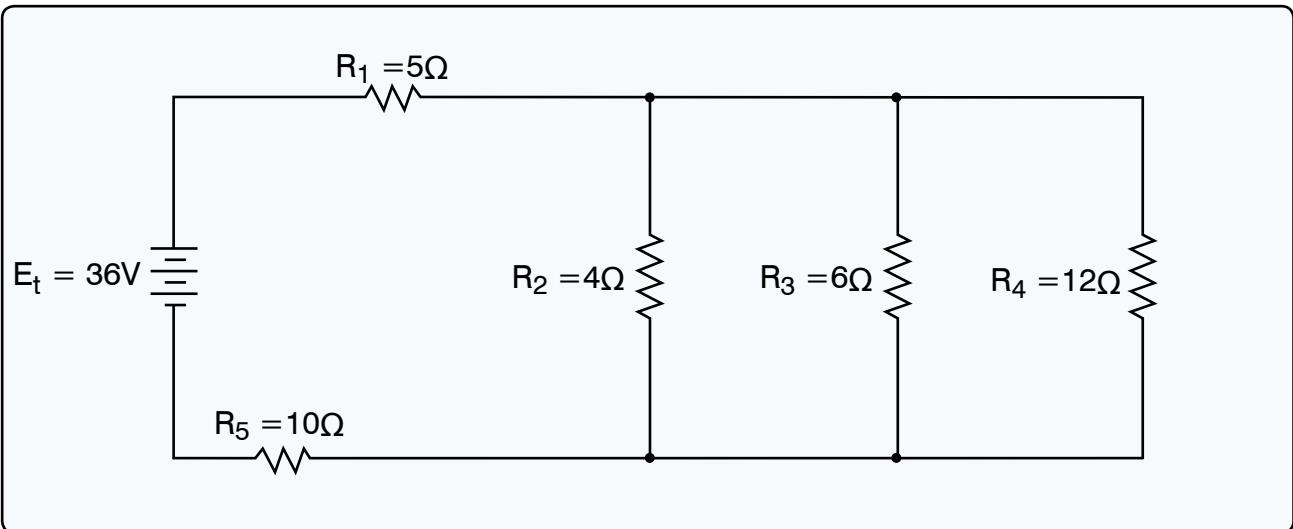

**Figure 14.** Circuit diagram.

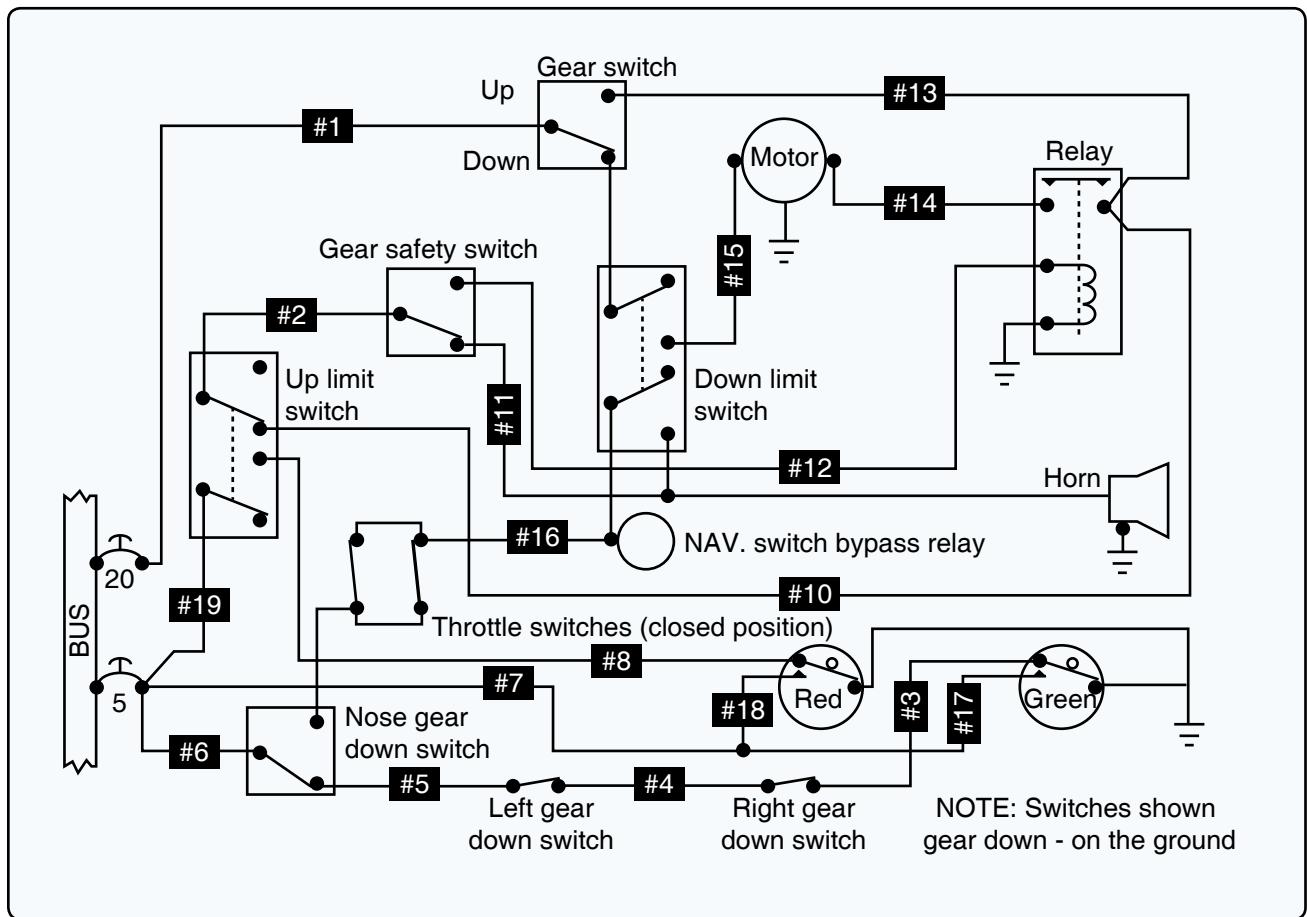


Figure 15. Landing gear circuit.

## Appendix 1

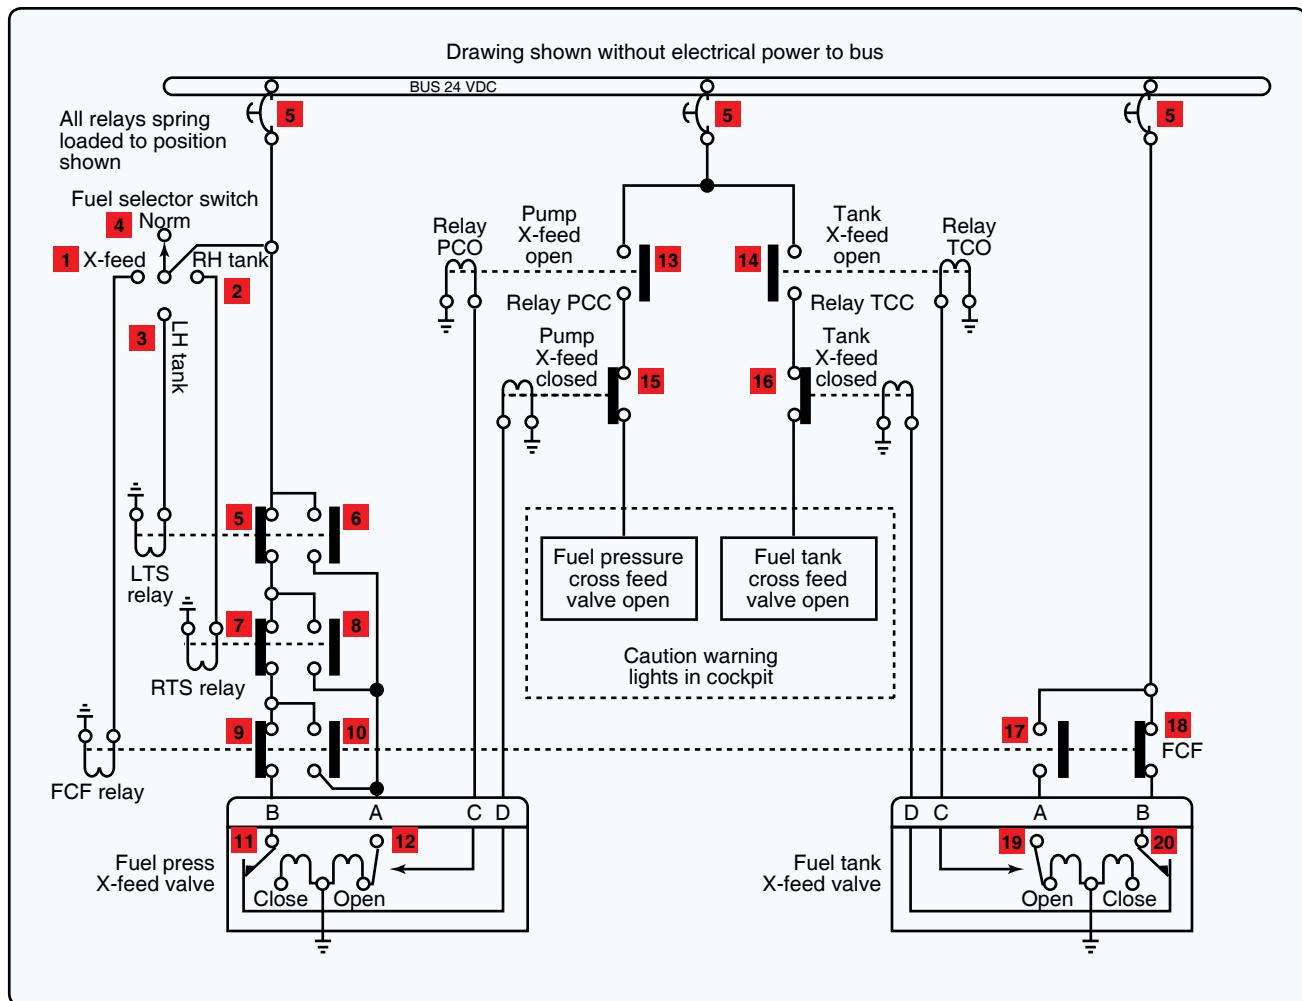
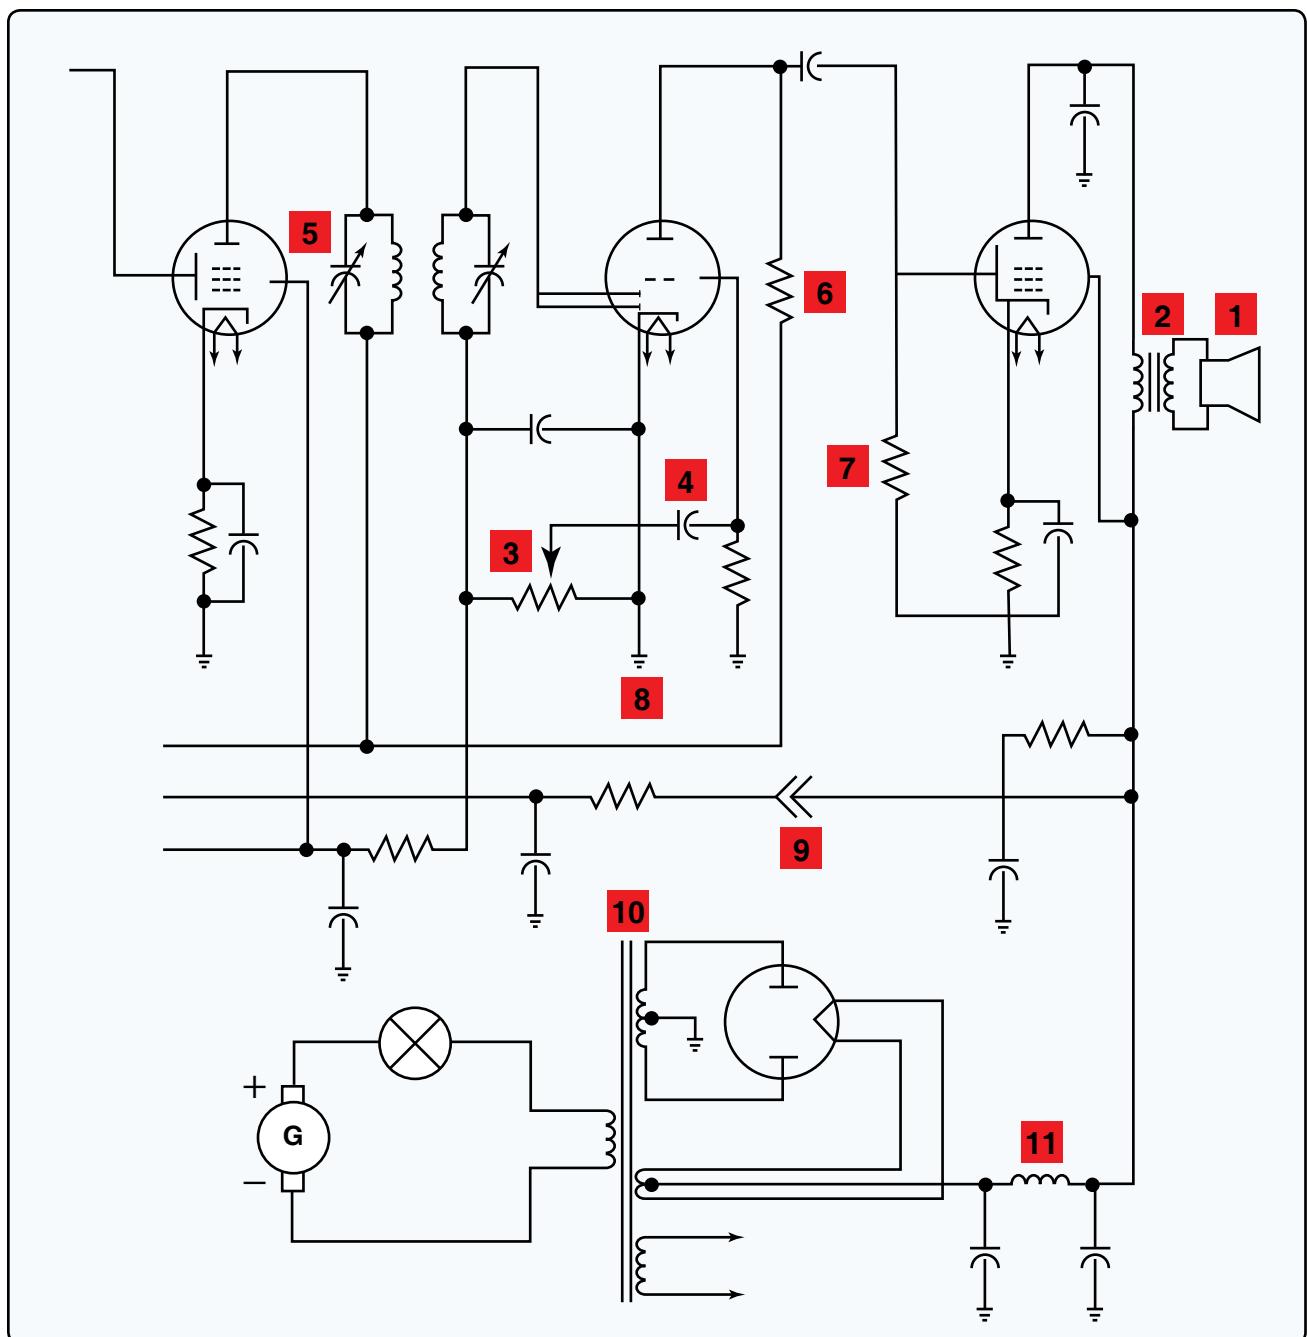


Figure 16. Fuel system circuit.

**Figure 17.** Electrical symbols.

## Appendix 1



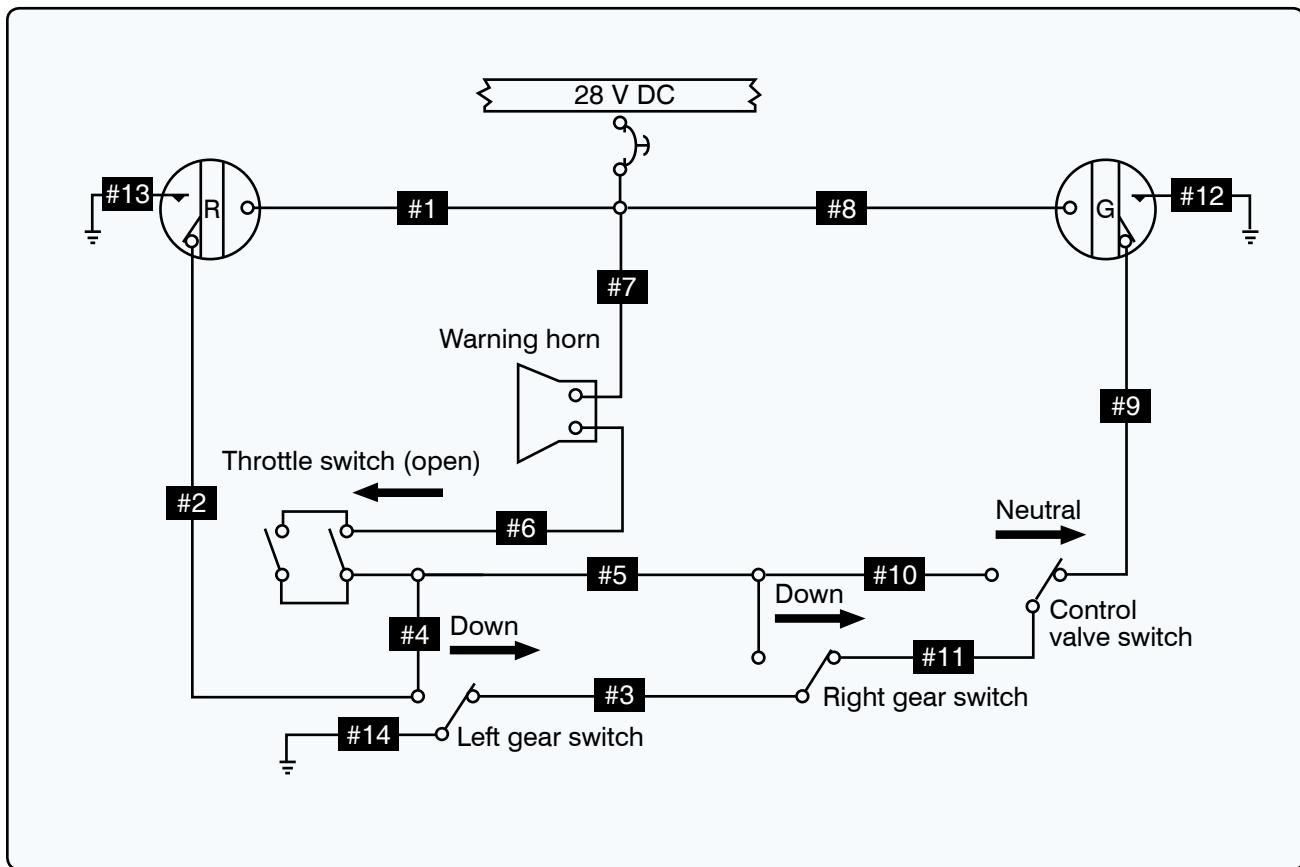


Figure 18. Landing gear circuit.

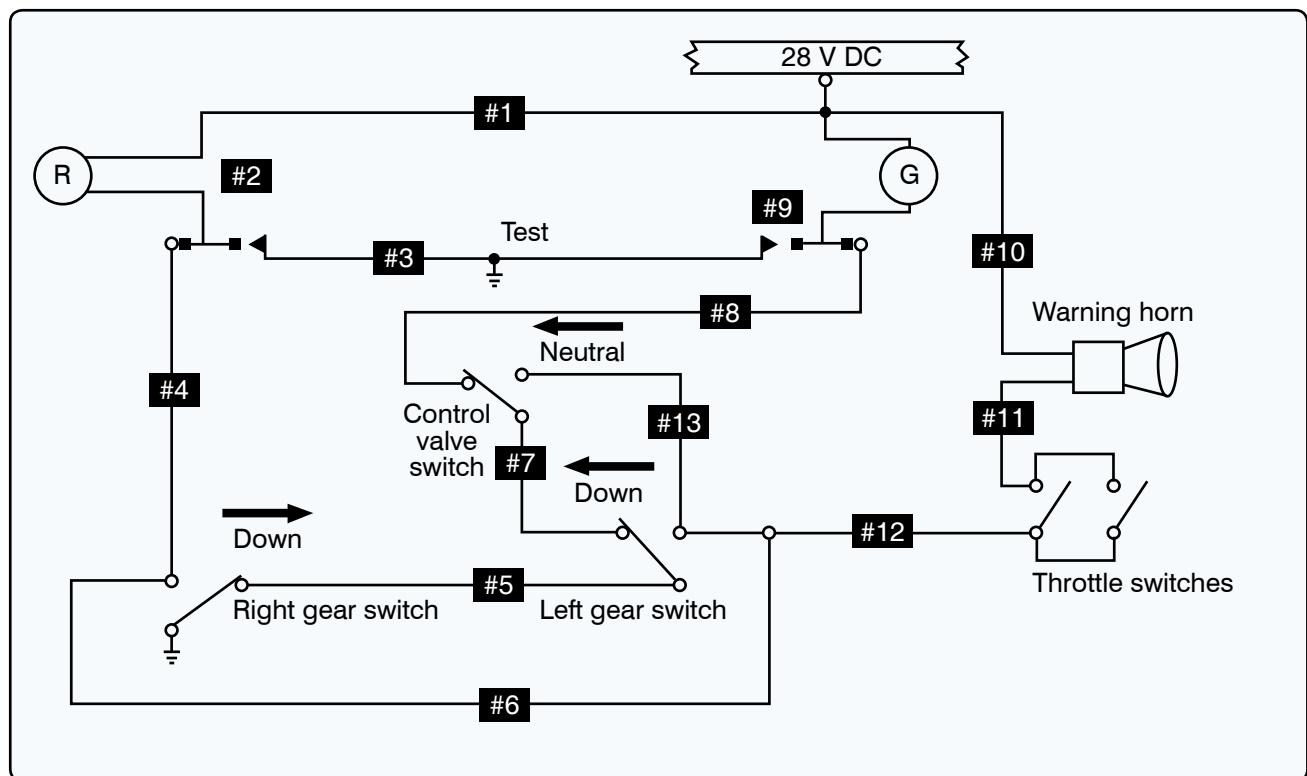


**Figure 19.** Landing gear circuit.

## Appendix 1

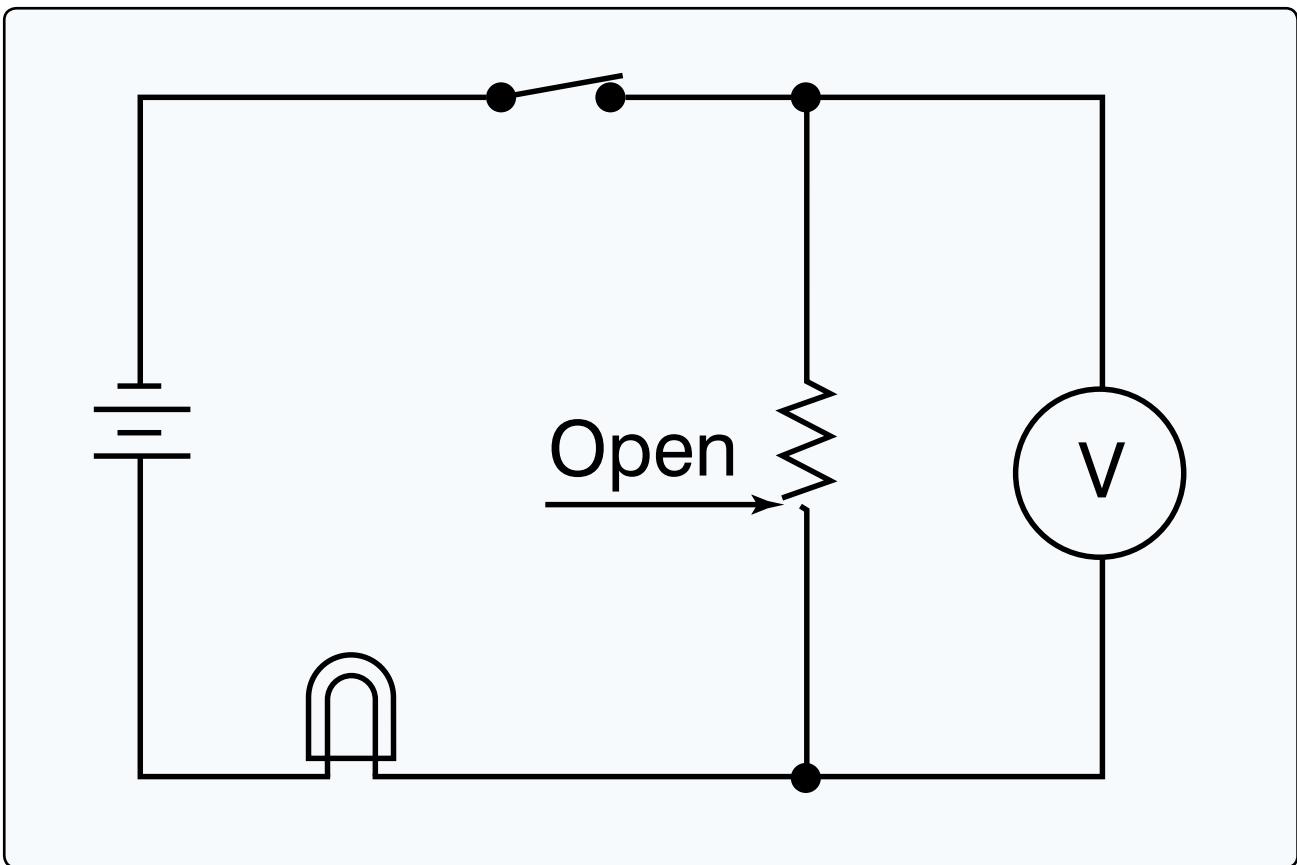


**Figure 20.** Circuit diagram.

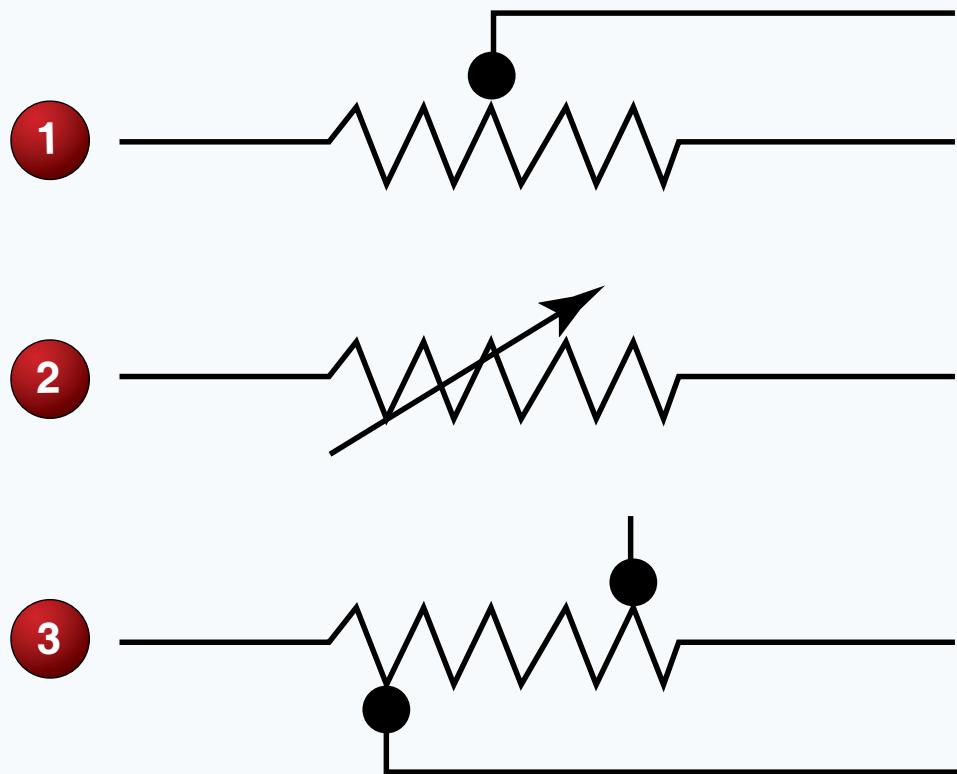

**Figure 21.** Electrical symbols.

## Appendix 1

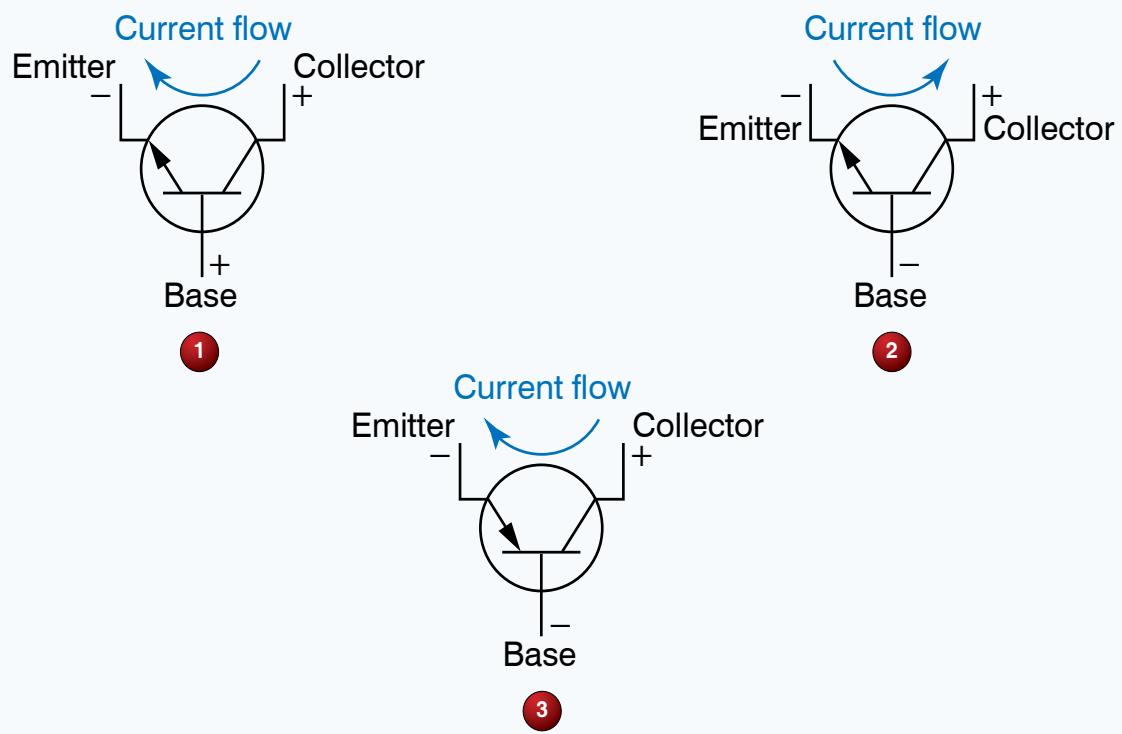

**Figure 22.** Transistors.



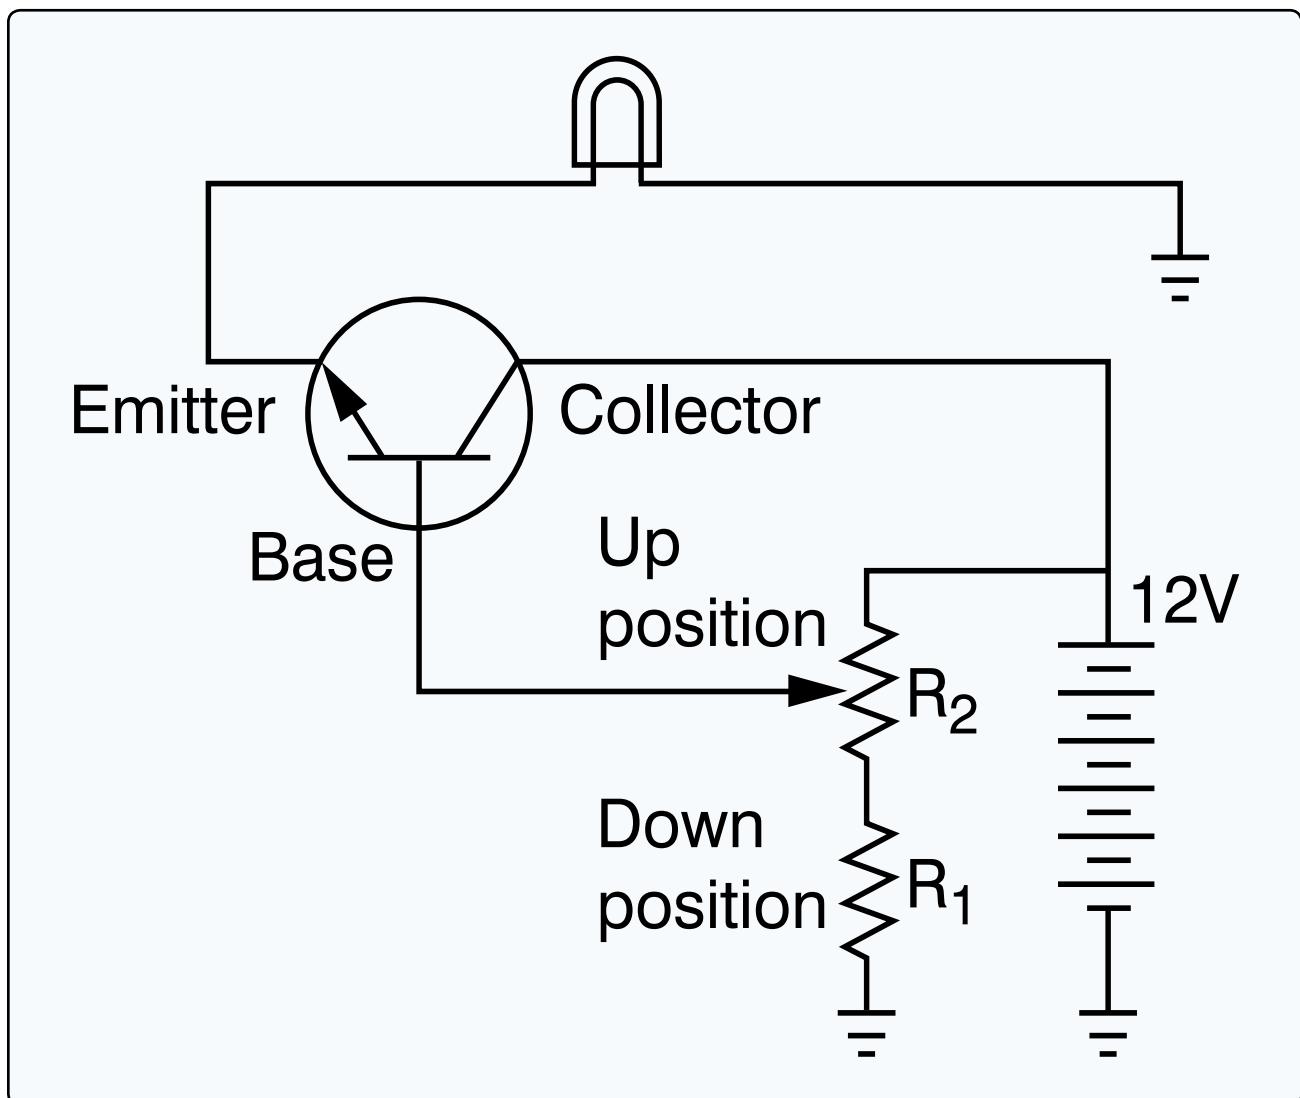


Figure 23. Transistorized circuit.

## Appendix 1

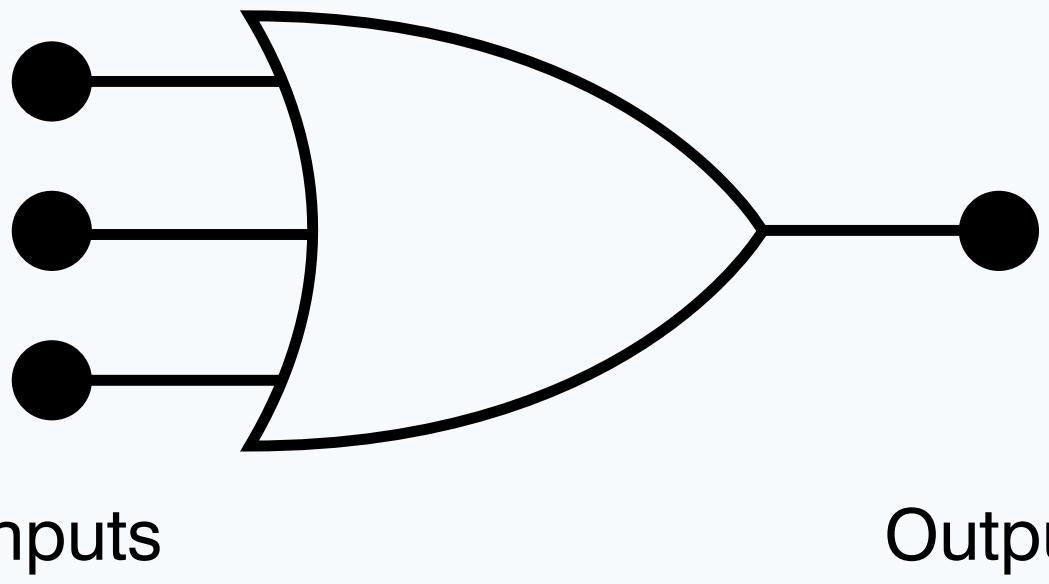


**Figure 24.** Logic gate.

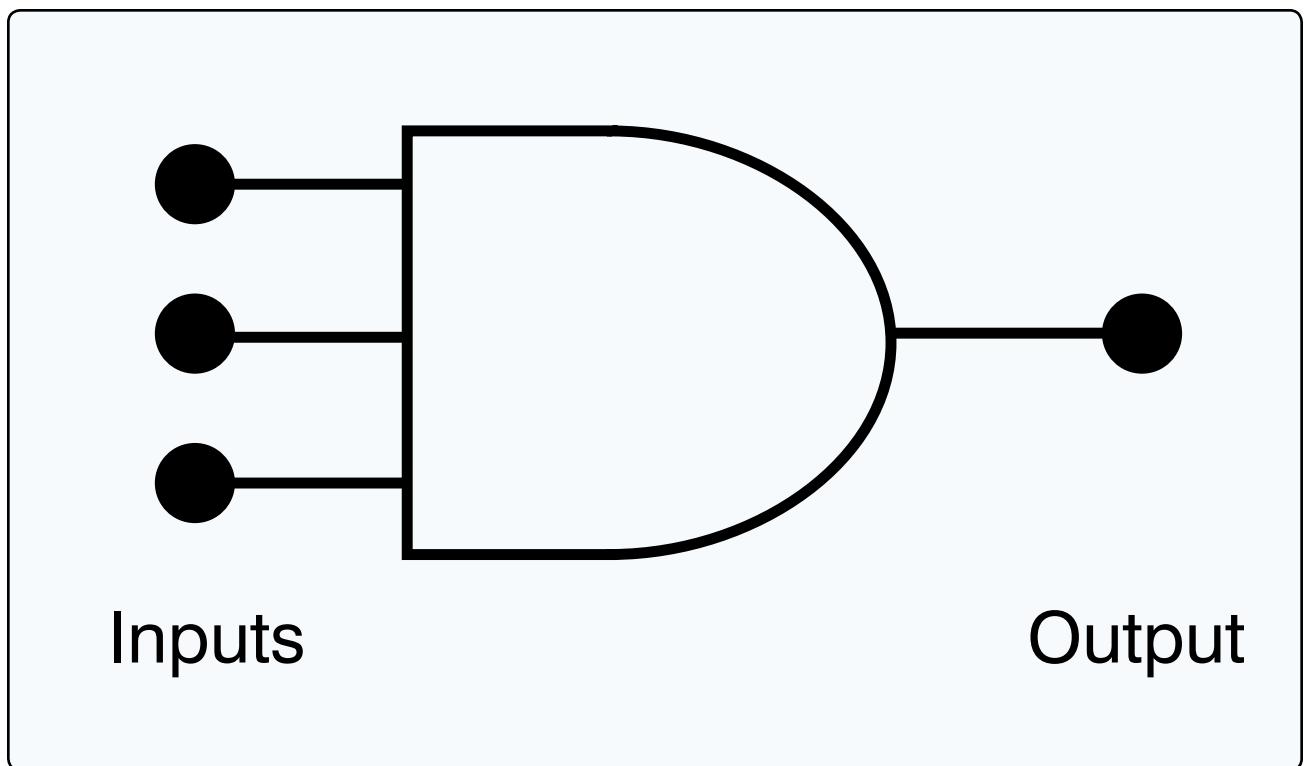


**Figure 25.** Logic gate.


## Appendix 1

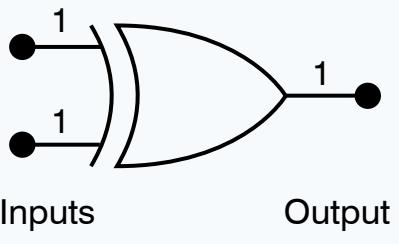

1

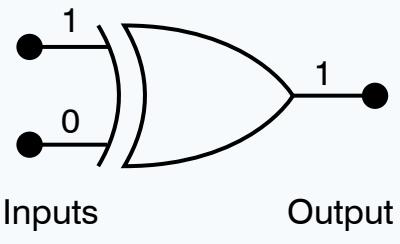


2

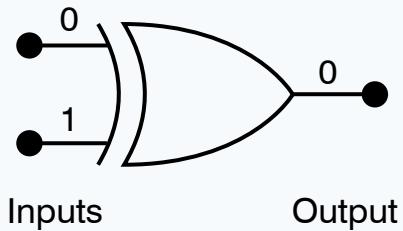


3

Figure 26. Logic gate.

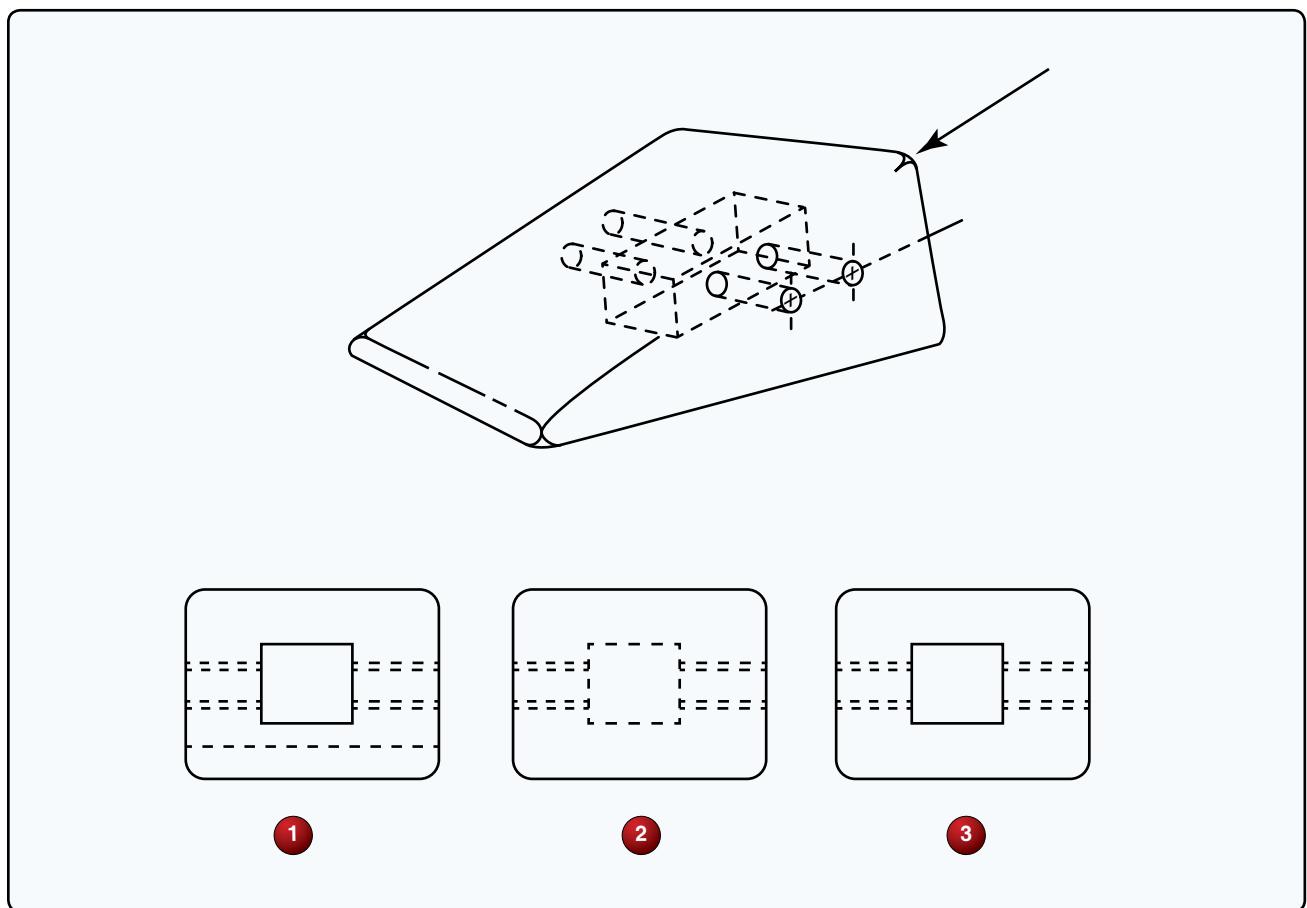


**Figure 27.** Object views.

## Appendix 1

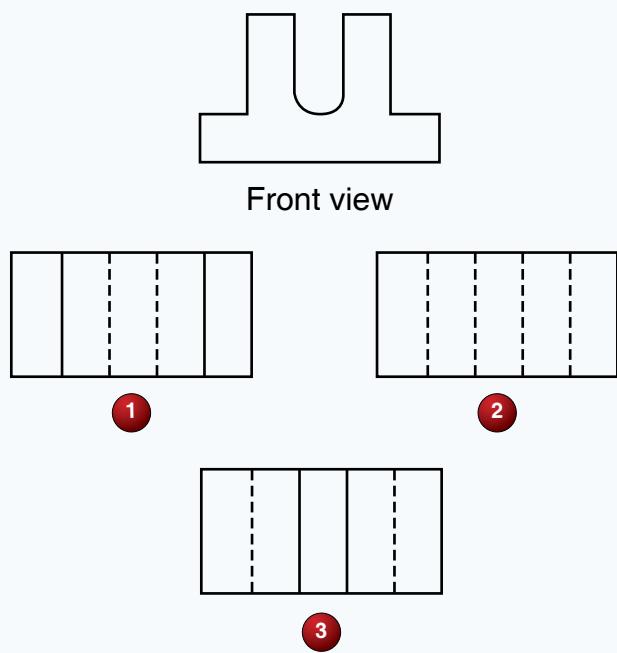


**Figure 28.** Object views.

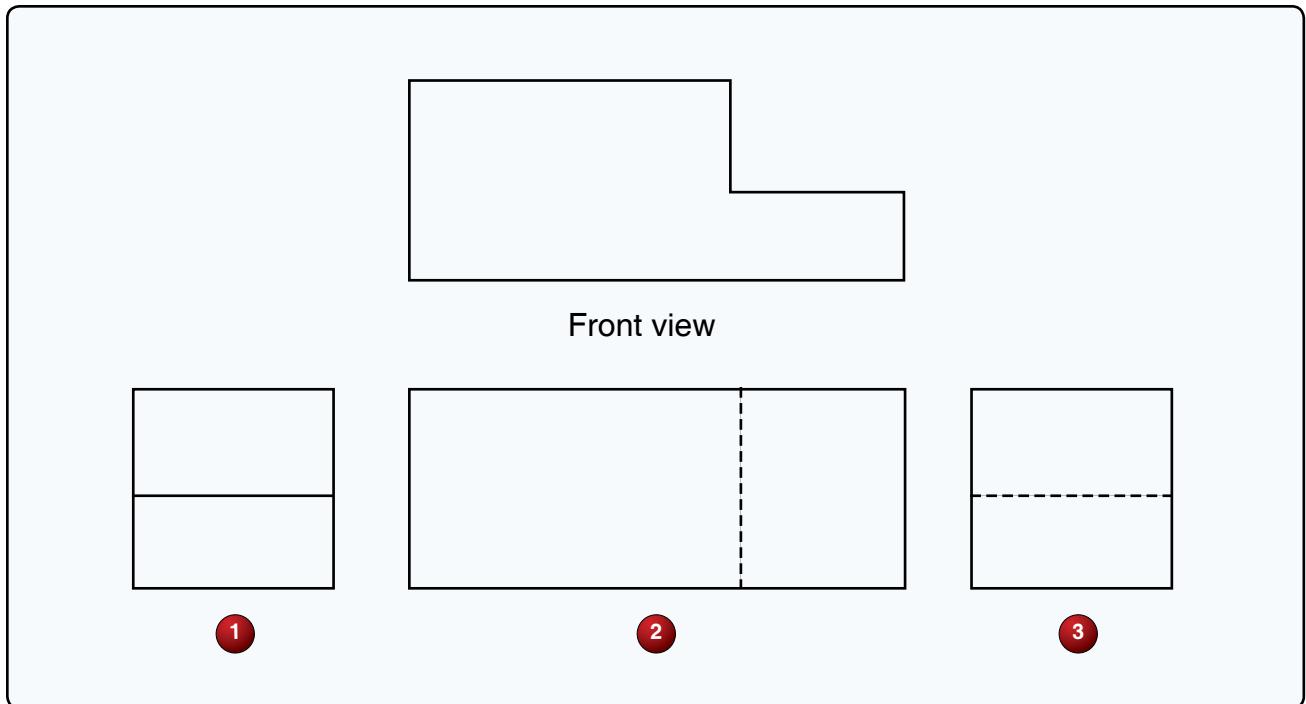


**Figure 29.** Object views.


## Appendix 1

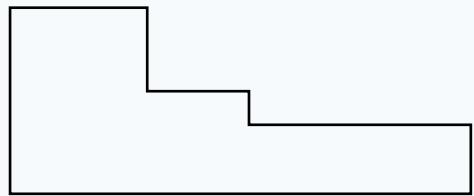


Front view

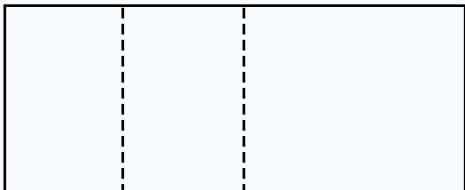

1



2

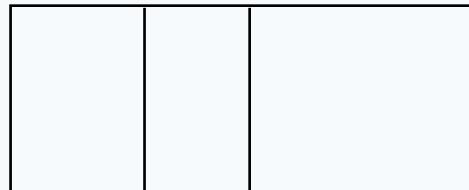

3

**Figure 30.** Object views.





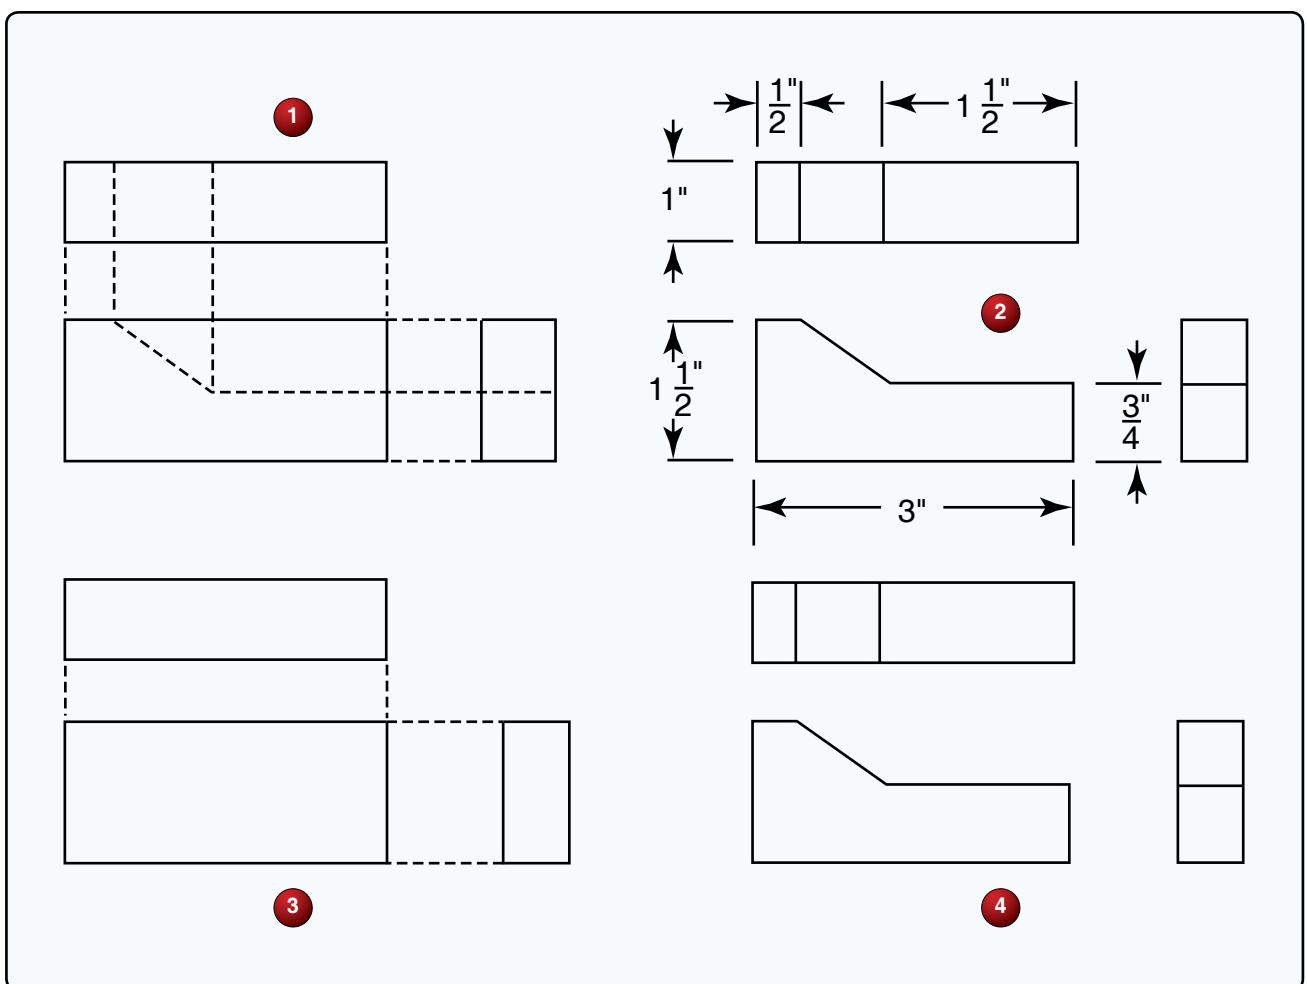


Figure 31. Sketches.


## Appendix 1

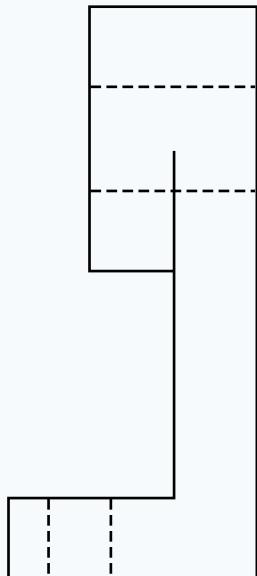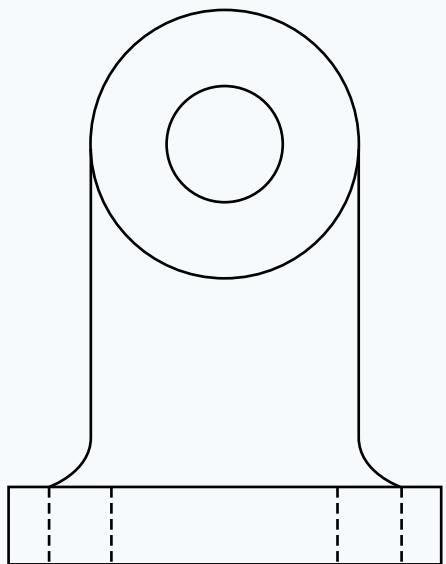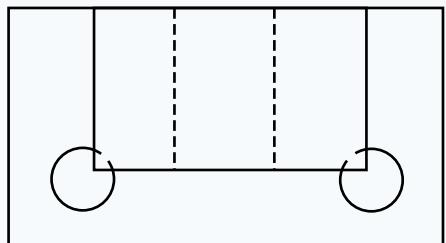


**Figure 32.** Sketches.

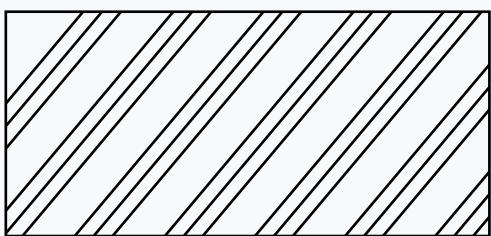

**1**

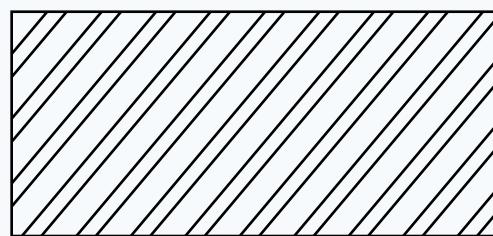

**2**

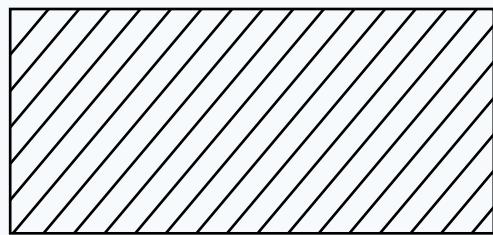

**3**

**Figure 33.** Material symbols.

## Appendix 1

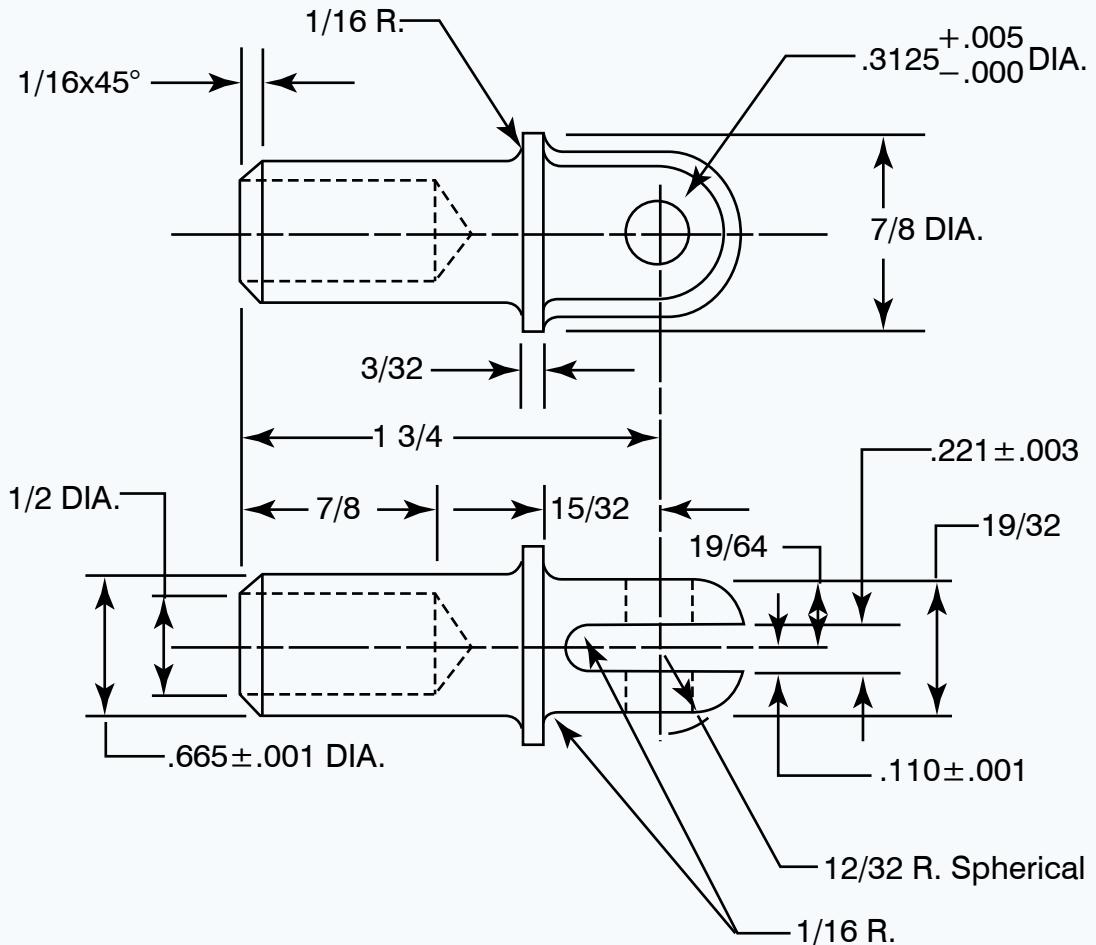


Figure 34. Aircraft drawing.


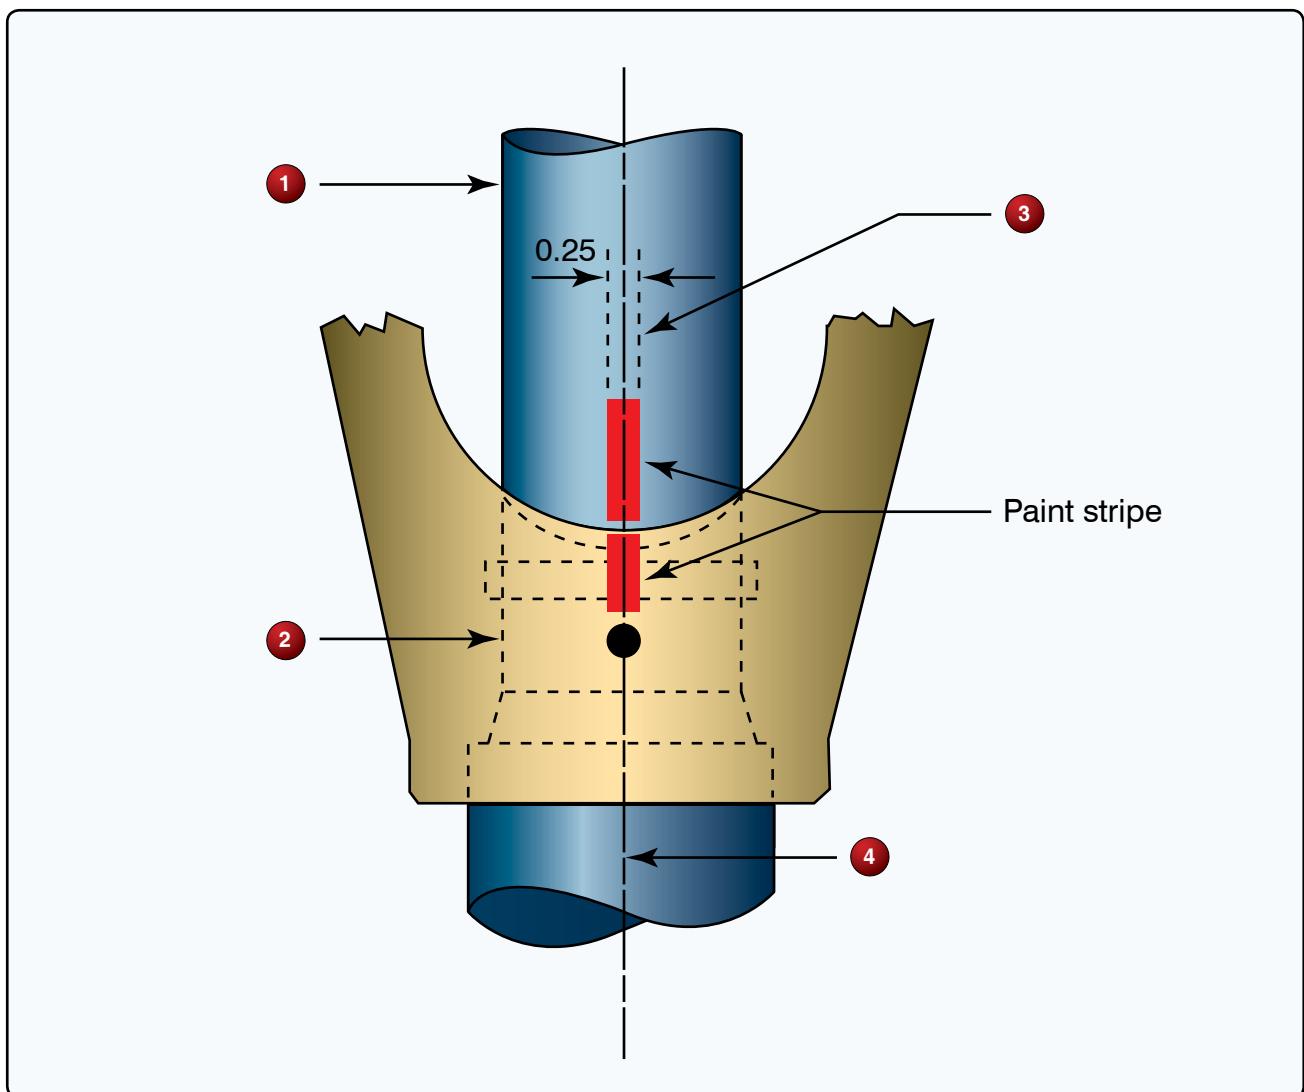


Figure 35. Aircraft drawing.

## Appendix 1

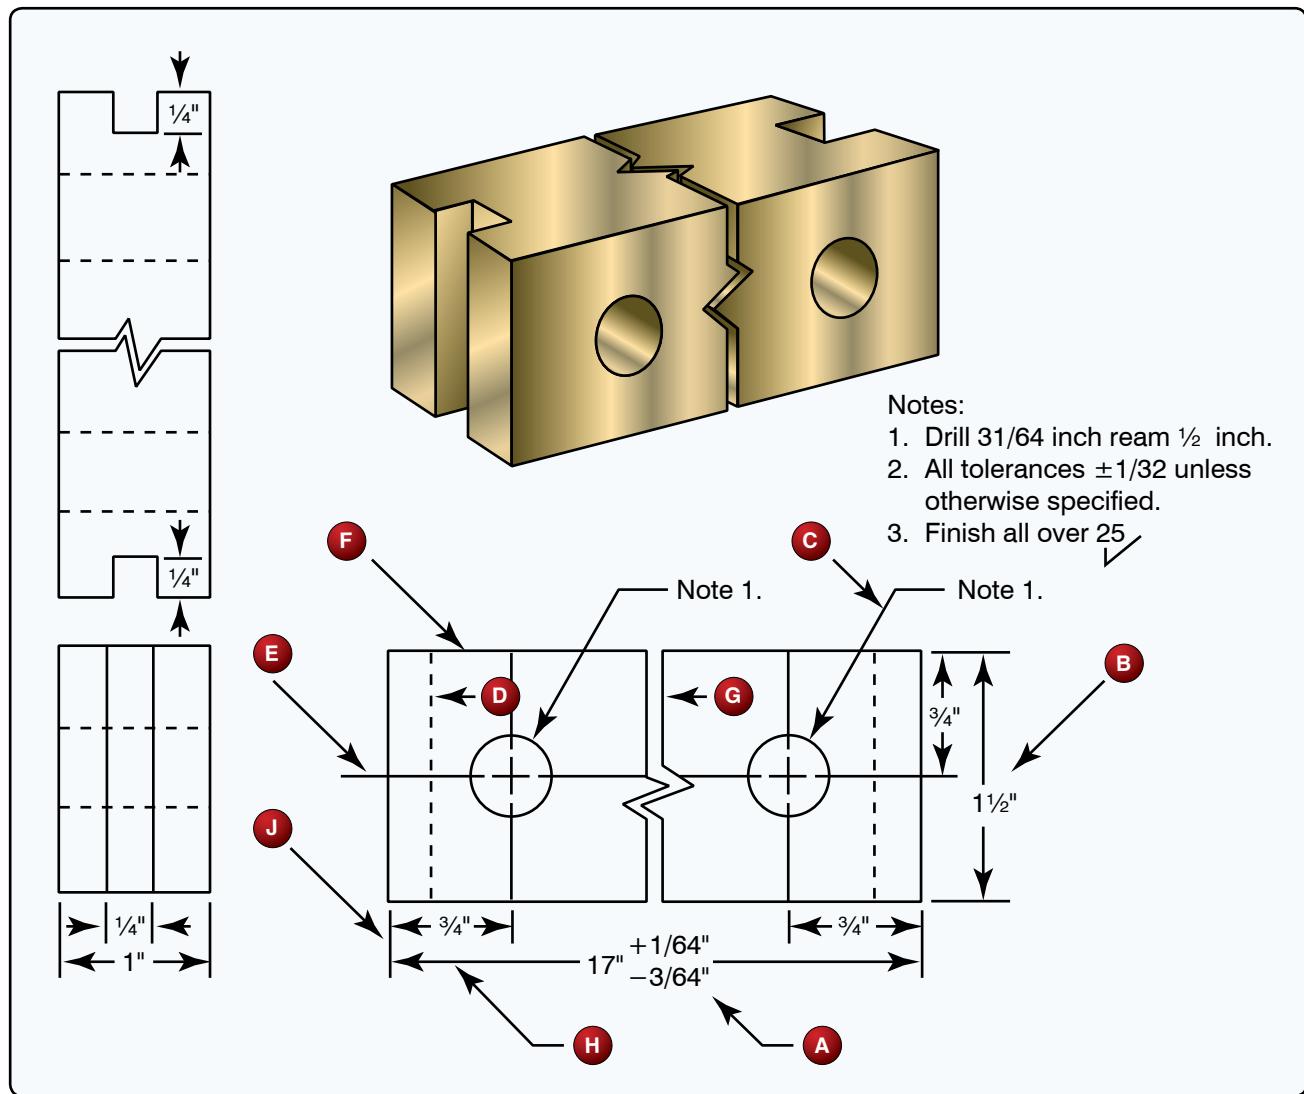

**Figure 36.** Aircraft drawing.


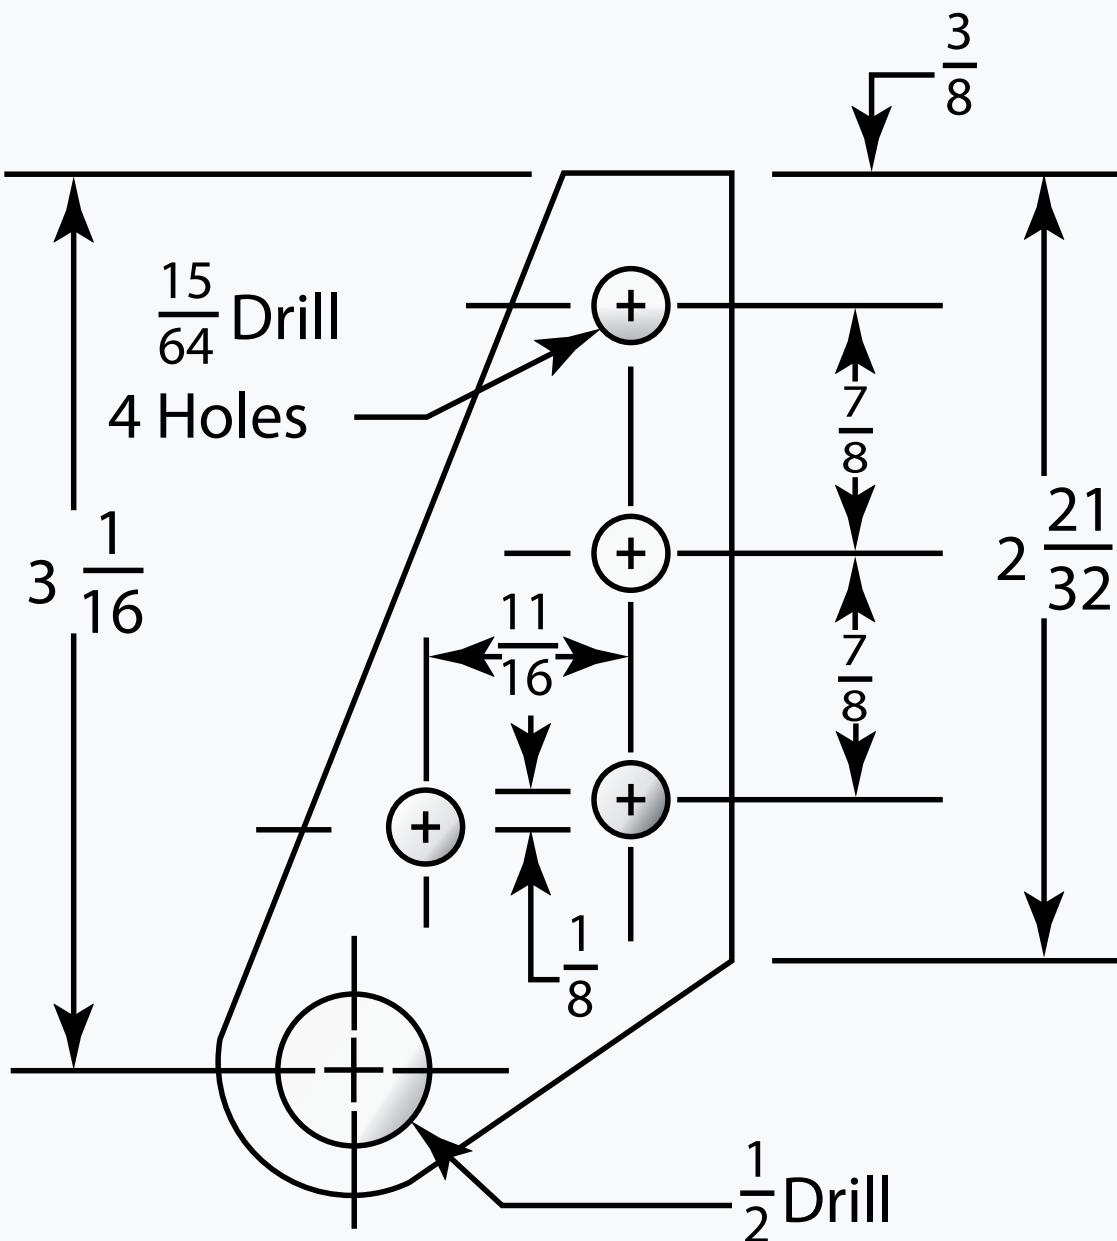


Figure 37. Aircraft drawing.

## Appendix 1

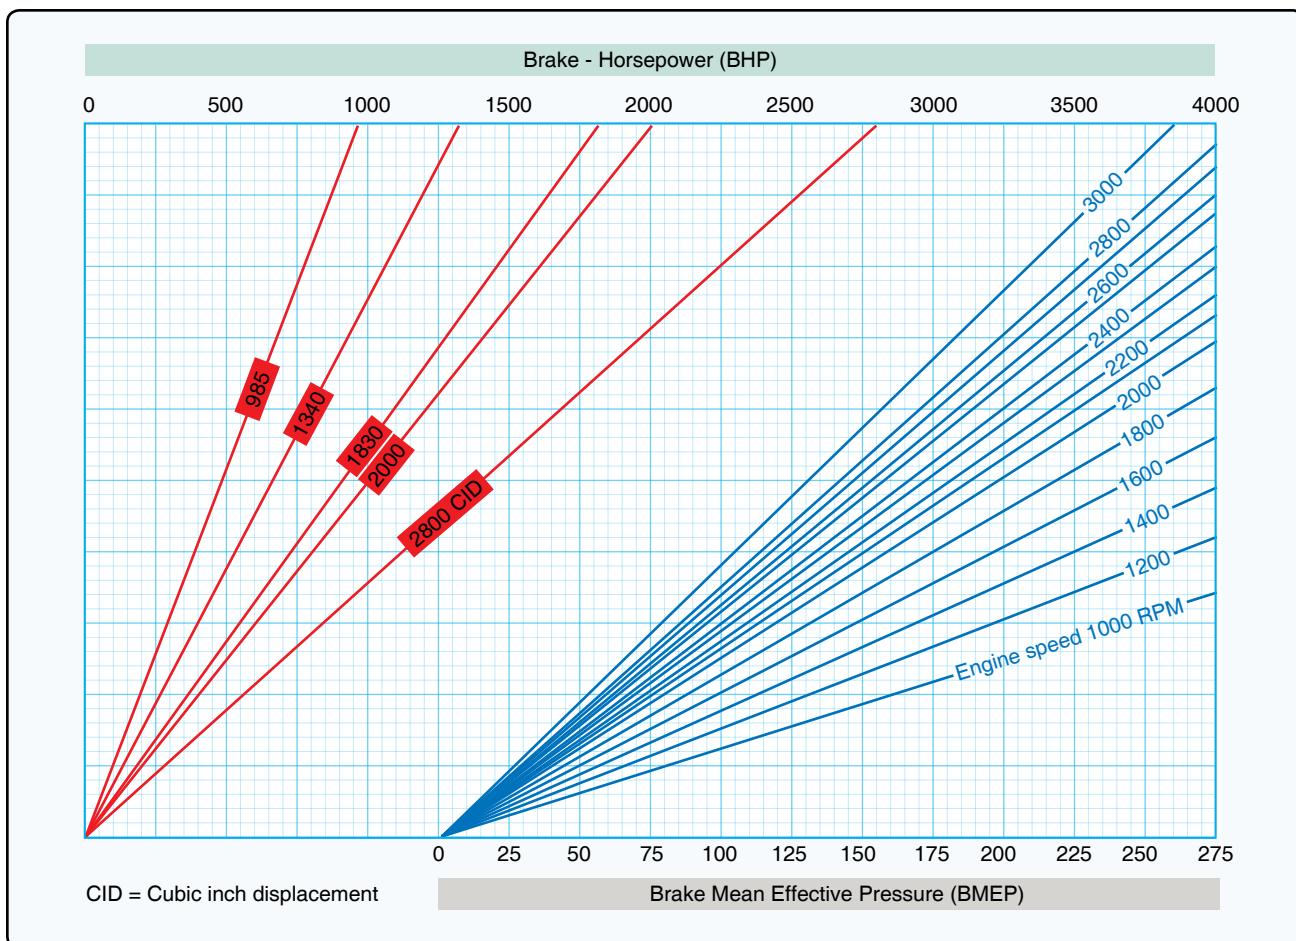

**Figure 38.** Performance chart.


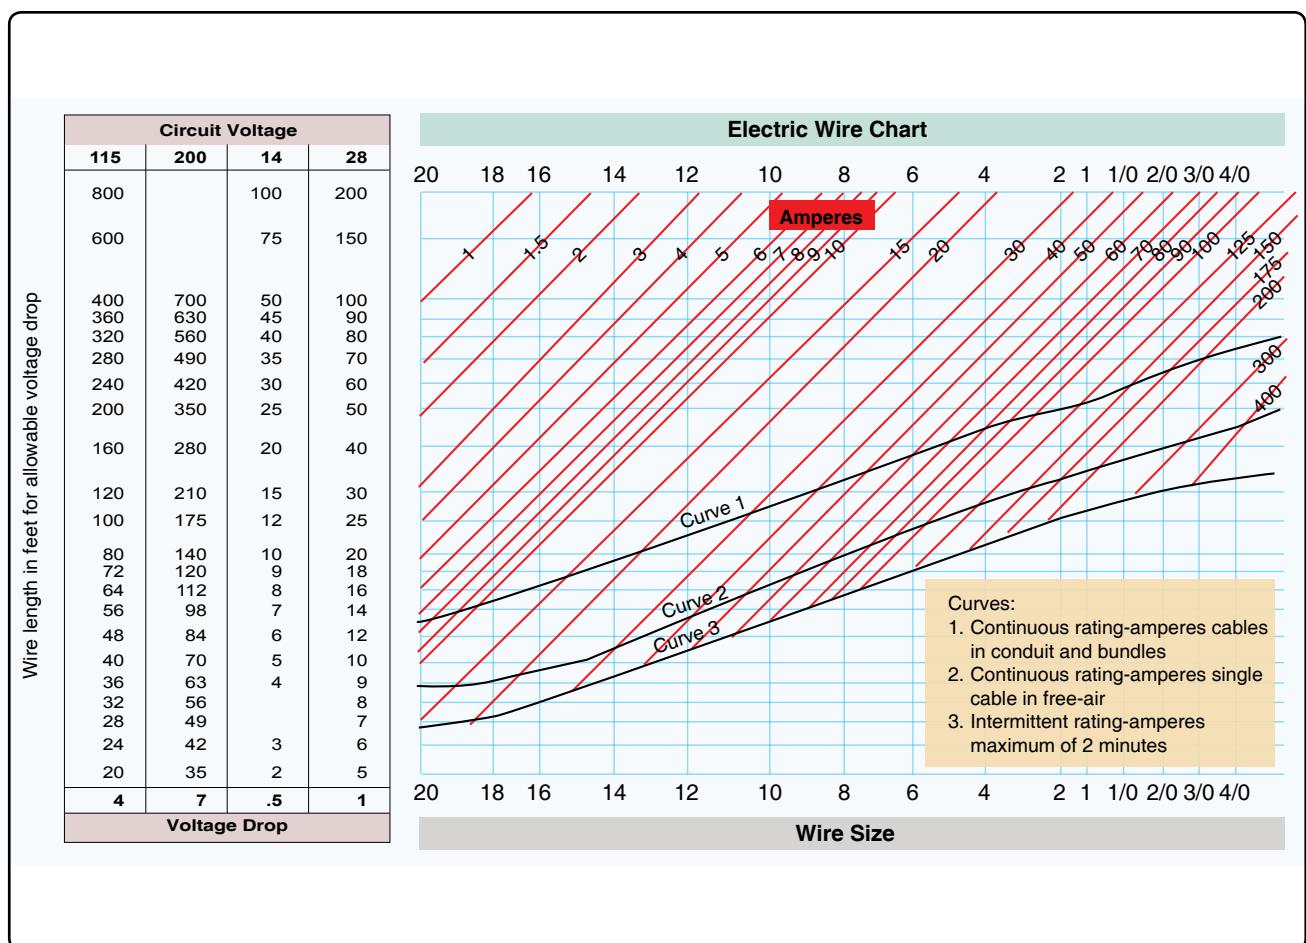


Figure 39. Electric wire chart.

## Appendix 1

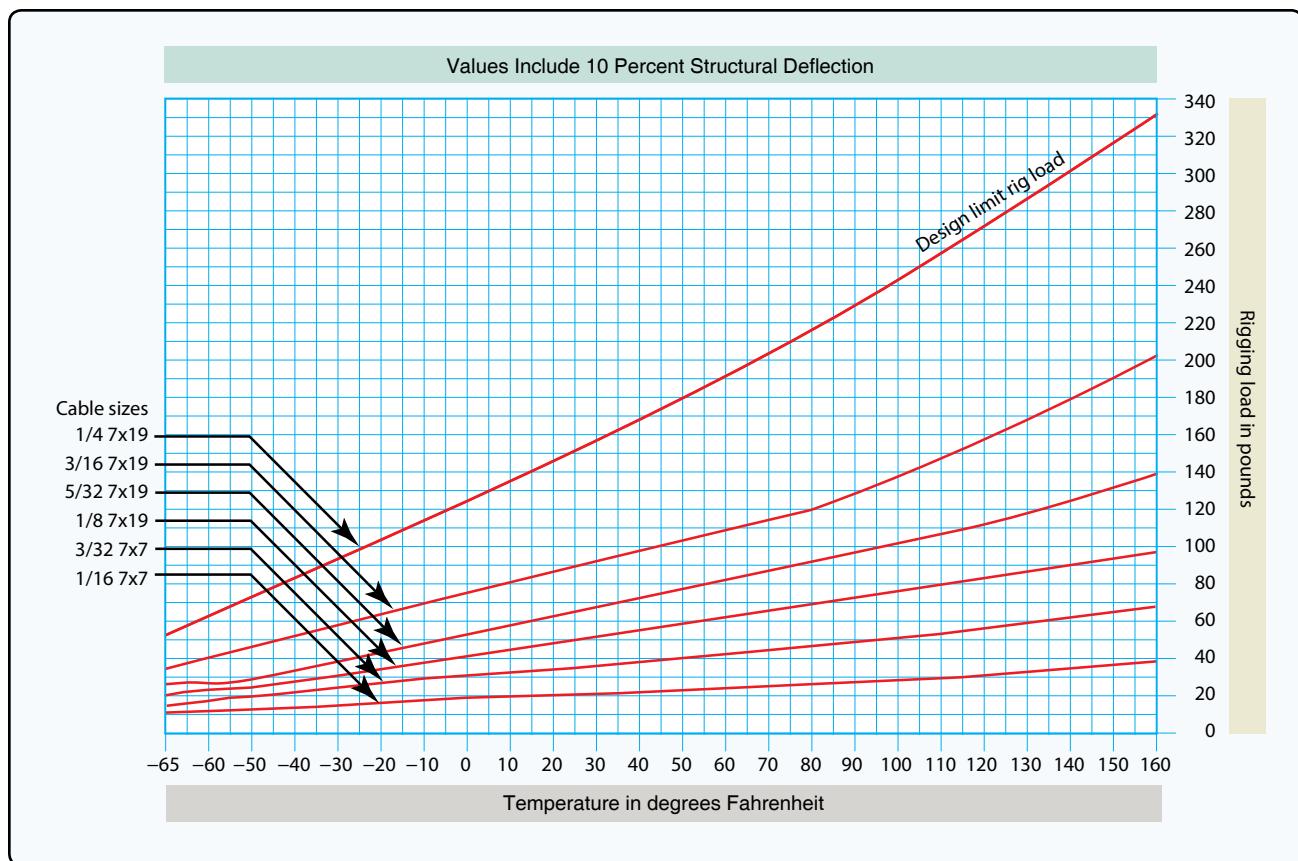

**Figure 40.** Cable tension chart.



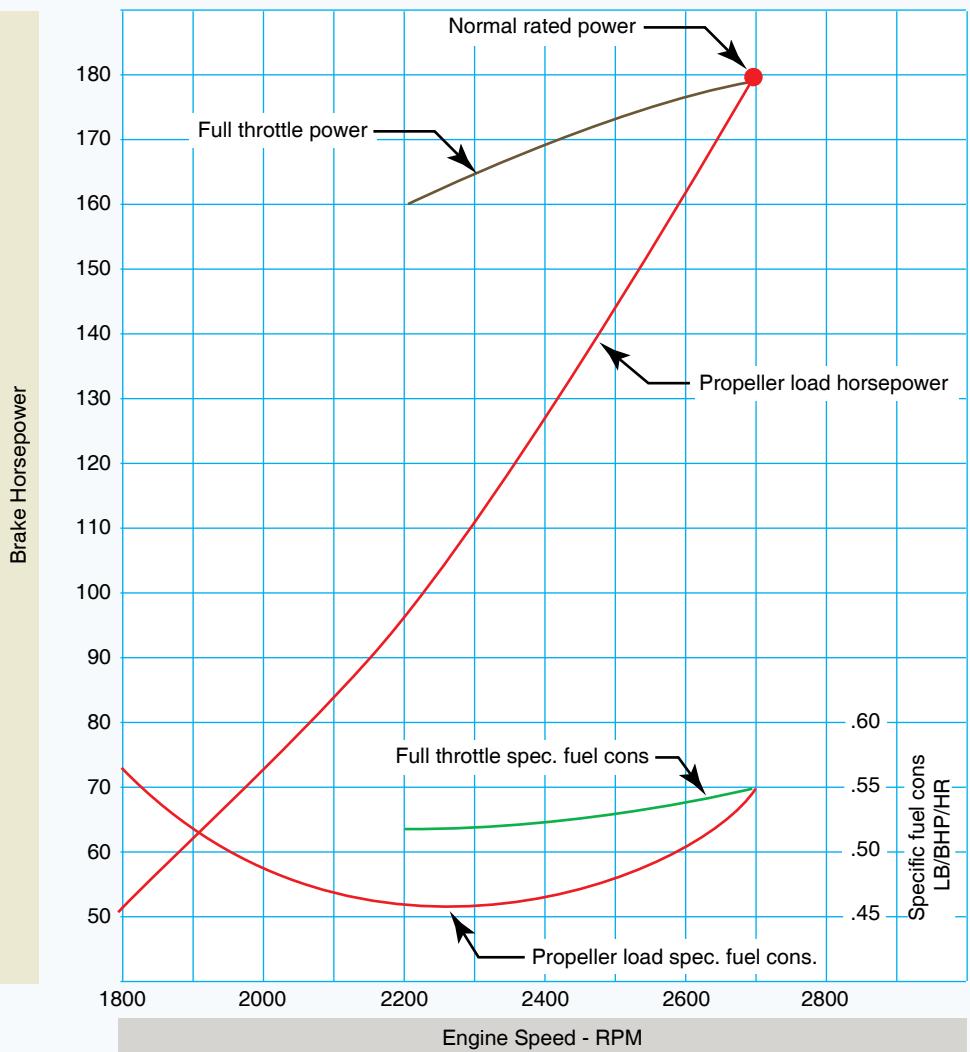


Figure 41. Performance chart.

## Appendix 1

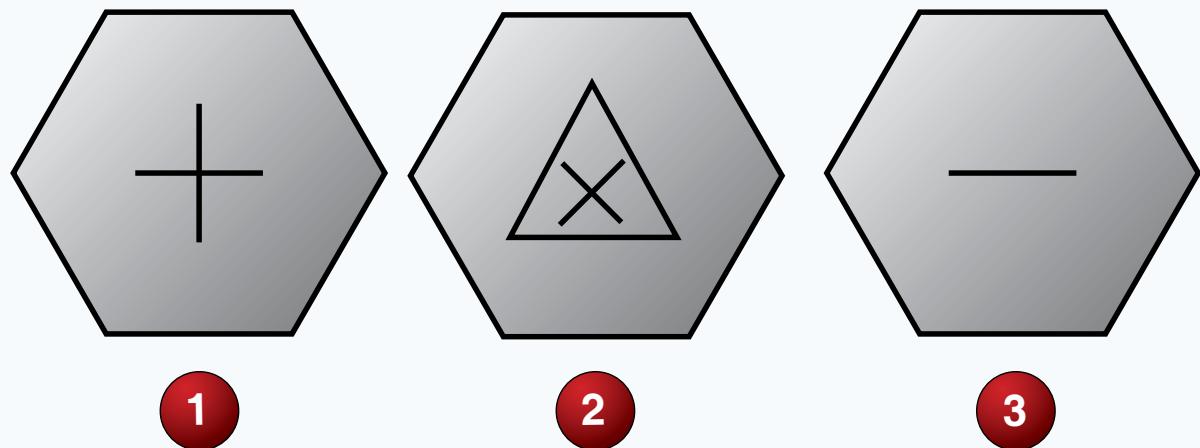


**Figure 42.** Aircraft hardware.

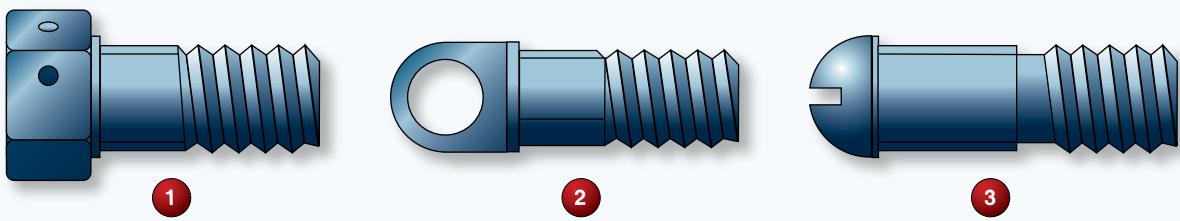


**Figure 43.** Aircraft hardware.


## Appendix 1

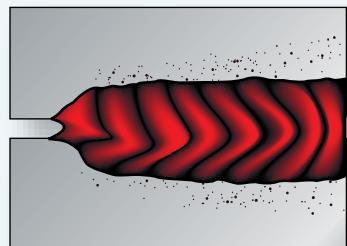


1

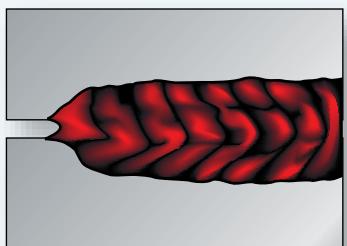

2

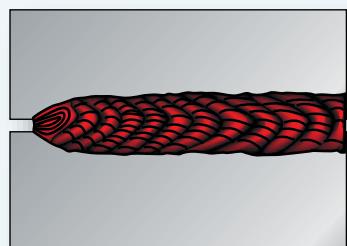


3

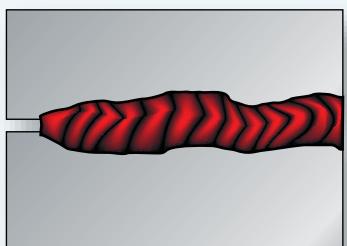


4

**Figure 44.** Welds.

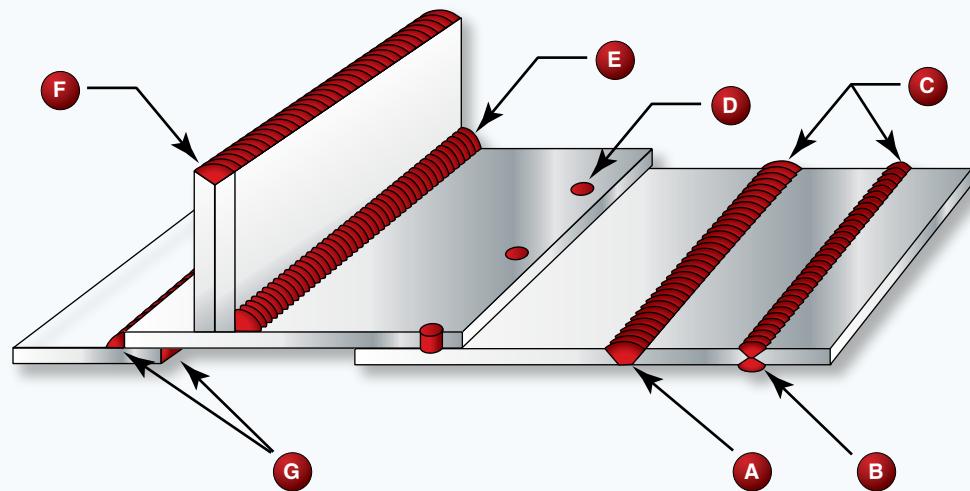


**Figure 45.** Welds.

## Appendix 1

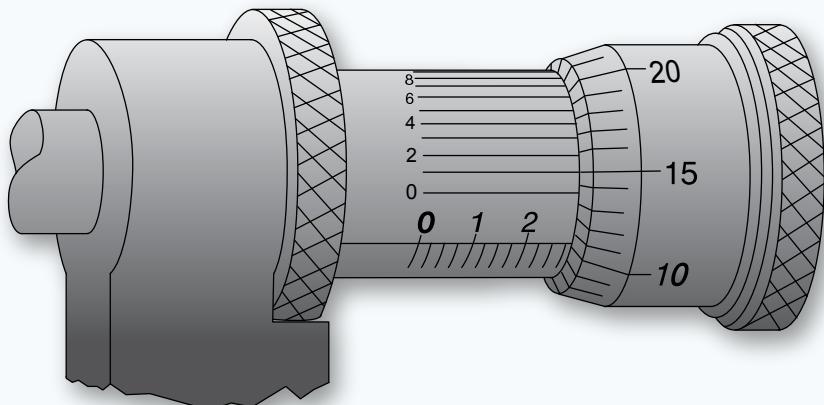


**Figure 46.** Precision measurement.

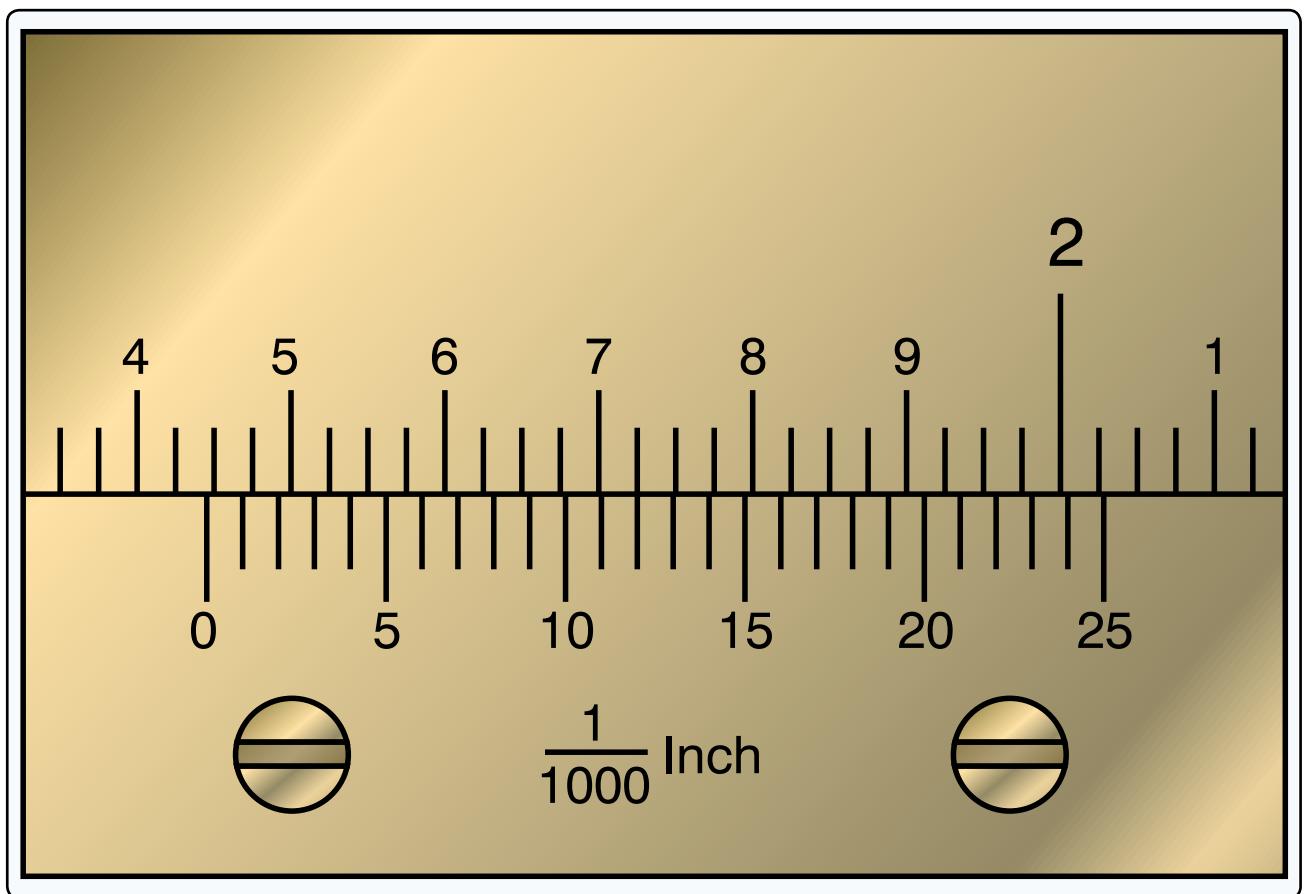


**Figure 47.** Precision measurement.

## Appendix 1

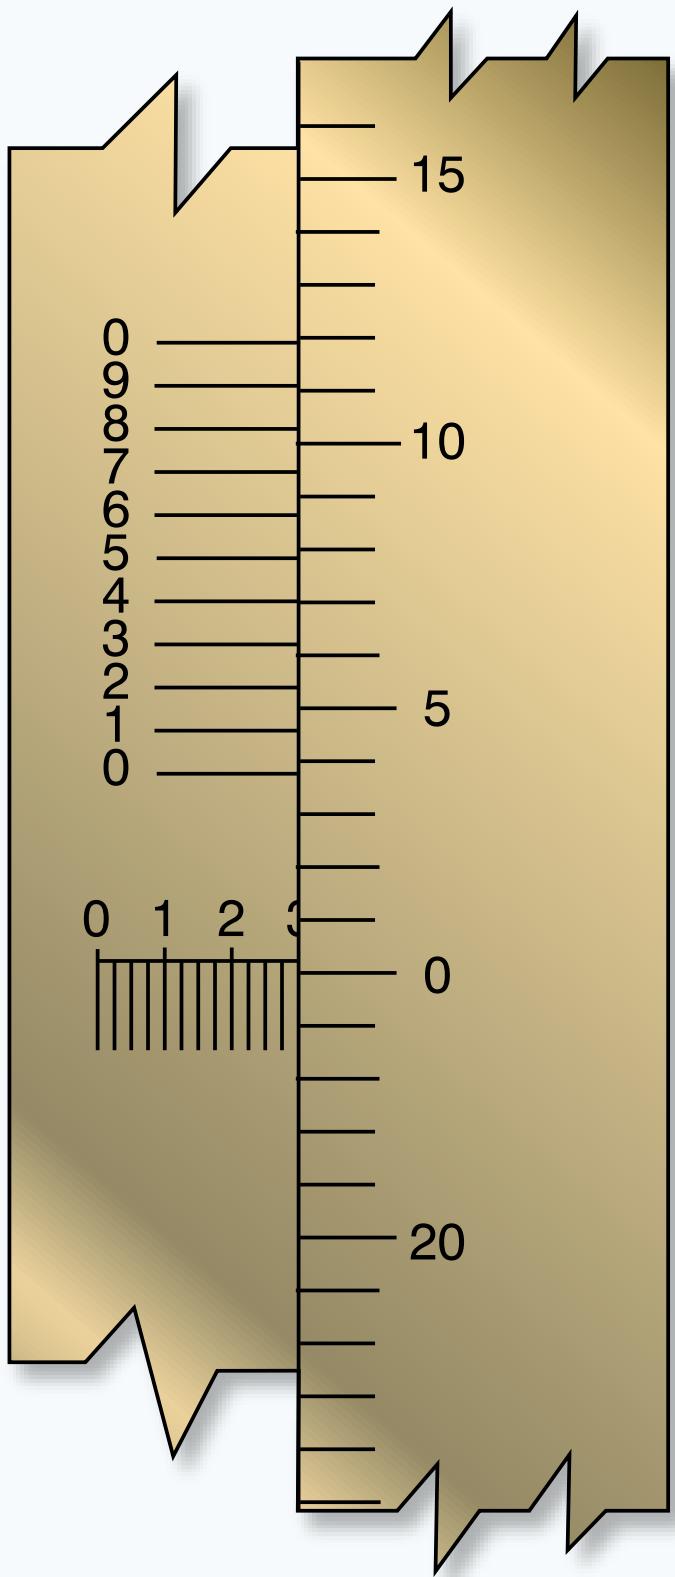


**Figure 48.** Precision measurement.

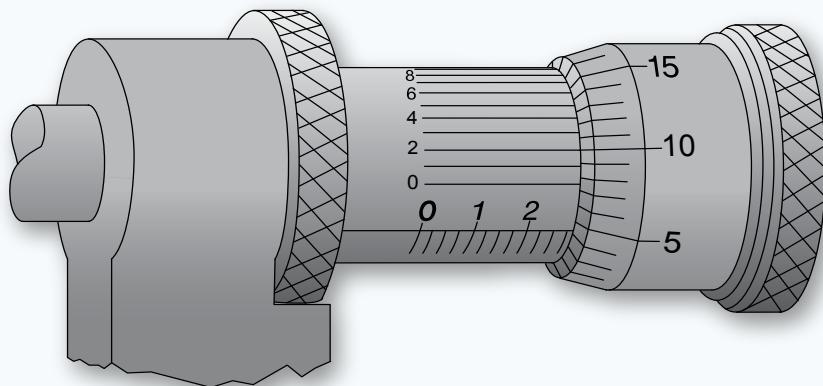


**Figure 49.** Precision measurement.

## Appendix 1

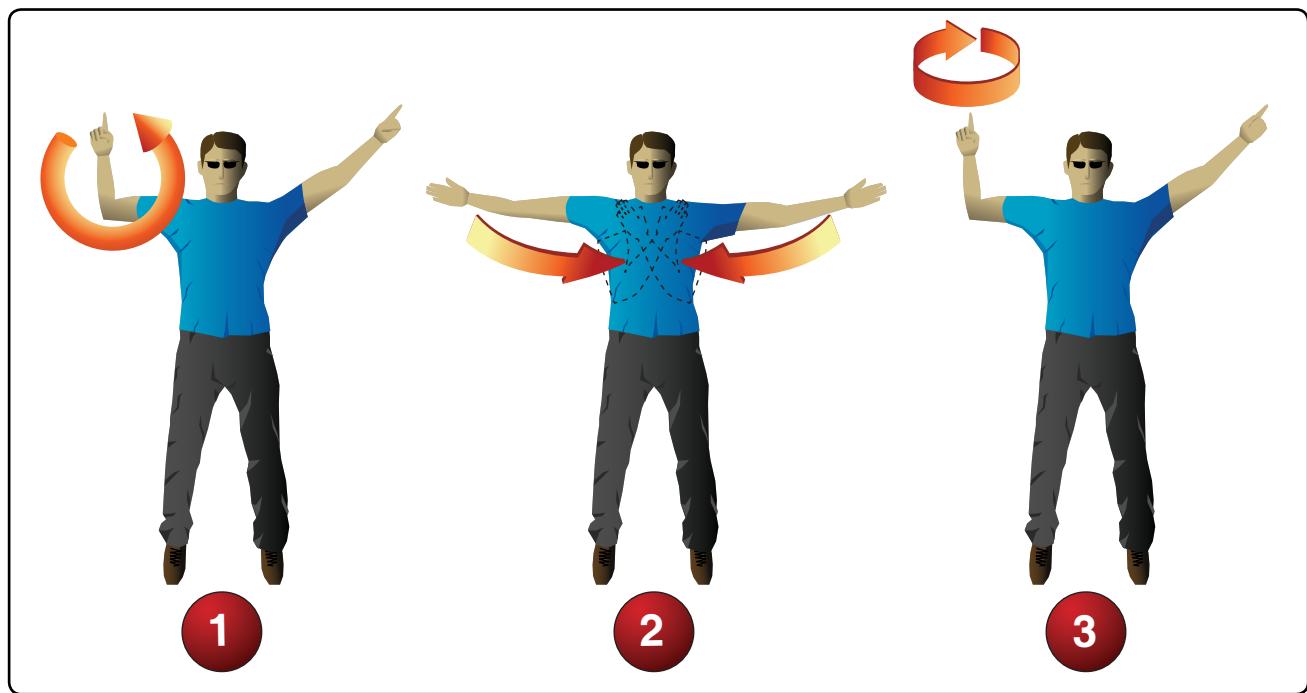

**Figure 50.** Marshalling signals.

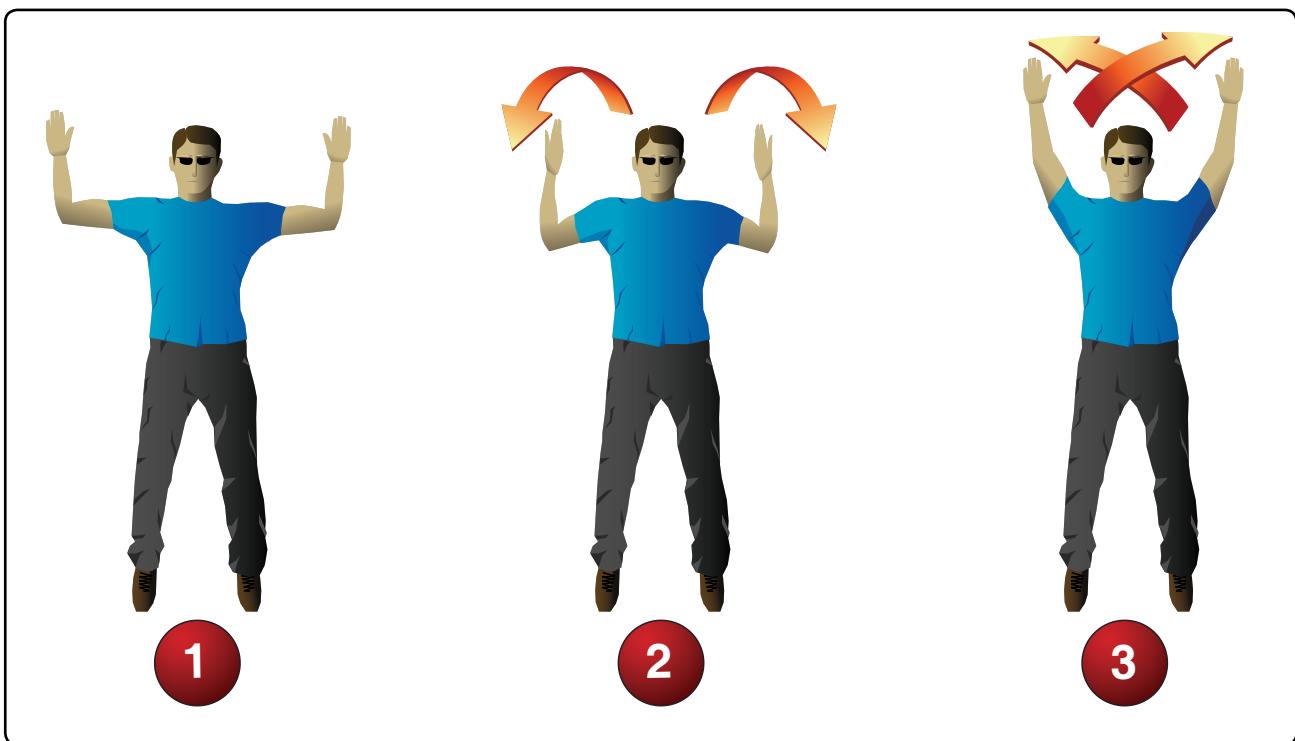

**Figure 51.** Marshalling signals.

## Appendix 1


$$(\sqrt{(-4)^0} + 6 + (\sqrt[4]{1296})(\sqrt{3})^2 =$$

**Figure 52.** Equation.


$$\frac{\sqrt[2]{31} + \sqrt[2]{43}}{(17)^2} =$$

**Figure 53.** Equation.

## Appendix 1

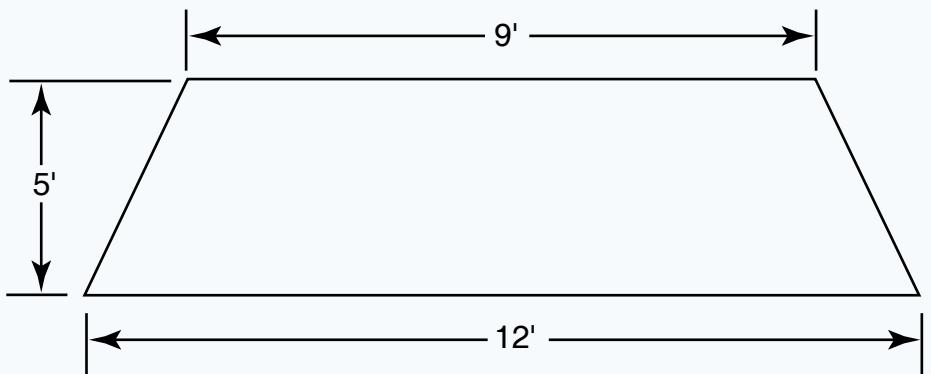


**Figure 54.** Trapezoid area.

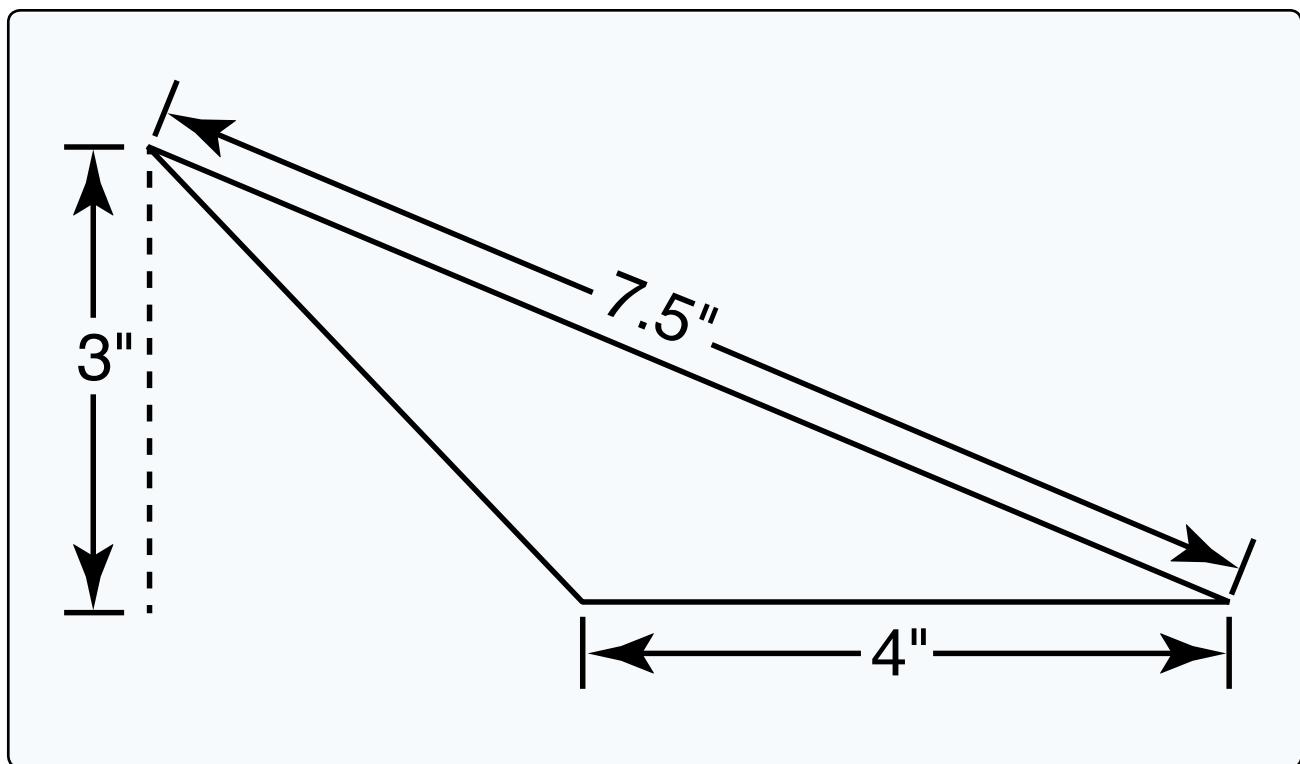


**Figure 55.** Triangle area.

## Appendix 1

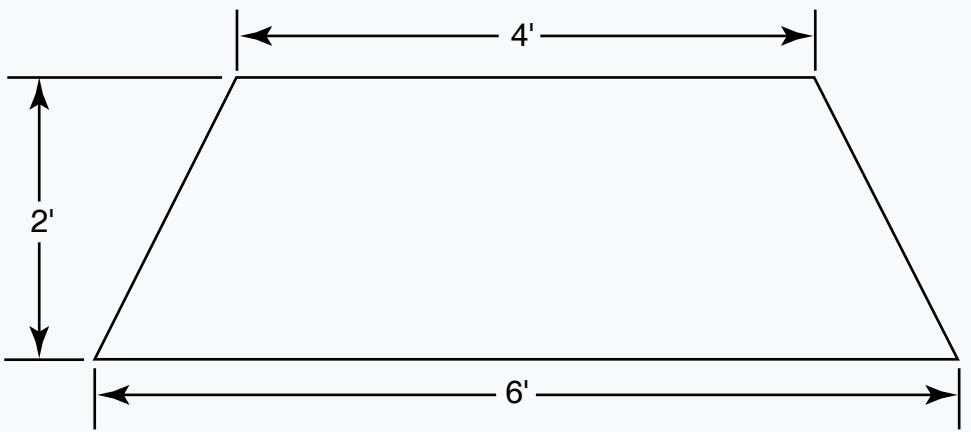

**Figure 56.** Trapezoid area.

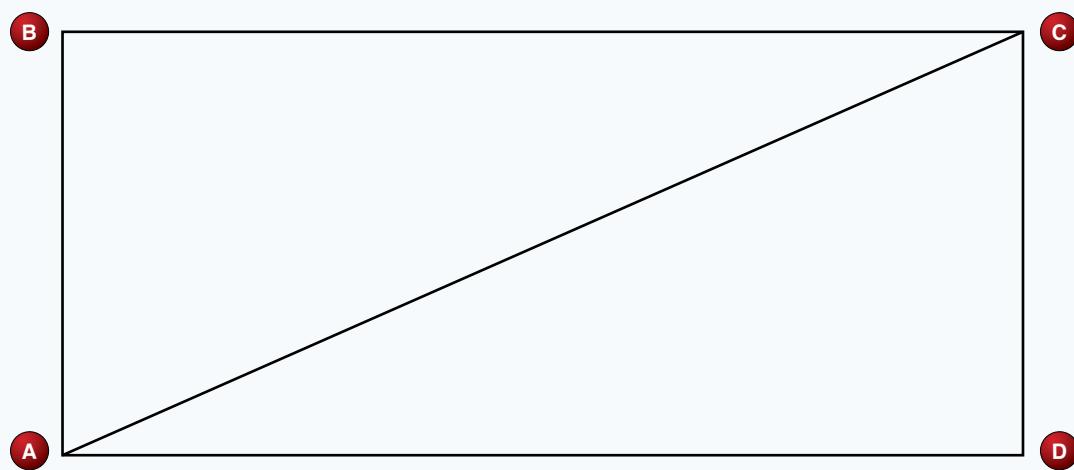

**Figure 57.** Triangle area.

## Appendix 1

$$\frac{(-35 + 25)(-7) + (\pi)(16^{-2})}{\sqrt{25}} =$$

**Figure 58.** Equation.

$$\begin{array}{r} \overline{-4)125} \\ \hline \overline{-6)-36} \end{array} =$$

**Figure 59.** Equation.

## Appendix 1

$$\frac{(-5+23)(-2)+(3^{-3})(\sqrt{64})}{-27 \div 9}$$

**Figure 60.** Equation.

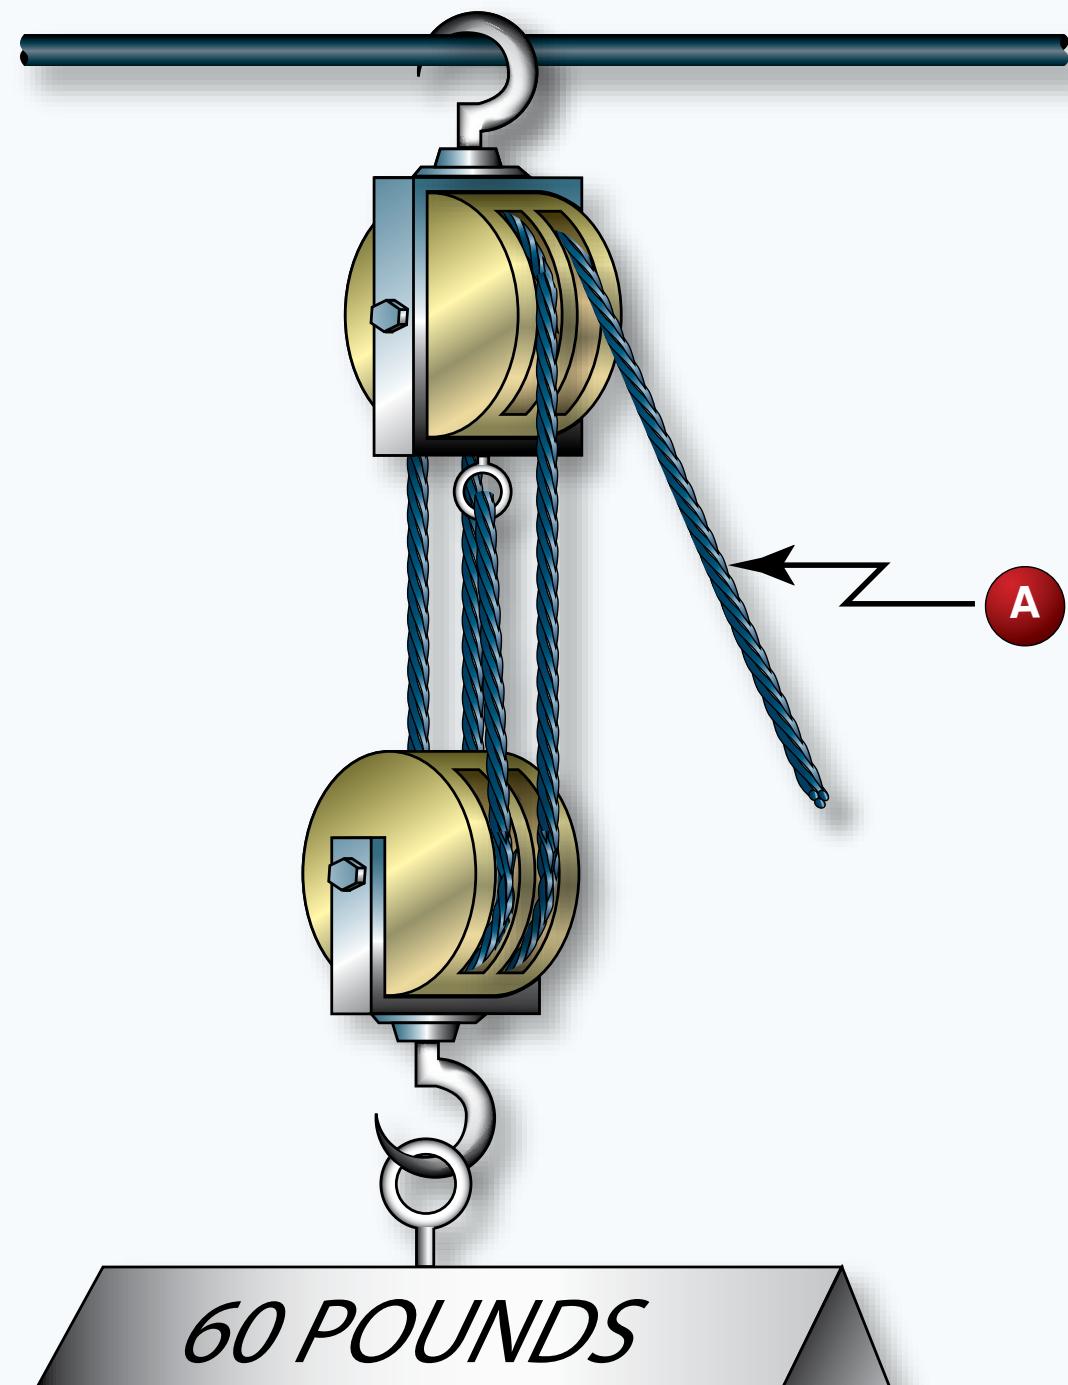


Figure 61. Physics.

## Appendix 1

				REV.	B		
				DASH NUMBERS SHOWN	DASH NUMBERS OPPOSITE	UNIT WT.	DWG. AREA
				All	N/A	FIRST	RELEASE
Unless otherwise noted							
Area 1	0	0	-200	0	-200		
REQ'd. PER ASSEM.							
B ADD-200							
A MAT'L THKNESS							
LET. CHANGE	BY	Date	Apr.	992-148-XXX	Speedwind aircraft engineering section last chance airport anytown OK 73125-1234		T4H
The use of this document shall be restricted to conveyance of information to customers of vendors only. Neither classified nor unclassified documents may be reproduced without the written consent of THE SPEEDWIND AIRCRAFT CORP.							
4	4	MS20470AD-4-4	Rivet				
8	8	NAS1097-3-4	Rivet				
4	4	NAS1473-3A	Domed Nutplate				
5	5	NAS1097-4-5	Rivet				
37	37	NAS1097-4-4	Rivet				
2	2	-103	Clip	040 sheet	2024-T3 CLAD AL.		
1		-102	Doubler	040 sheet	7075-0 AL.		
	1	-101	Doubler	040 sheet	2024-T3 CLAD AL.		
		Part number	NAME	stock size	MAT'L DESCRIPT	MAT'L SPEC.	Zone

Figure 62. Maintenance data - part 1 of 3.

**AREA 2****GENERAL NOTES - 100**

1. ALL BENDS +/- .5 deg.
2. All holes +/- .003.
3. Apply Alodine 1,000.
4. Prime with MIL-P-23377 or equivalent.
5. Trim S-1 C just aft of the clip at STA. 355.750 and forward of the front face of the STA. 370.25 frame and remove from the airplane.
6. Position the -101 doubler as shown. Install wet with NAS1097AD-4-4 and -4-5 rivets and a faying surface seal of PR 1,422. Pick up the rivet row that was in S-1 C and the aft rivets in sta. 370.25. Tie doubler into front frame with clips as shown using MS20470AD-4-4 rivets through the clips and the frame.
7. Install 4 NAS1473-3A nutplates with NAS1097-3-4 rivets through the skin and doubler to retain the antenna.
8. Strip paint and primer from under the antenna footprint.
9. Treat skin with Alodine 1,000.
10. Install antenna and apply weather seal fillet around antenna base.

**AREA 3****GENERAL NOTES - 200**

Note: P.S. = Process Specification  
IAW = in accordance with

1. ALL BENDS IAW P.S. 1,000.
2. All holes IAW P.S. 1,015.
3. Heat treat -102 to -T6 IAW P.S. 5,602.
4. Alodine IAW P.S. 10,000.
5. Prime IAW P.S. 10,125.
6. Trim S-1 C just aft of the clip at STA. 355.750 and forward of the front face of the STA. 370.25 frame and remove from airplane.
7. Position the -102 doubler as shown. Install wet with NAS1097AD-4-4 and -4-5 rivets, and a faying surface seal IAW P.S. 41,255. Pick up the rivet row that was S-1 C and the aft rivets in STA. 370.25. Add two edge rows as shown. Tie doubler into front frame with clips as shown using MS20470AD-4-4 rivets through the clips and the frame.
8. Install 4 NAS1473-3A nutplates with NAS 1097-3-4 rivets through the skin and doubler to retain the antenna.
9. Strip paint and primer from under the antenna footprint.
10. Treat skin IAW P.S. 10,000.
11. Install antenna and apply weather seal fillet around antenna base.

**Figure 62A.** Maintenance data - part 2 of 3.

## Appendix 1

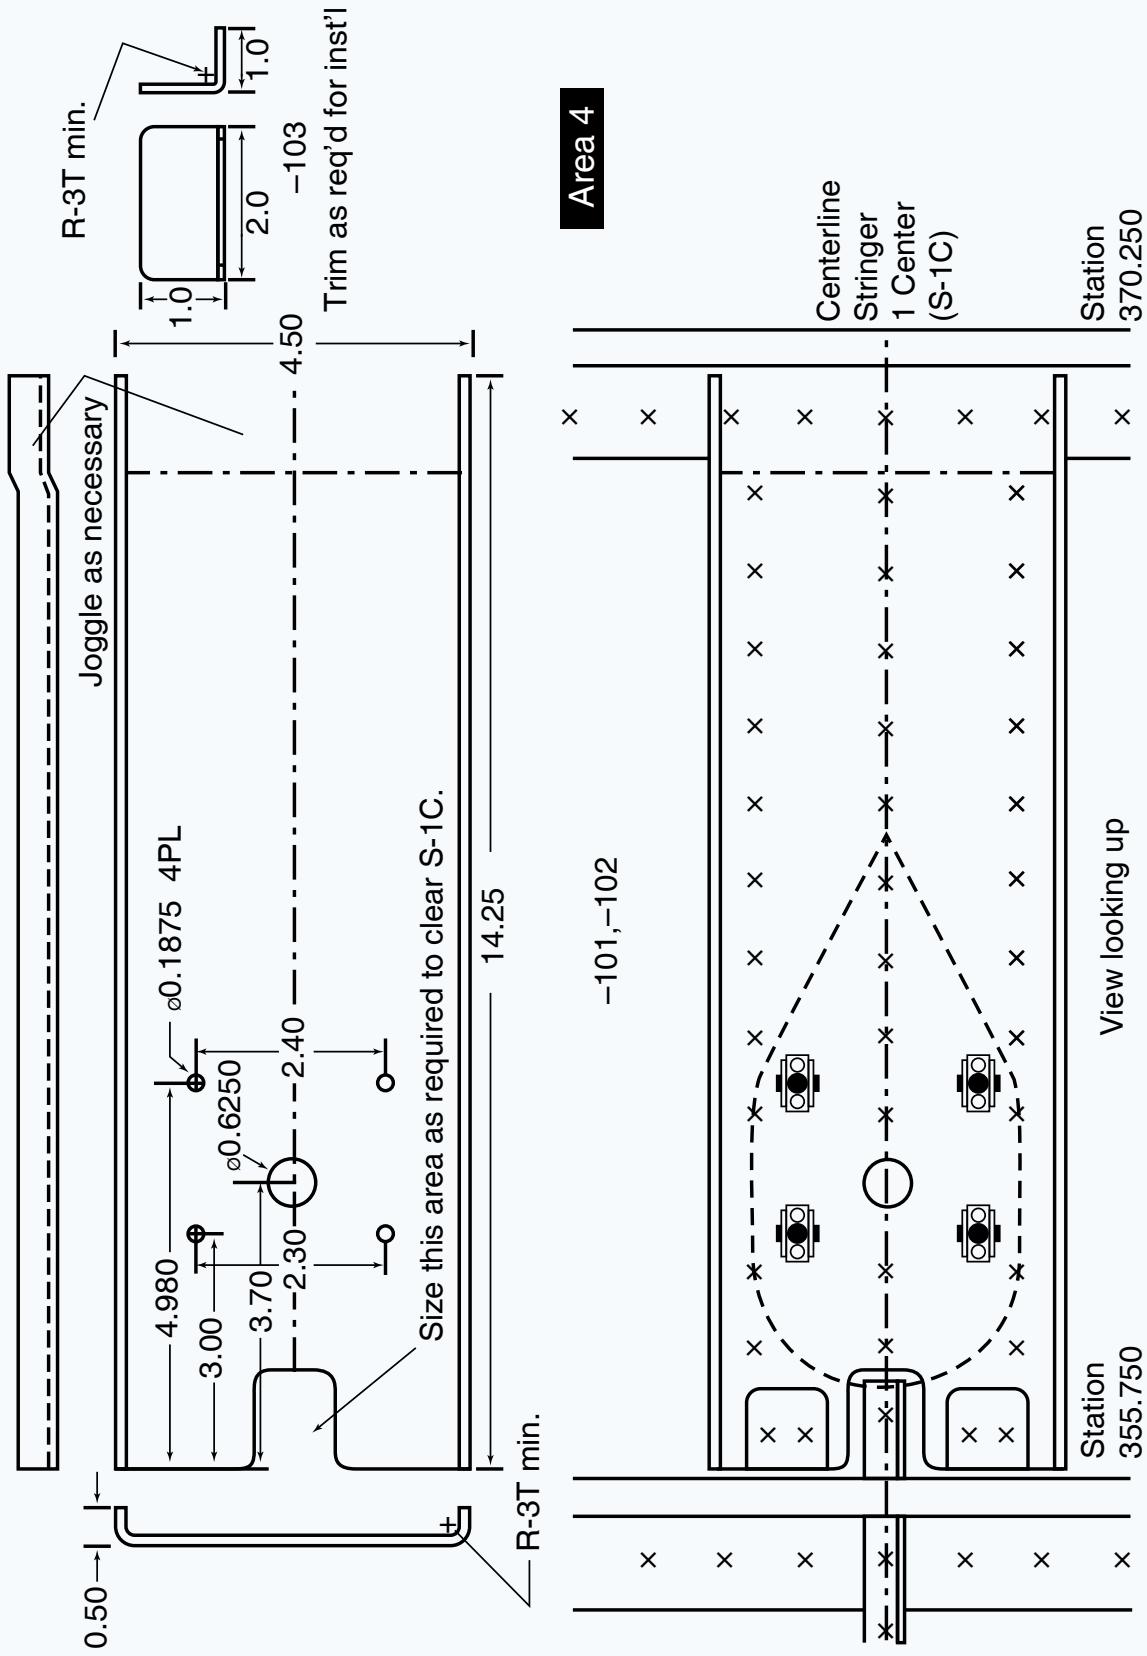


Figure 62B. Maintenance data - part 3 of 3.

The following is the compliance portion of an Airworthiness Directive.

"Compliance required as indicated, unless already accomplished:

- I. Aircraft with less than 500 hours total time in service: Inspect in accordance with instructions below at 500 hours total time, or within the next 50 hours time in service after the effective date of this AD, and repeat after each subsequent 200 hours in service.
- II. Aircraft with 500 hours through 1,000 hours total time in service: Inspect in accordance with instructions below within the next 50 hours time in service after the effective date of this AD, and repeat after each subsequent 200 hours in service.
- III. Aircraft with more than 1,000 hours time in service: Inspect in accordance with instructions below within the next 25 hours time in service after the effective date of this AD, and repeat after each subsequent 200 hours in service."

**Figure 63.** Airworthiness directive excerpt.

## Appendix 1

$$R_t = E^2/P$$

**Figure 64.** Resistance total.

$$1. \ 3.47 \times 10^4 = 34,700.$$

$$2. \ 2(4^{10}) = 2,097,152.$$

**Figure 65.** Scientific notation.

## Appendix 1

$$-4 + 6 + 10^3 (\sqrt{1296}) =$$

**Figure 66.** Equation.

$$\frac{\sqrt{31} + \sqrt{43}}{(17)^2} =$$

**Figure 67.** Equation.

1.  $(4.631)^5$
2.  $4.631 \times 10^5$
3.  $4.631 \times 10^{-5}$

**Figure 68.** Alternative answer.

$$(\sqrt{100} + \sqrt{36} - \sqrt{16}) =$$

**Figure 69.** Equation.

## Appendix 1

1.  $(\sqrt{31}) + (\sqrt{43}) \div 17^2$
2.  $(\sqrt{31}) + \sqrt{43}) \div 17^2$
3.  $(\sqrt{31}) + (\sqrt{43}) - 17^2$


**Figure 70.** Alternative answer.

$$V = \frac{1}{6}\pi D^3$$


**Figure 71.** Volume of a sphere.

## APPENDIX 2

# Aviation Mechanic Powerplant

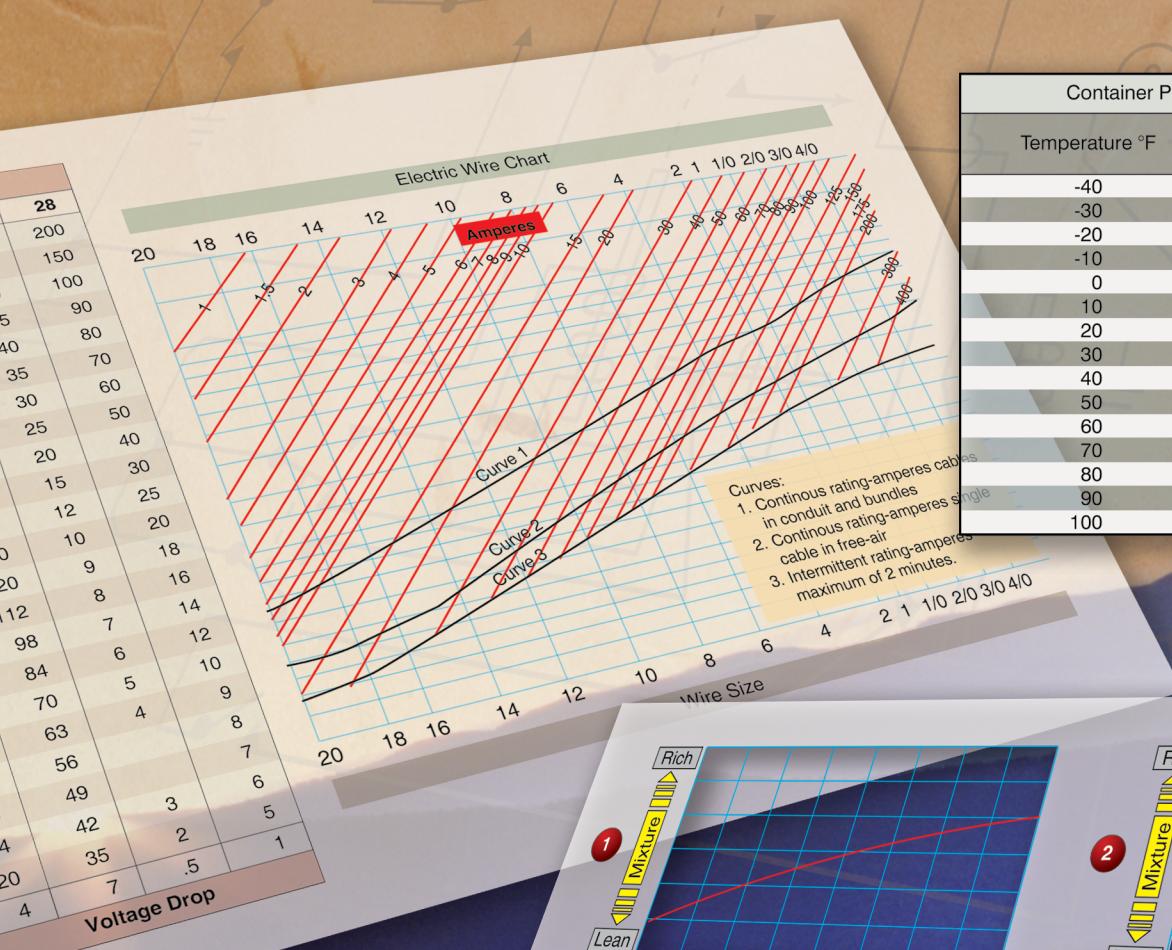

Temperature °F	Container Pressure Versus Temperature	
	Minimum	Maximum
-40	60	145
-30	83	165
-20	105	188
-10	125	210
0	145	230
10	167	252
20	188	275
30	209	295
40	230	317
50	255	342
60	284	370
70	319	405
80	356	443
90	395	483
100	438	523

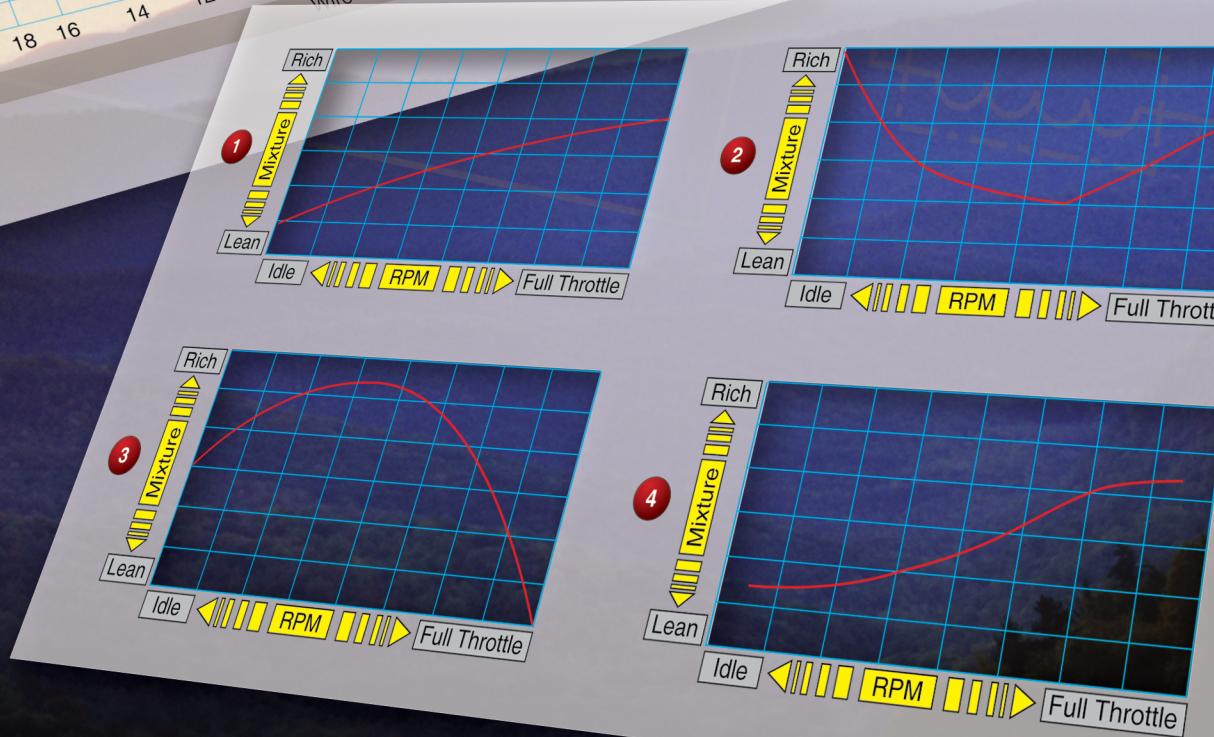

This is the compliance portion of an FAA Airworthiness Directive.

Compliance required as indicated:


- (A) For model O-690 series engines, serial Nos. 101-40 through 5264-40 and IO-690 series engines, serial Nos. 101-48 through 423-48, compliance with (C) required within 25 hours' time in service after the effective date of this AD and every 100 hours' time in service thereafter.
- (B) For model O-690 series engines, serial Nos. 5265-40 through 6129-40 and IO-690 series engines, serial Nos. 424-48 through 551-48, compliances with (C) required as follows.
  - (1) Within 25 hours' time in service after the effective date of this AD and every 100 hours' time in service thereafter for engines with more than 275 hours' time in service on the effective date of this AD.
  - (2) Prior to the accumulation of 300 hours total time in service and every 100 hours' time in service thereafter for engines with 275 hours or less time in service on the effective date of this AD.
- (C) Inspect the oil pump drive shaft (P/N 67512) on applicable engines in accordance with instructions contained in Connin Service Bulletin No. 295. Any shafts which are found to be damaged shall be replaced before further flight. These inspections shall be continued until Connin P/N 67512 (redesigned) or P/N 74641 oil pump drive shaft is installed at which time the inspections may be discontinued.

**Figure 1.** Airworthiness directive excerpt.

## Appendix 2

Container Pressure Versus Temperature		
Temperature °F	Container Pressure (PSIG)	
	Minimum	Maximum
-40	60	145
-30	83	165
-20	105	188
-10	125	210
0	145	230
10	167	252
20	188	275
30	209	295
40	230	317
50	255	342
60	284	370
70	319	405
80	356	443
90	395	483
100	438	523

**Figure 2.** Fire extinguisher pressure chart.

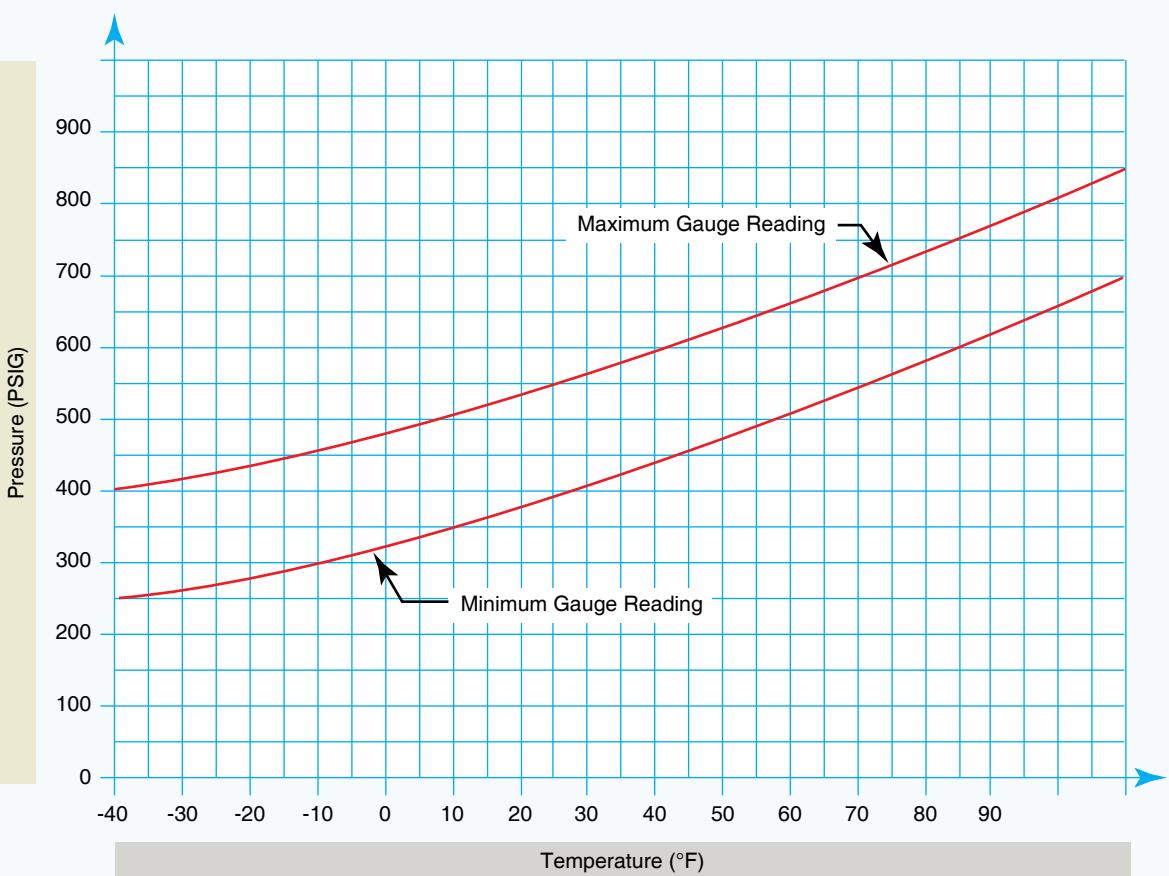

**Figure 3.** Fire extinguisher pressure chart.

## Appendix 2

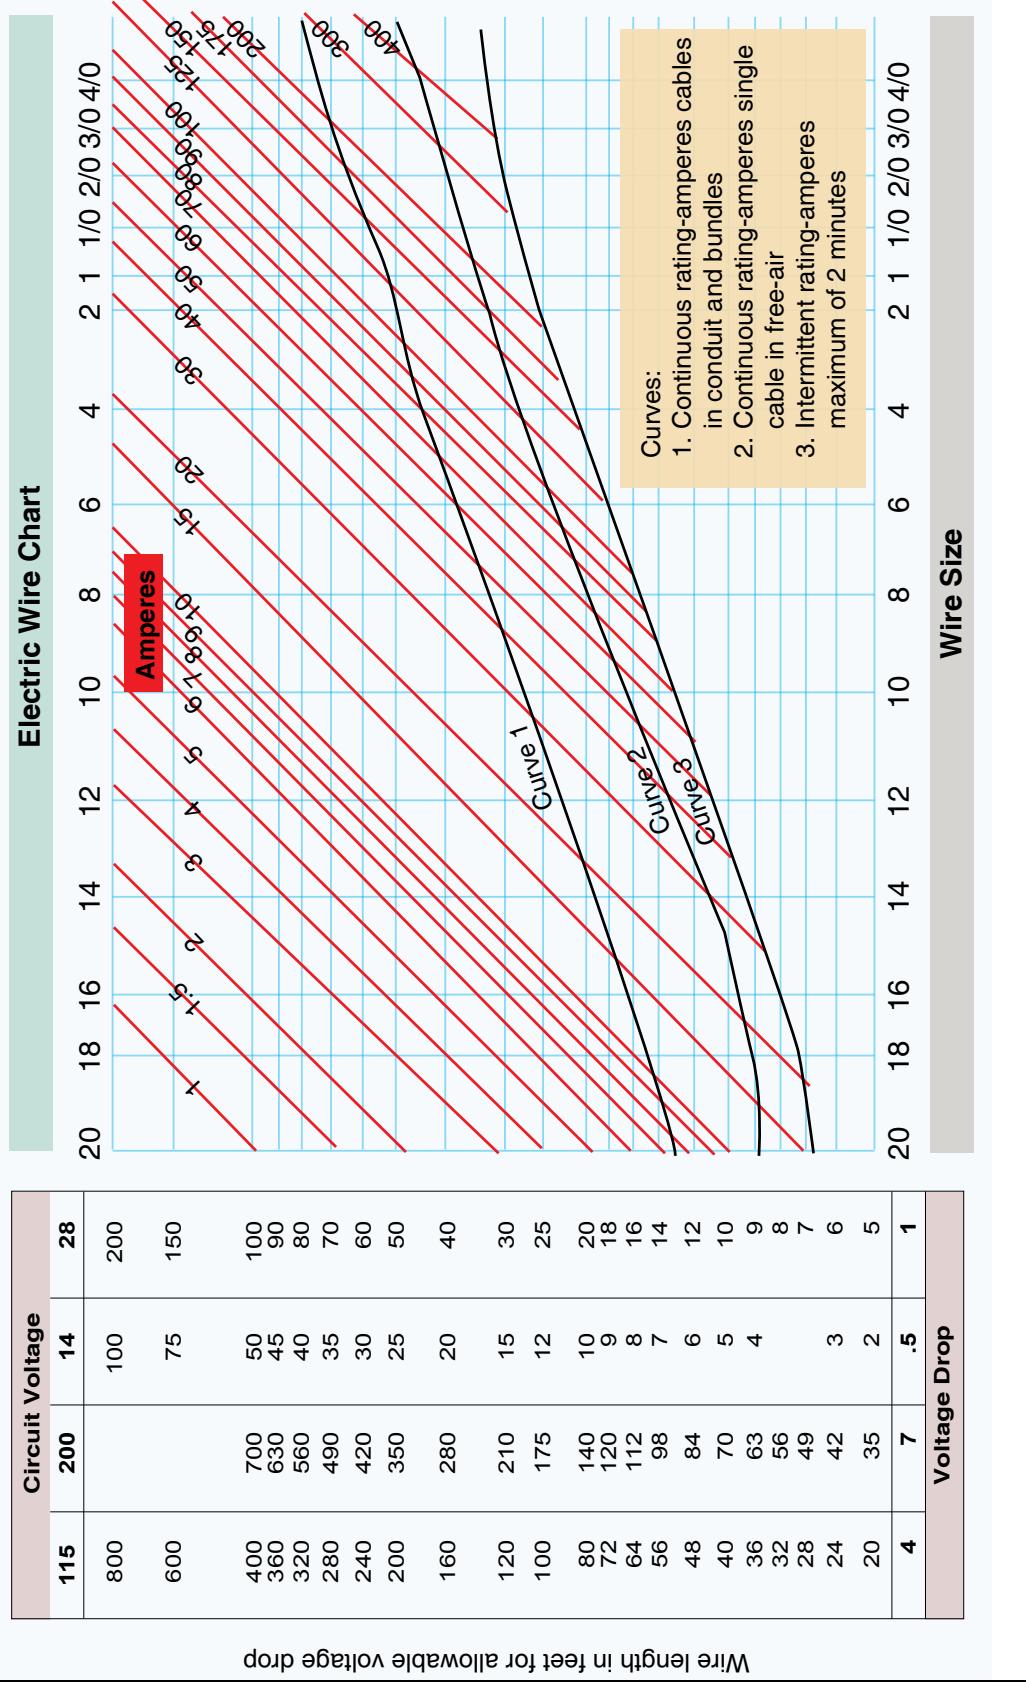


Figure 4. Electric wire chart.


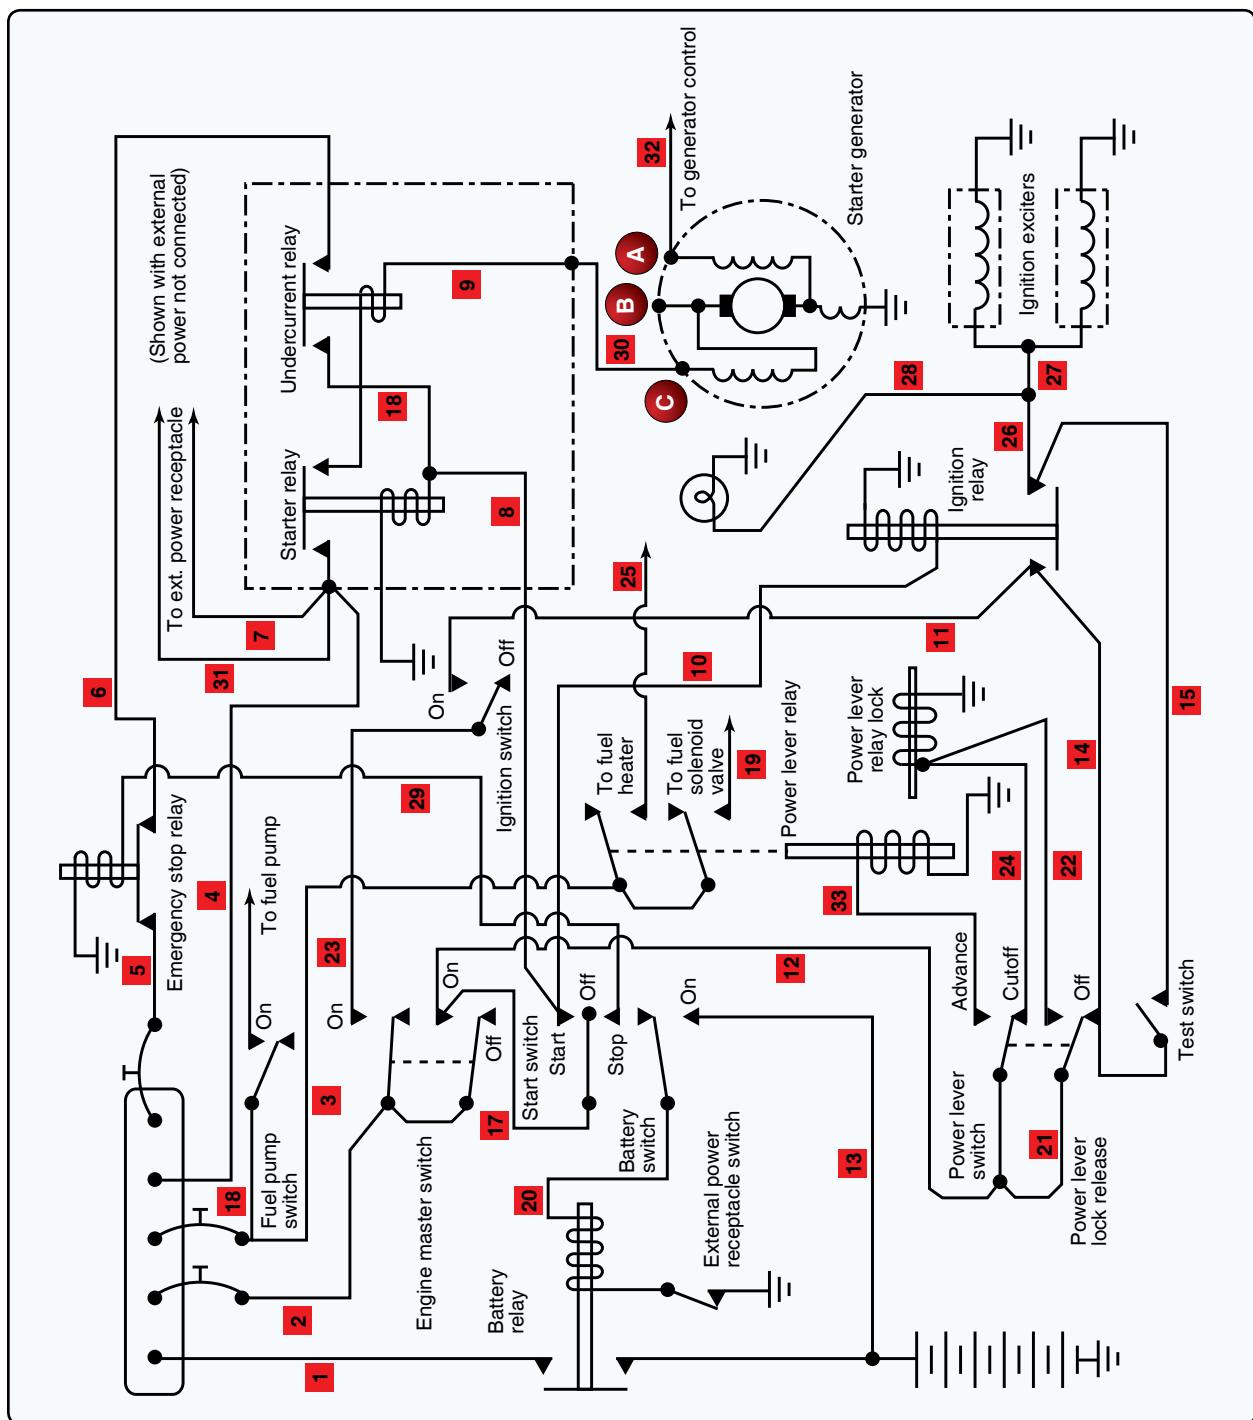


Figure 5. Starter-generator circuit.

## Appendix 2

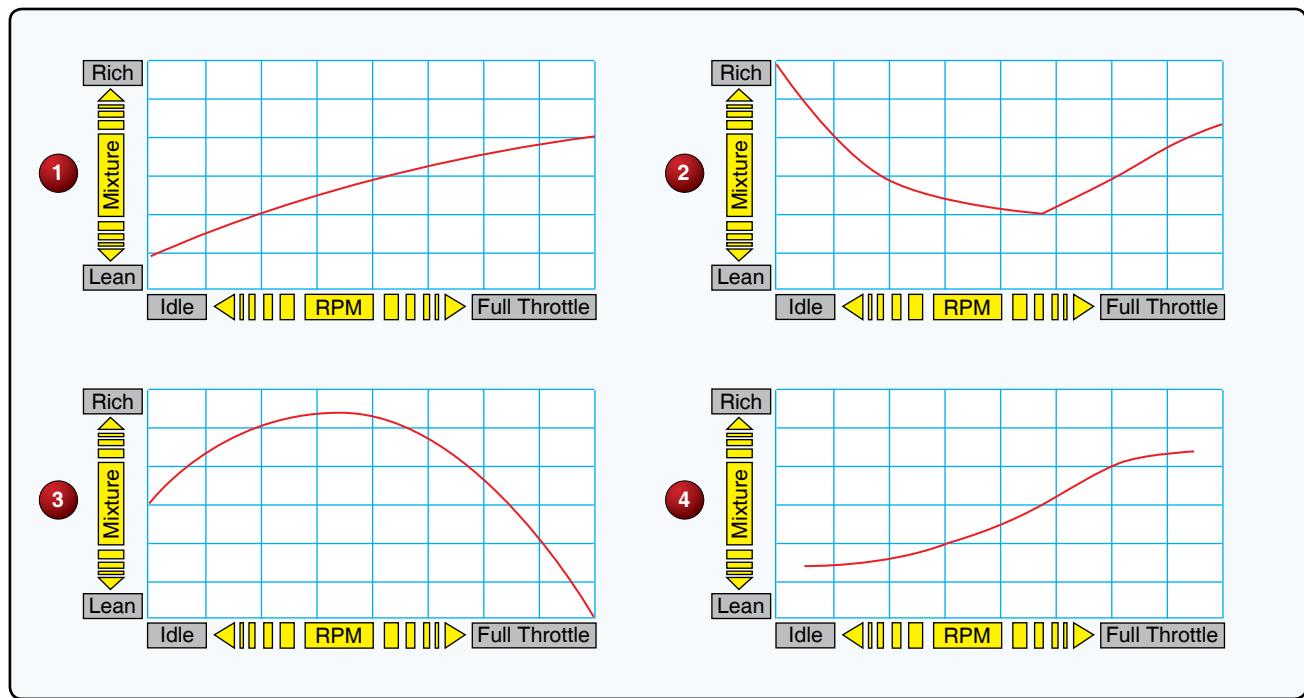

**Figure 6.** Fuel/air ratio graphs.



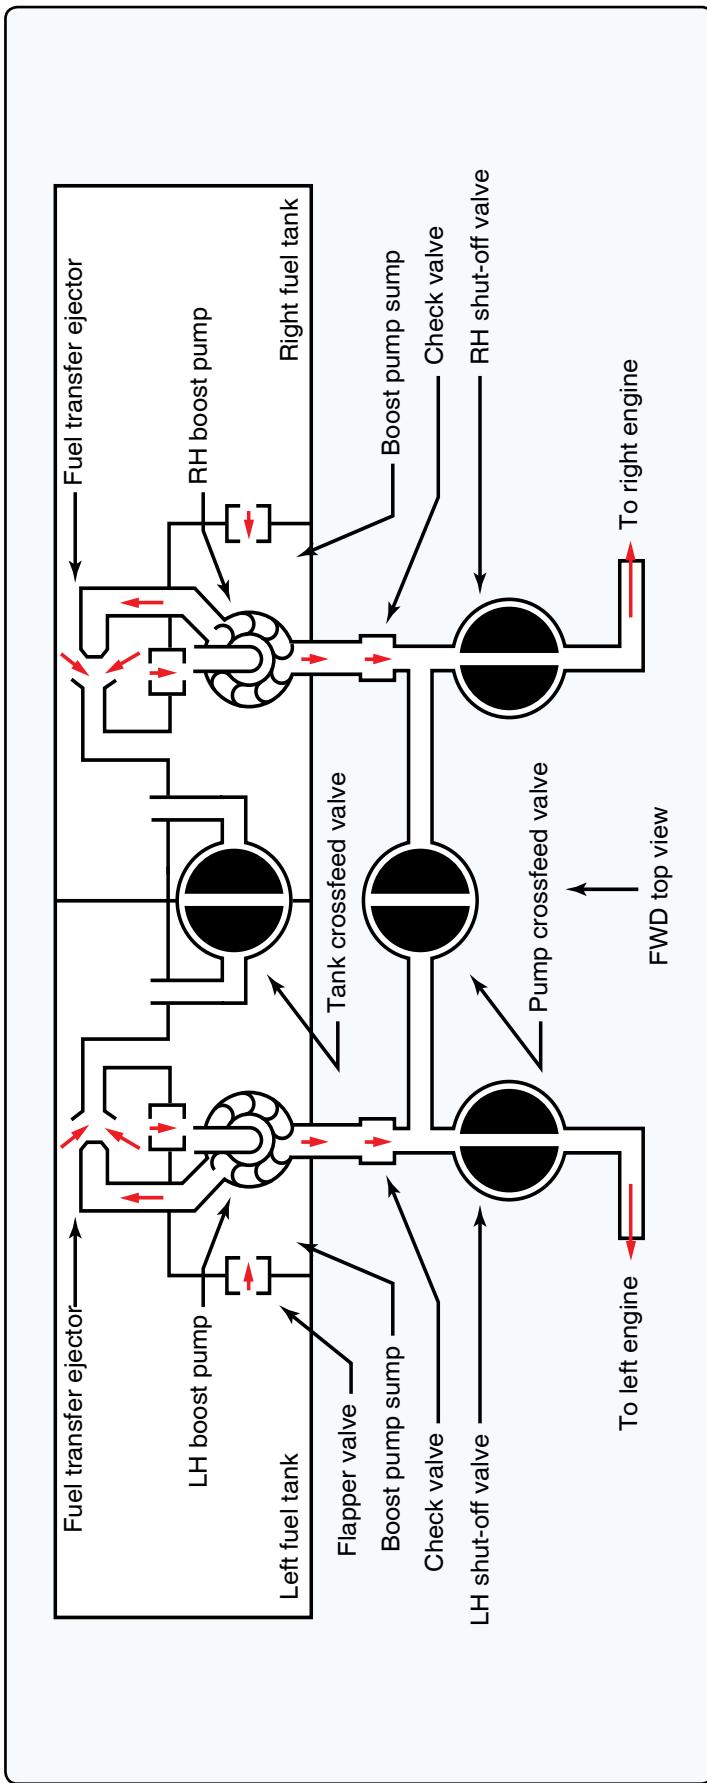


Figure 7. Fuel system.

# APPENDIX 3


## Aviation Mechanic Airframe

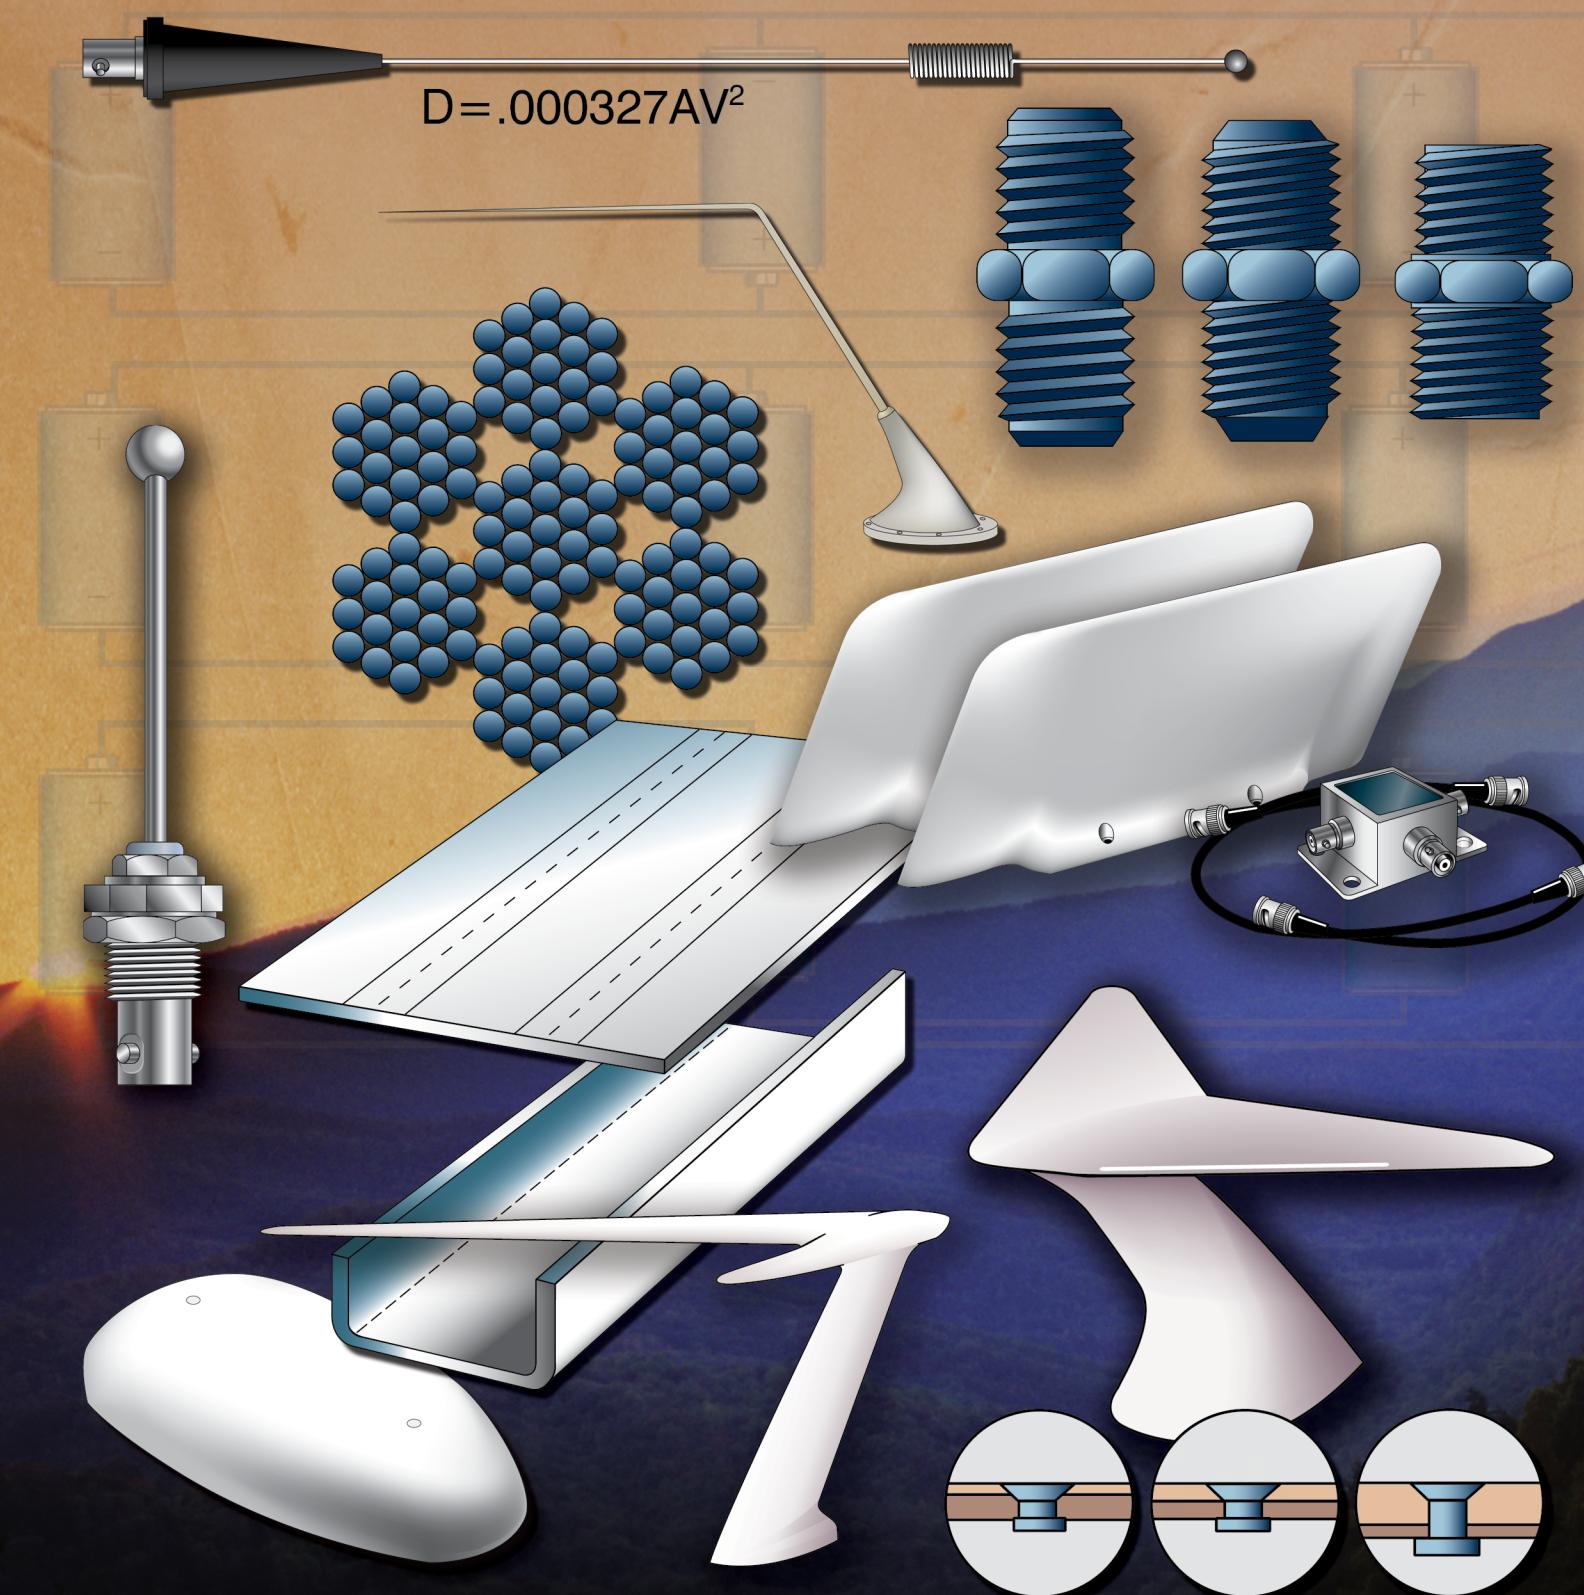

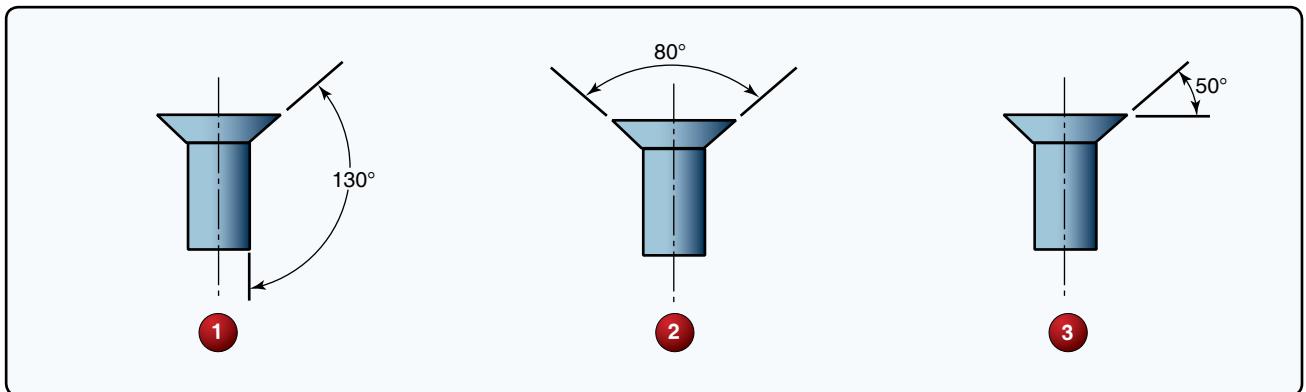


**Figure 1.** Rivets.


### Appendix 3



1




2




3

**Figure 2.** Countersinking.

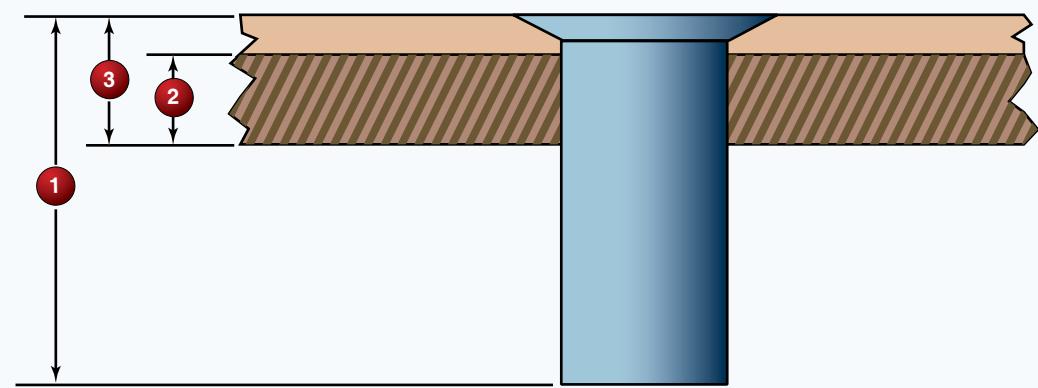


**Figure 3.** Grip length.

### Appendix 3

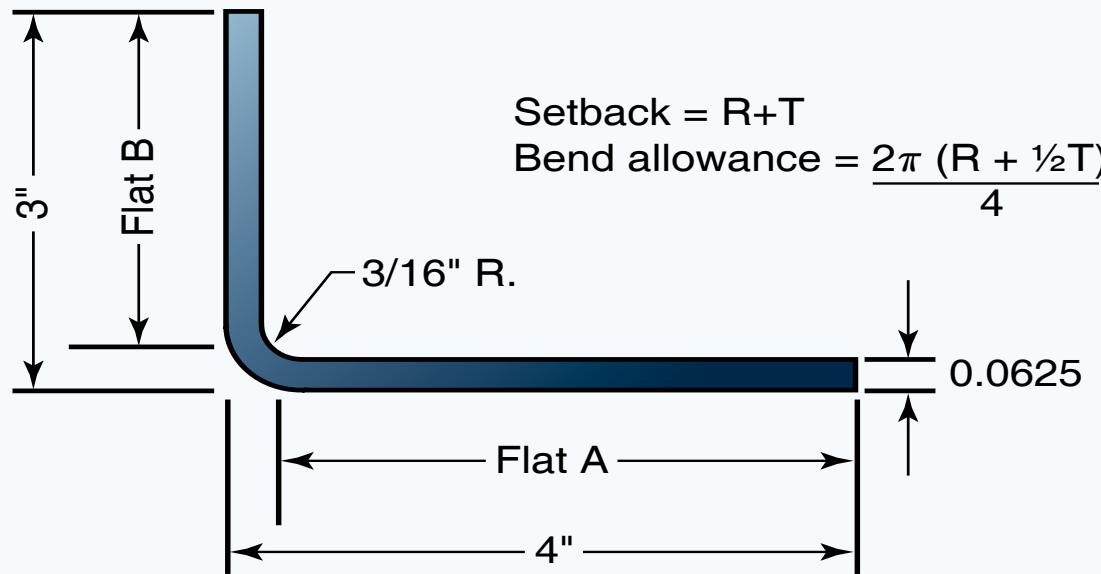

**Figure 4.** Bending sheet metal.

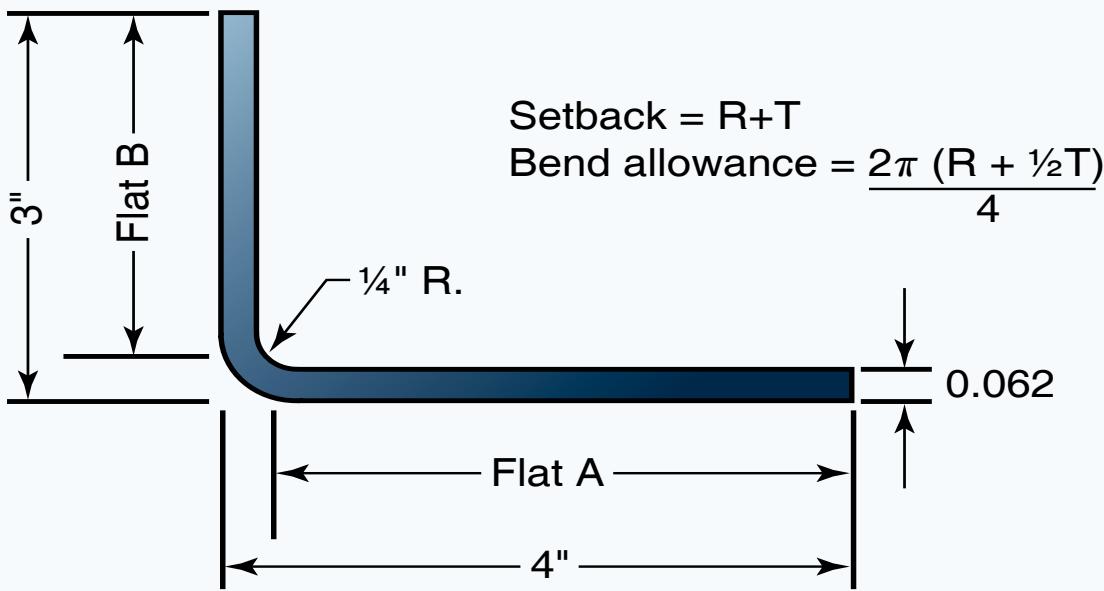

**Figure 5.** Sheet metal layout.

## Appendix 3

$$\text{Setback} = R + T$$
$$\text{Bend allowance} = \frac{2\pi (R + \frac{1}{2}T)}{4}$$



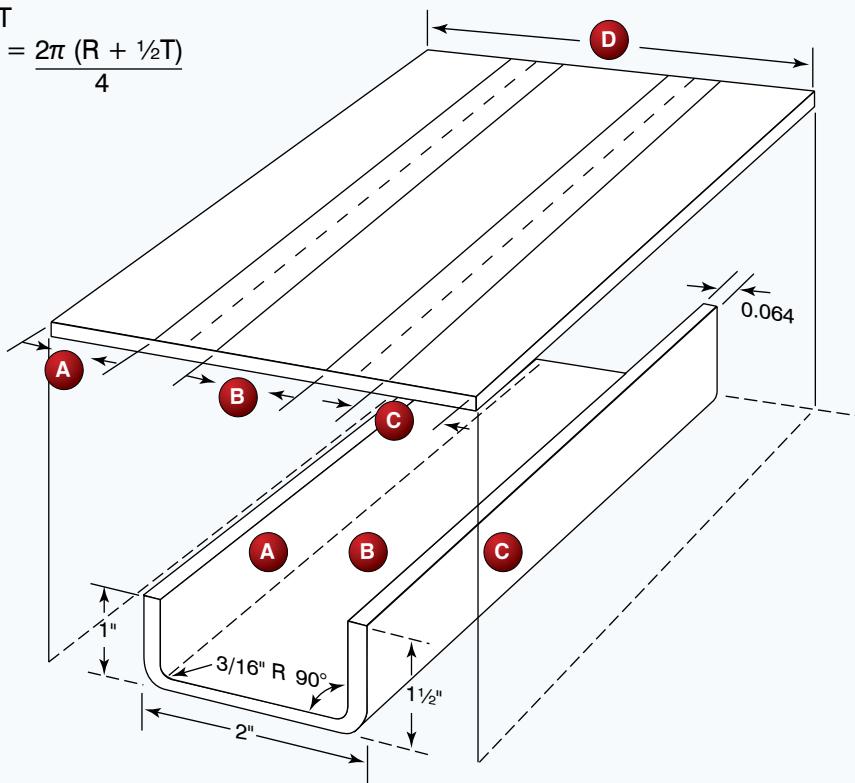


Figure 6. Sheet metal layout.

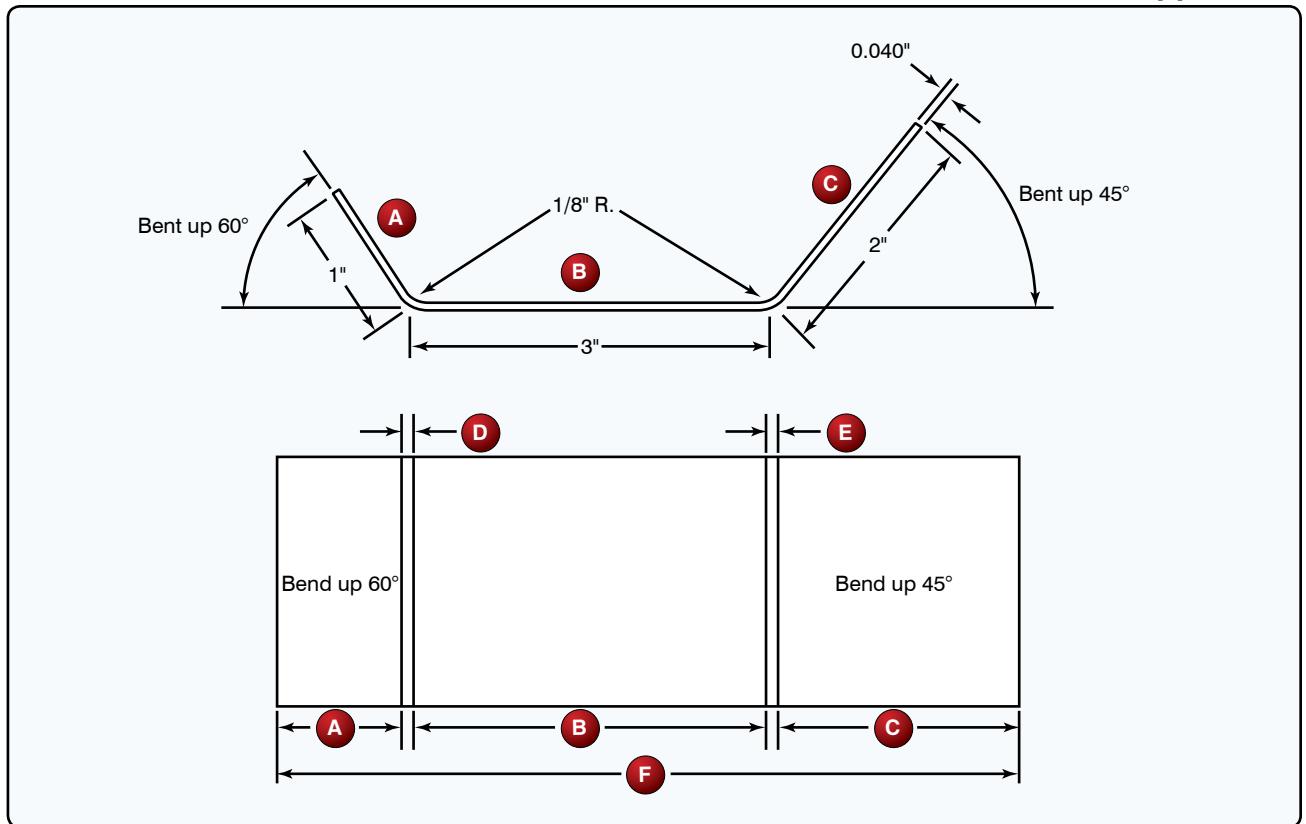


**Figure 7.** Sheet metal layout.

### Appendix 3

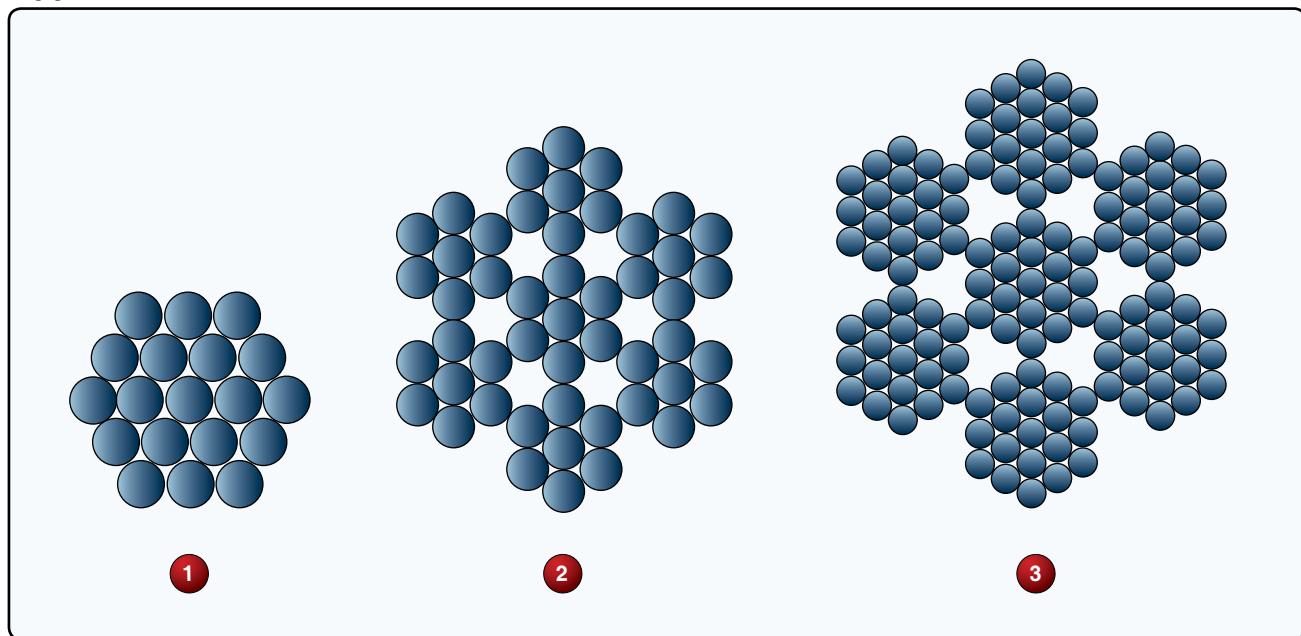

**Figure 8.** Control cable.

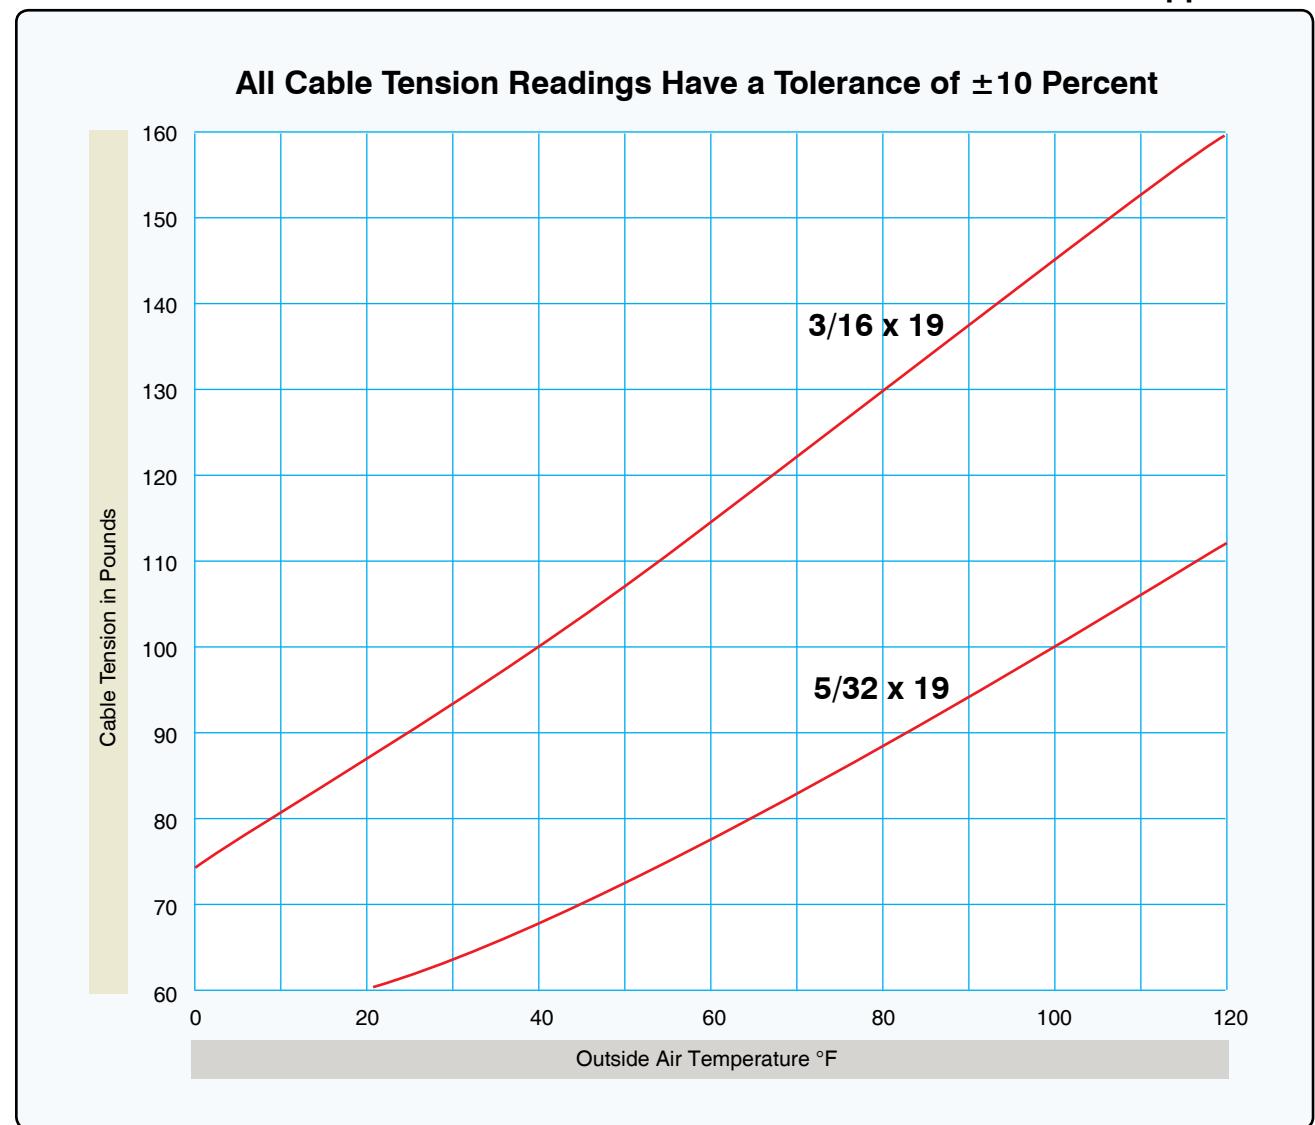

**Figure 9.** Cable tension chart.

### Appendix 3



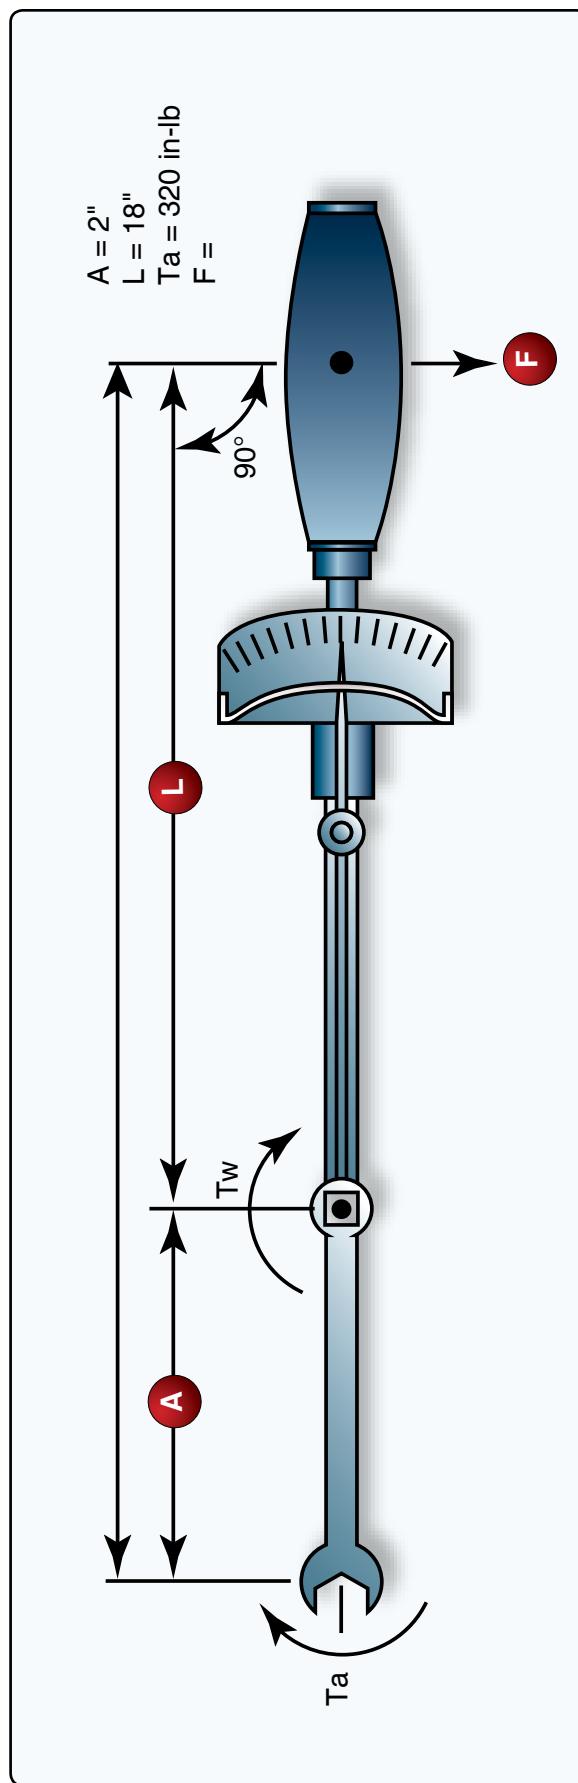


Figure 10. Torque value.

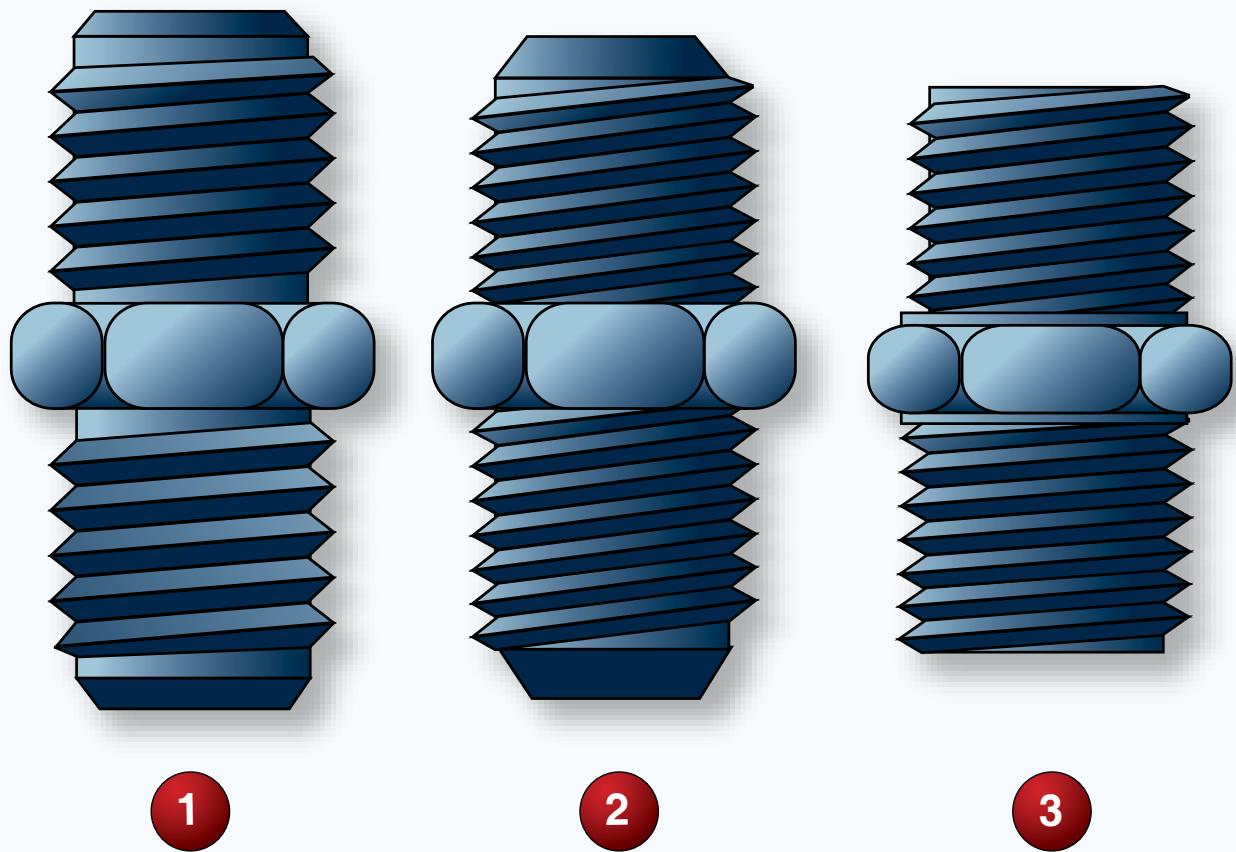

**Figure 11.** Fittings.

## Appendix 3

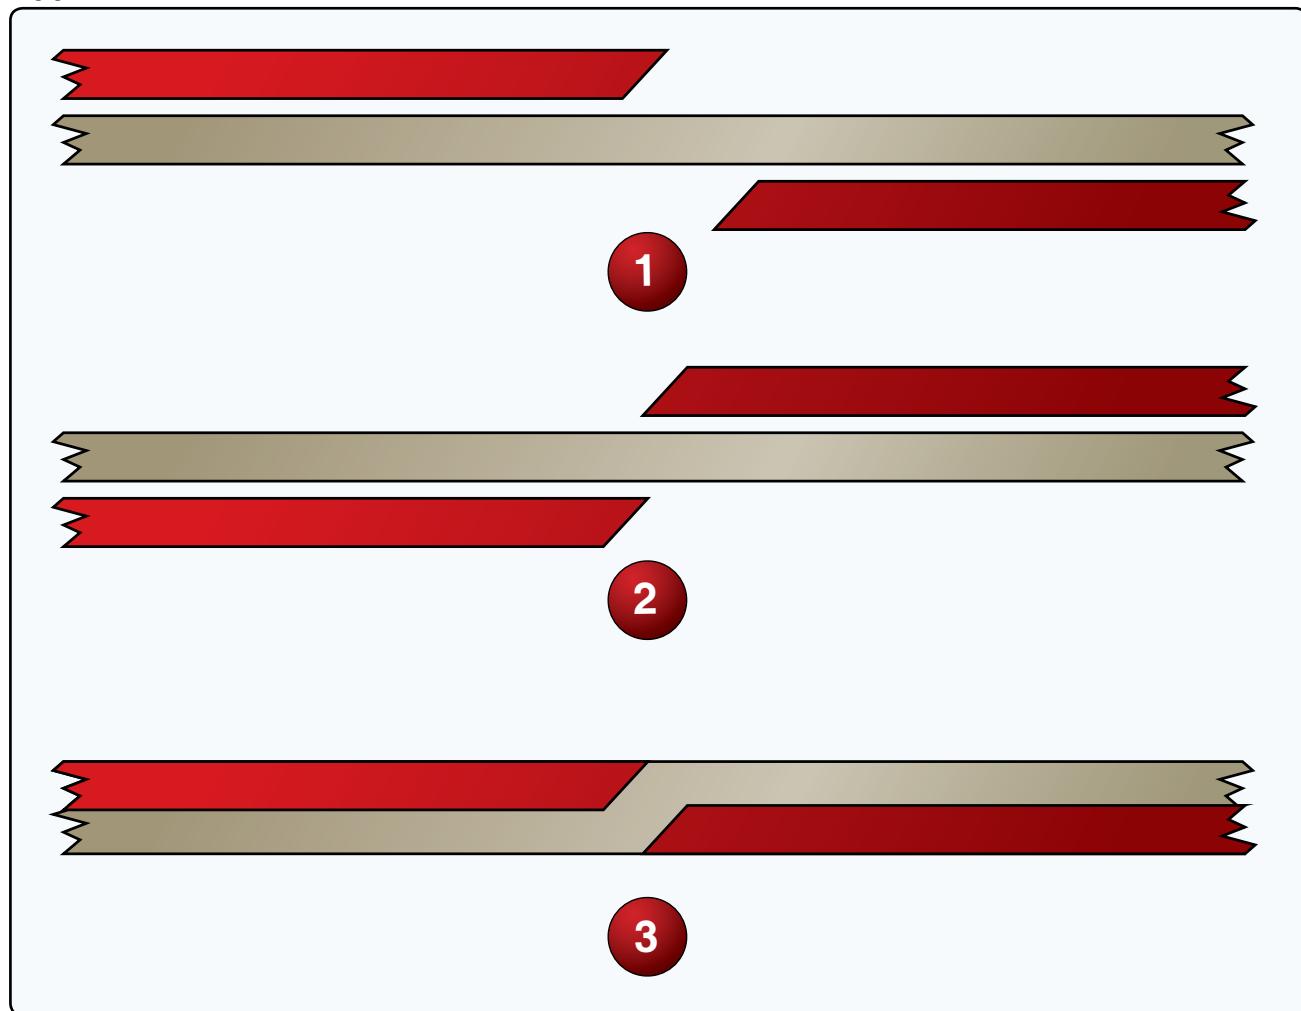

**Figure 12.** Backup rings.


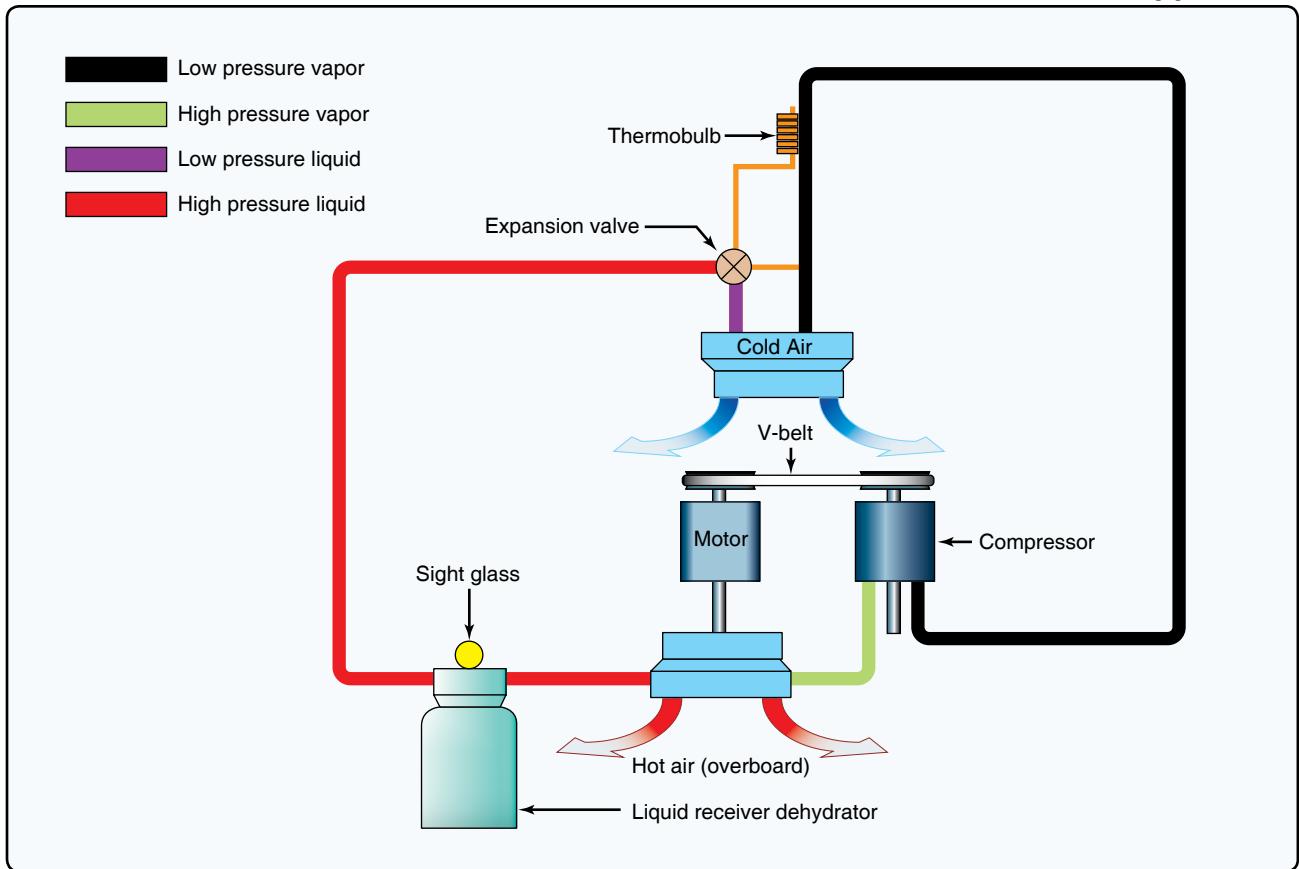


Figure 13. Cooling system.

## Appendix 3

### Pressure Temperature Correction Chart

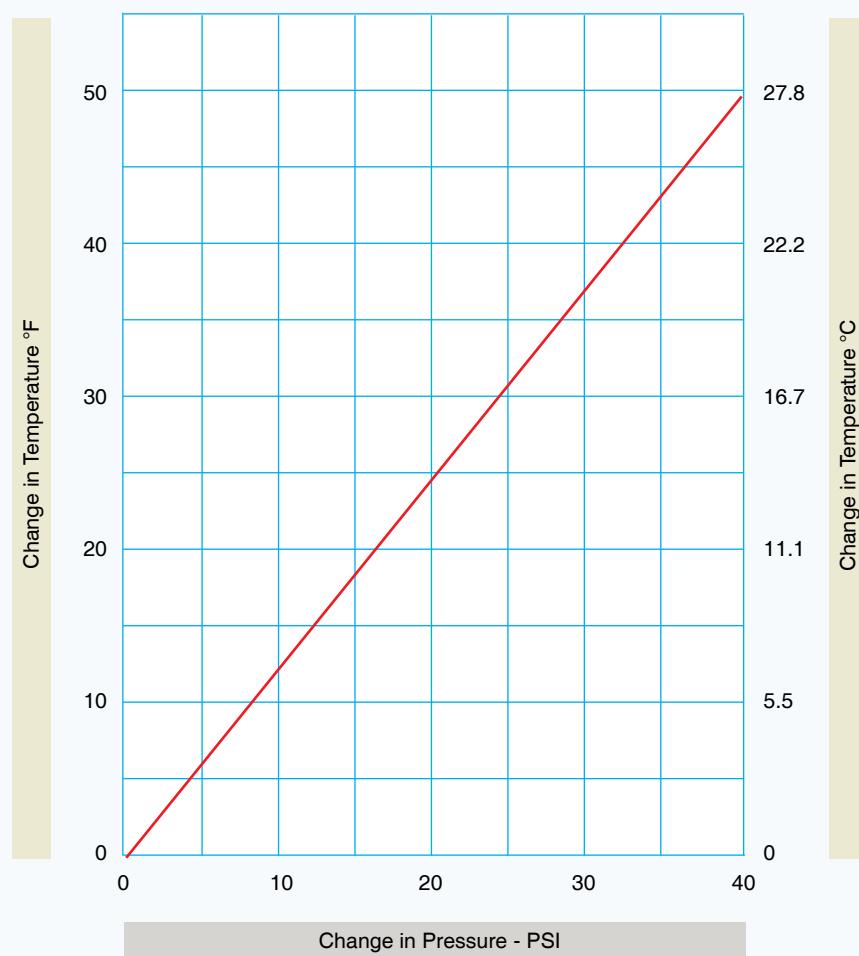


Correction of pressure during leakage test for change in temperature. Add pressure change if temperature rises. Subtract pressure change if temperature falls.

**Figure 14.** Pressure temperature correction chart.


$$D = .000327AV^2$$

**Figure 15.** Formula.

### Appendix 3

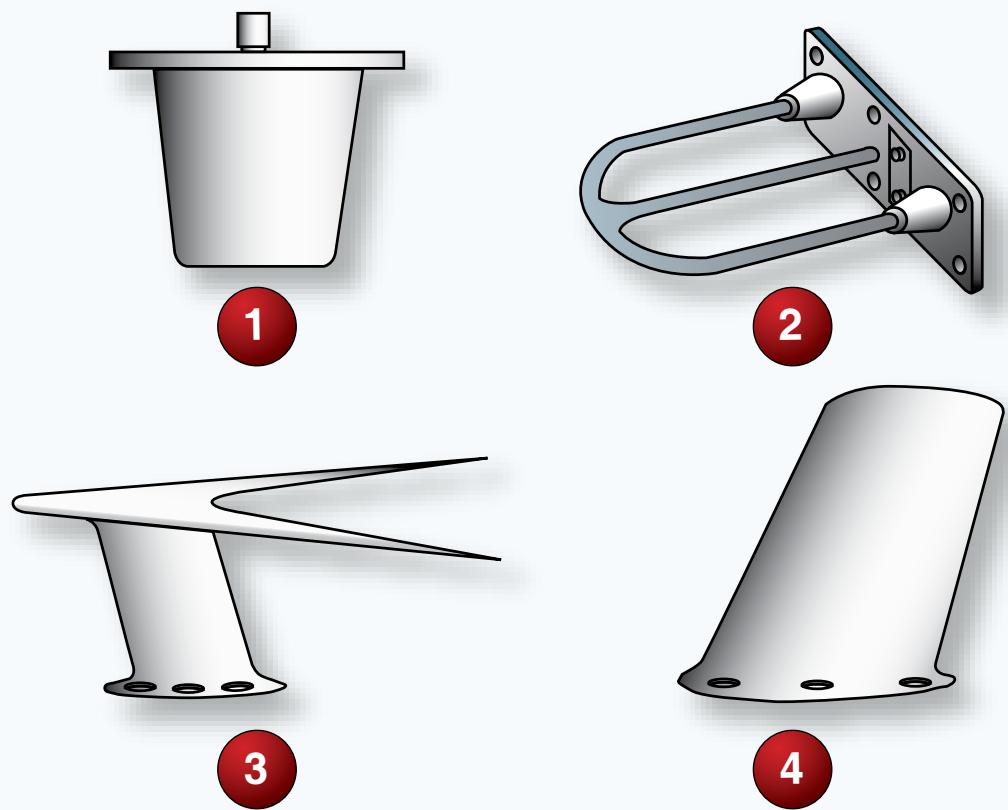


**Figure 16.** Antennas.

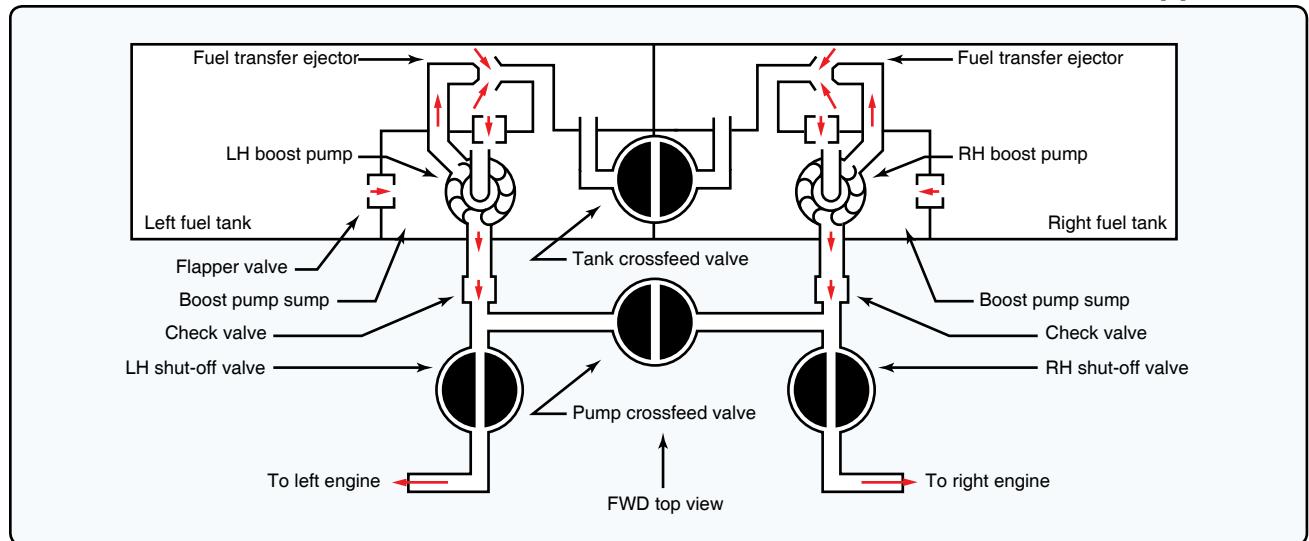

**Figure 17.** Fuel system.

### Appendix 3

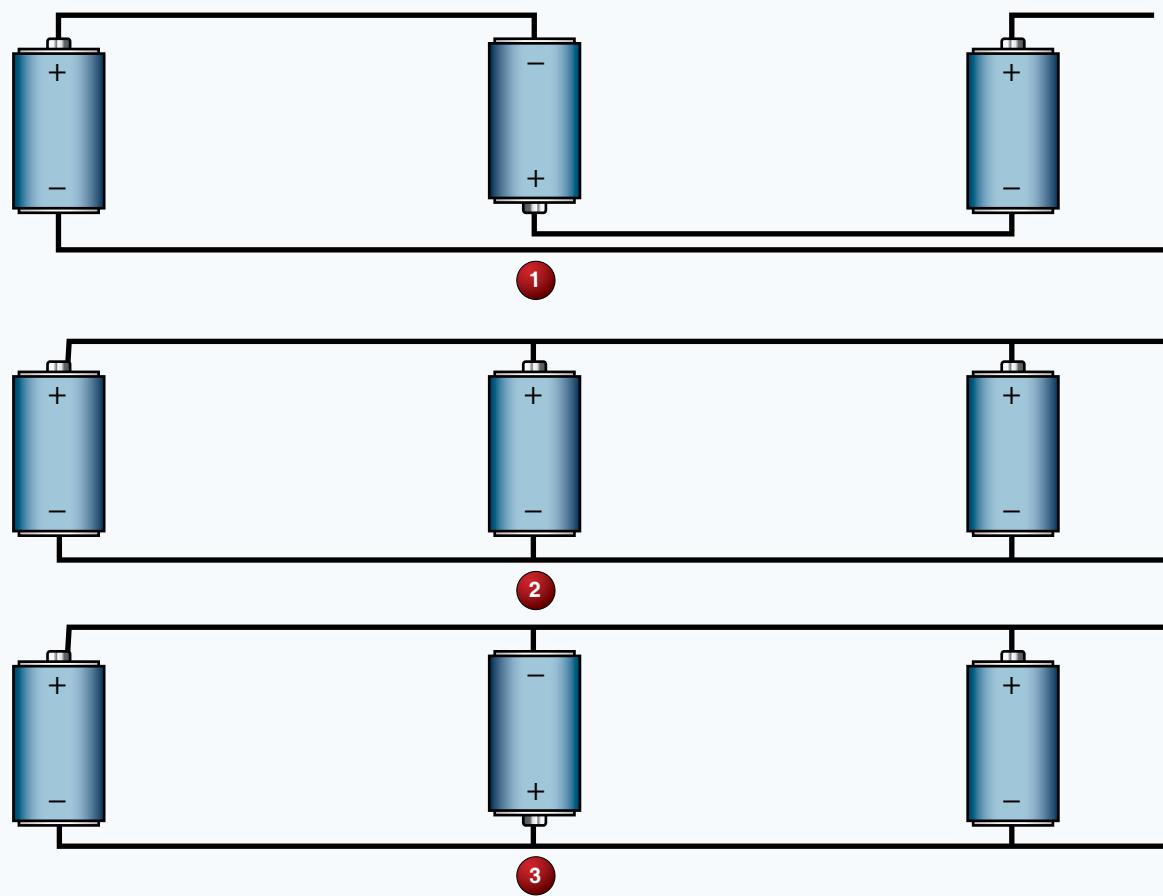

**Figure 18.** Battery connections.

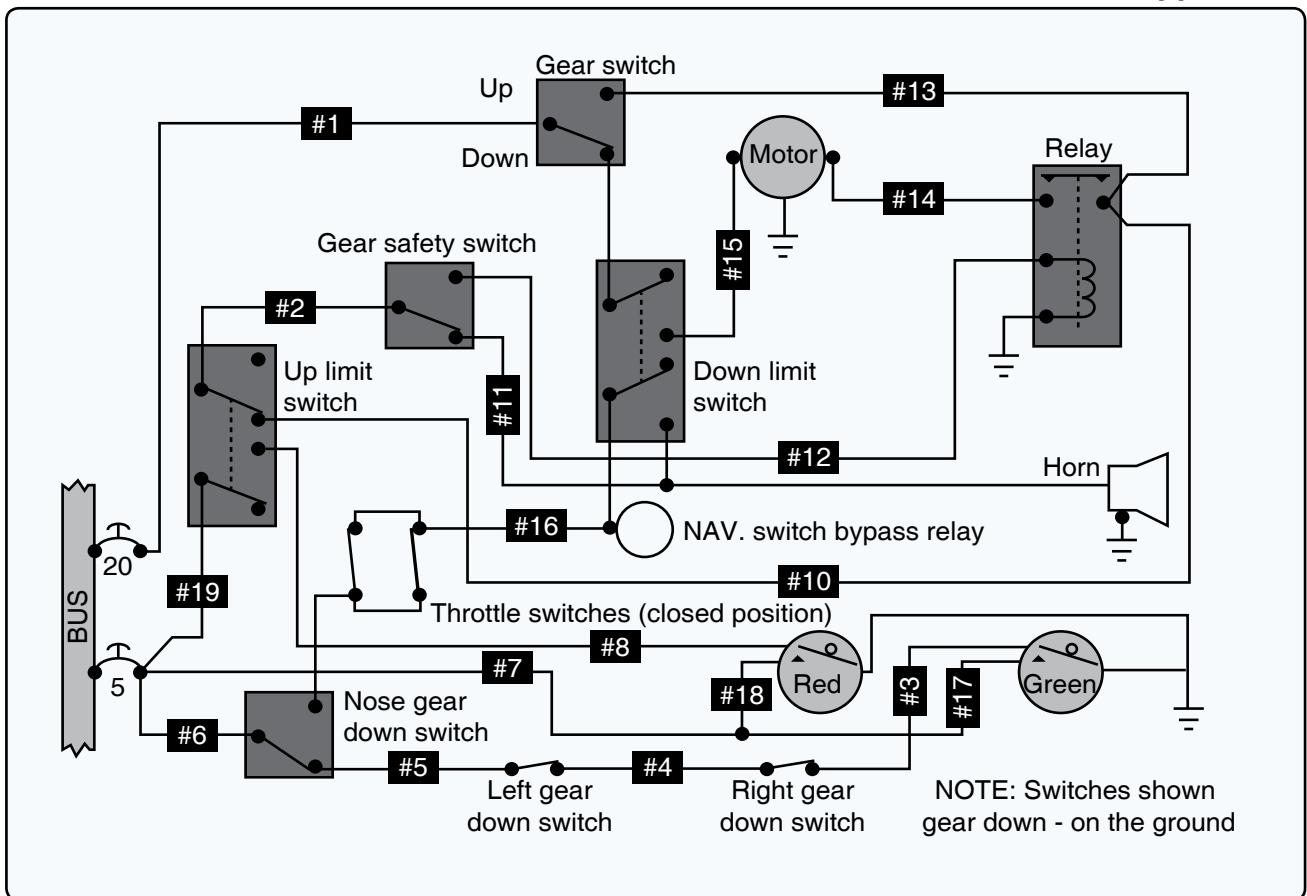


Figure 19. Landing gear circuit.

## Appendix 3


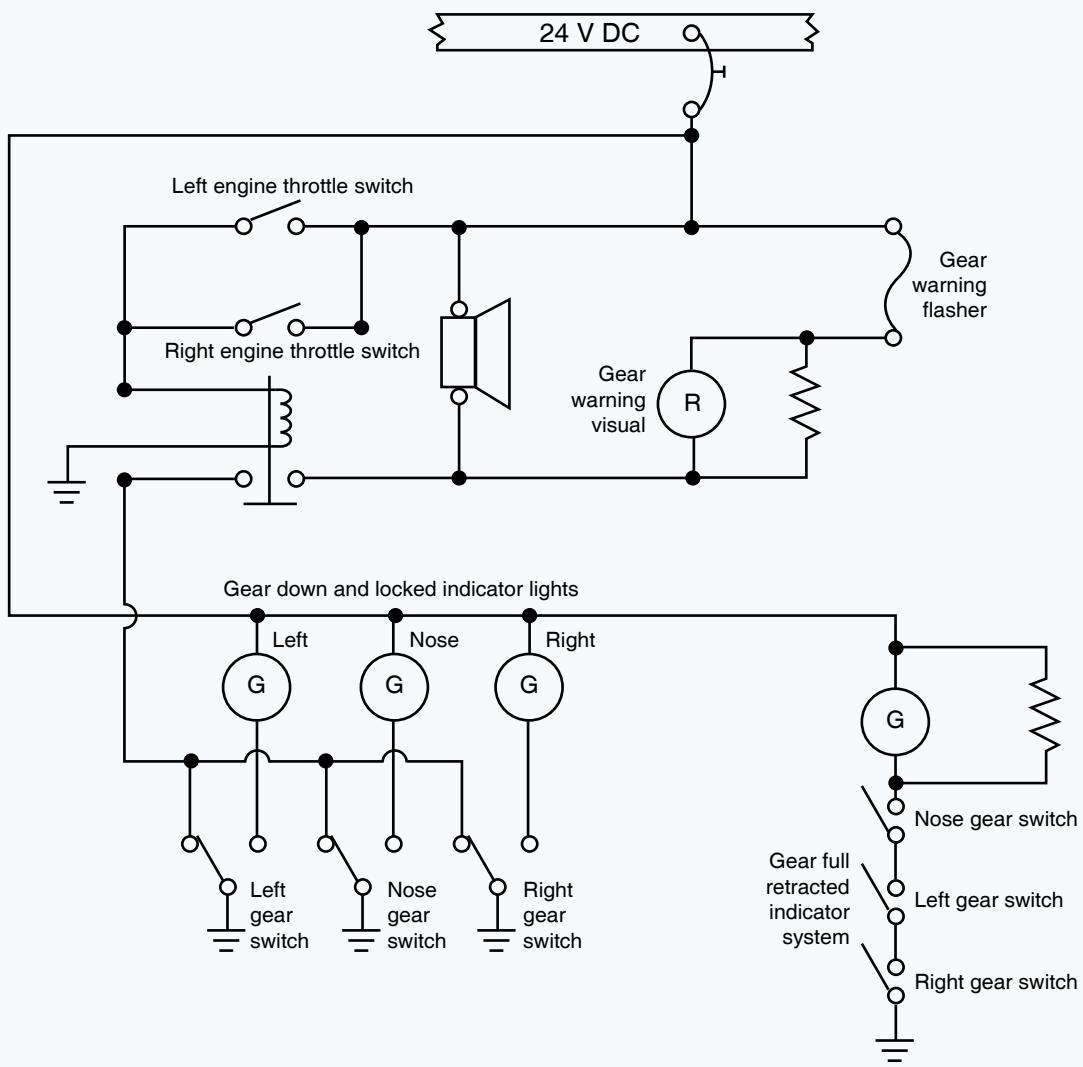


Figure 20. Landing gear circuit.


Container Pressure Versus Temperature		
Temperature °F	Container Pressure (PSIG)	
	Minimum	Maximum
-40	60	145
-30	83	165
-20	105	188
-10	125	210
0	145	230
10	167	252
20	188	275
30	209	295
40	230	317
50	255	342
60	284	370
70	319	405
80	356	443
90	395	483
100	438	523

**Figure 21.** Fire extinguisher chart.

### **Appendix 3**

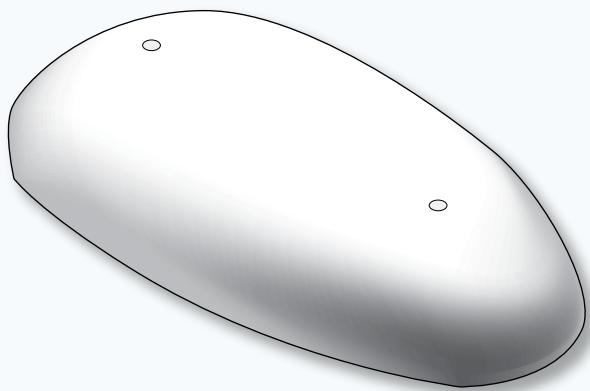


**Figure 22.** Antenna.

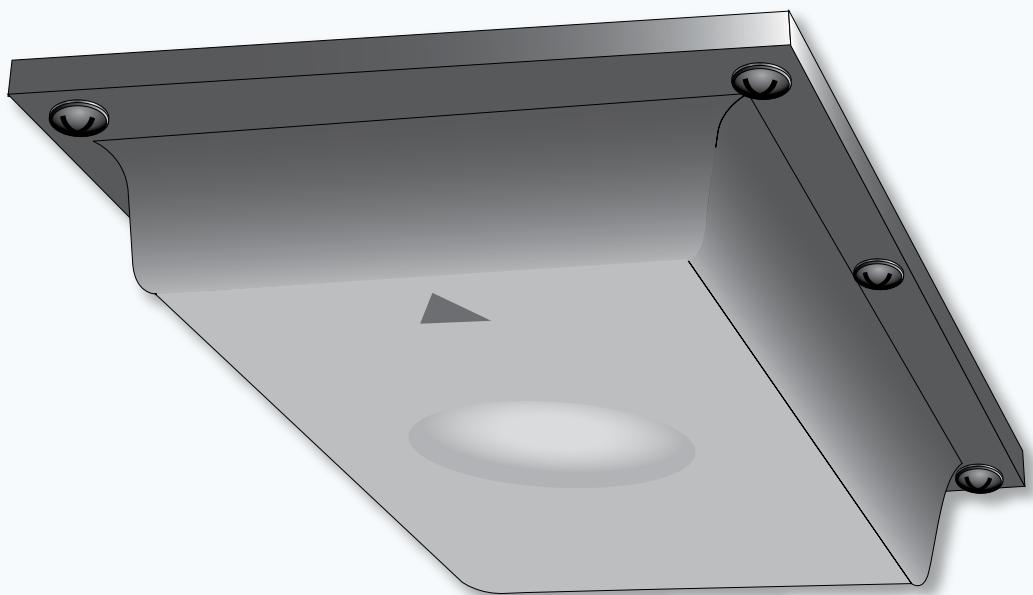

**Figure 23.** Antenna.

## Appendix 3

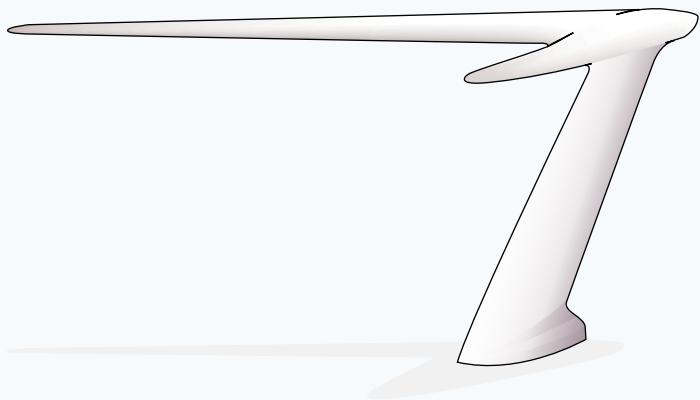

**Figure 24.** Antenna.




**Figure 25.** Antenna.

### Appendix 3



**Figure 26.** Antenna.

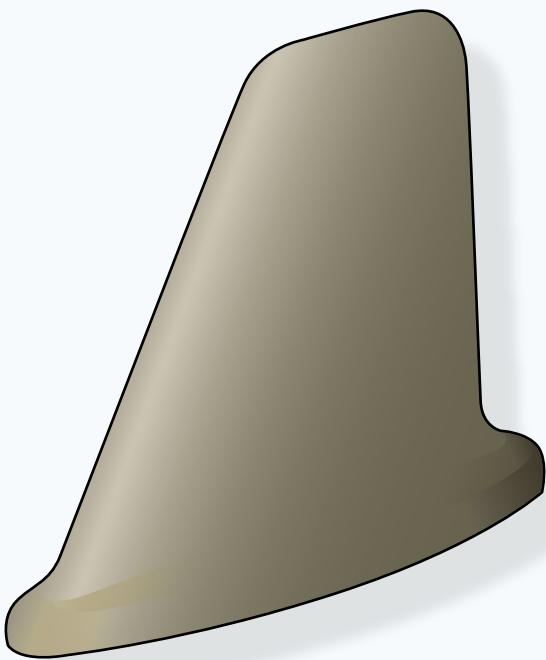


**Figure 27.** Antenna.

## Appendix 3




**Figure 28.** Antenna.

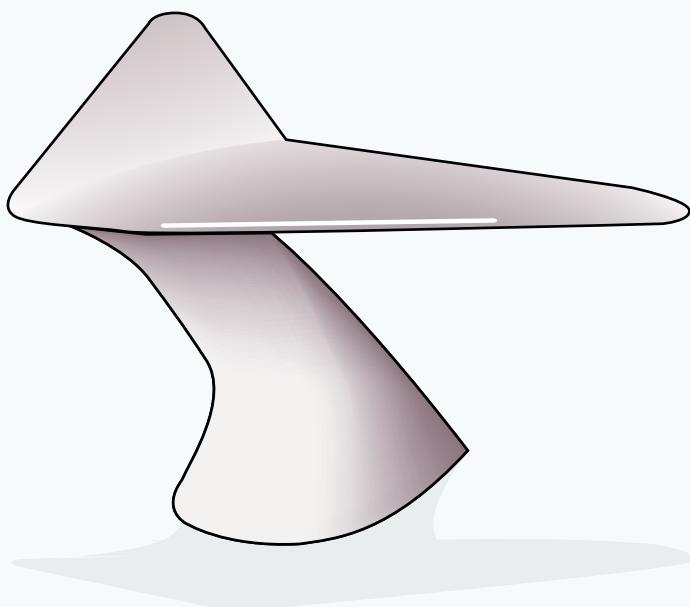


**Figure 29.** Antenna.

## Appendix 3

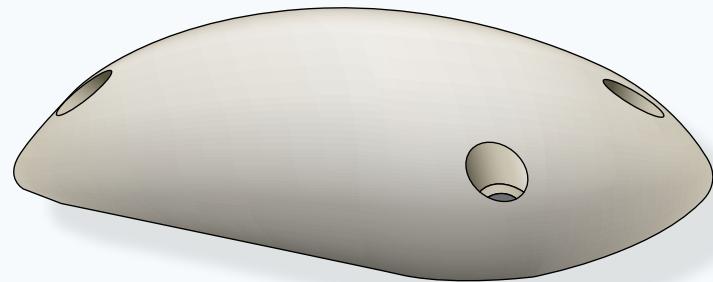

**Figure 30.** Antenna.

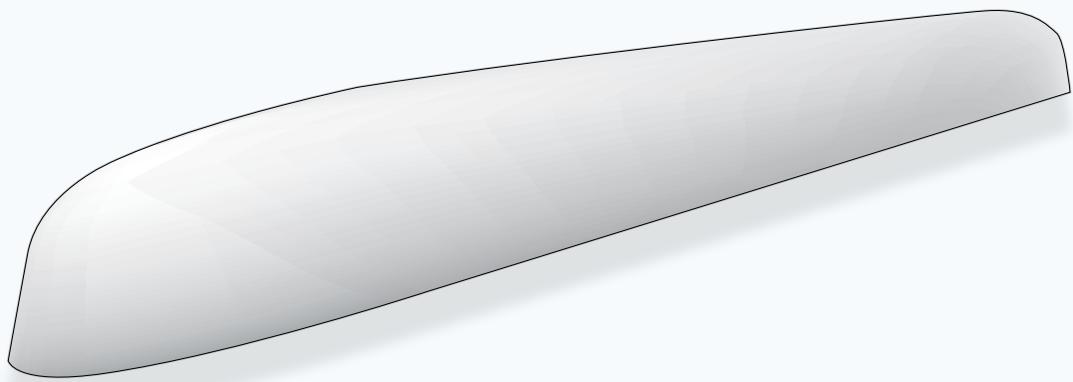


**Figure 31.** Antenna.

## Appendix 3




**Figure 32.** Antenna.

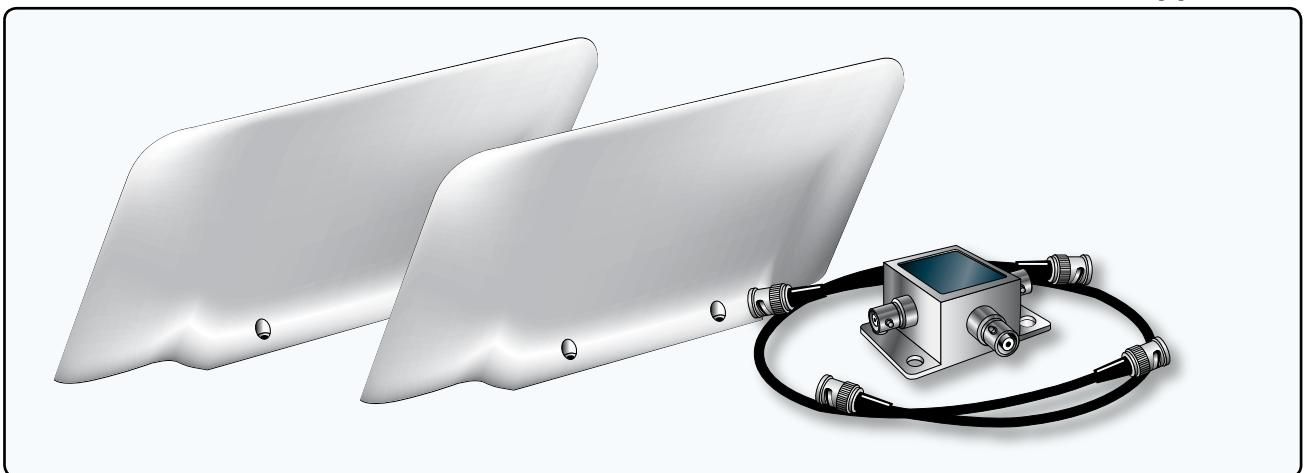

**Figure 33.** Antenna.





### Appendix 3

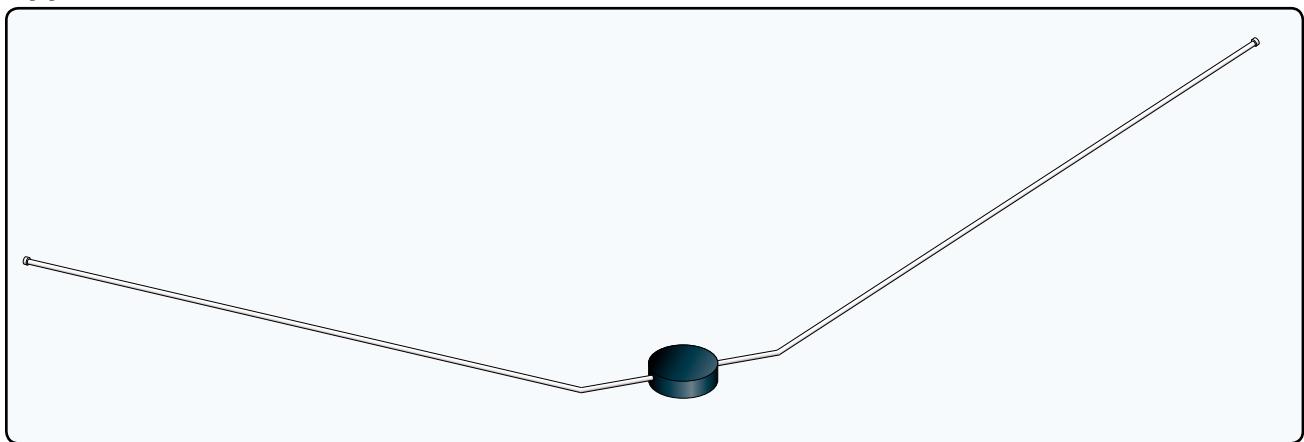


**Figure 34.** Antenna.

# APPENDIX 4


## Parachute Rigger

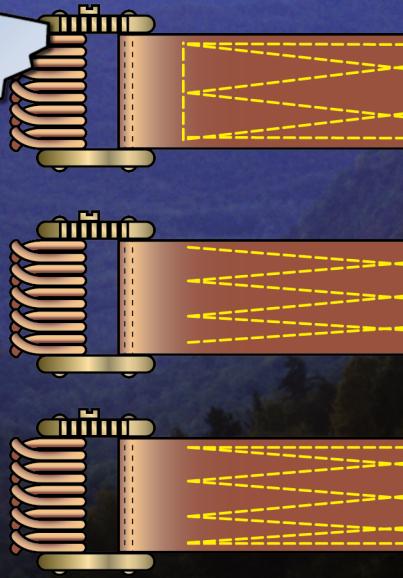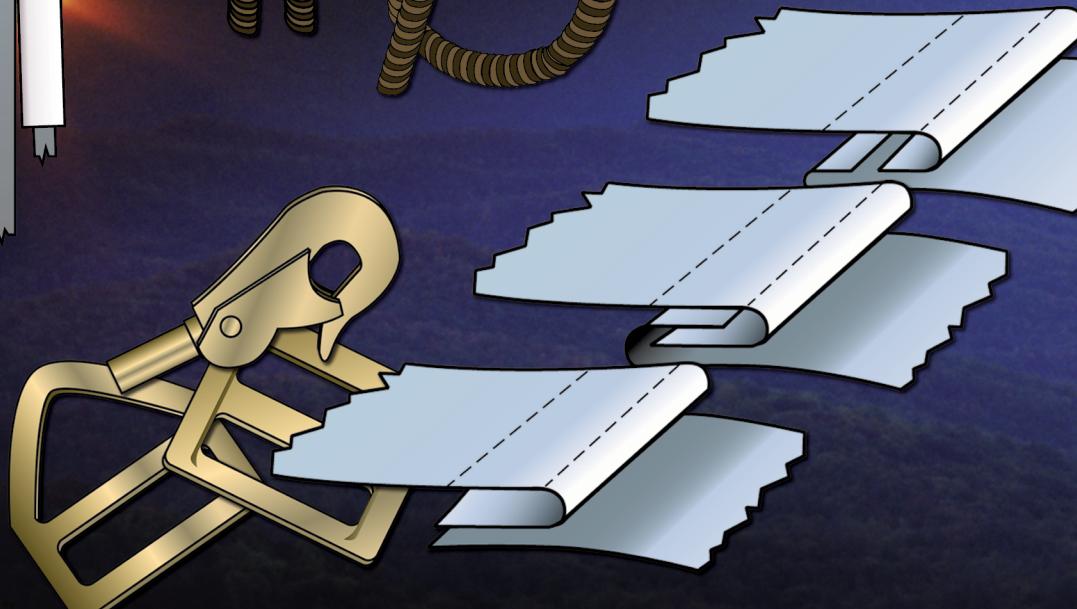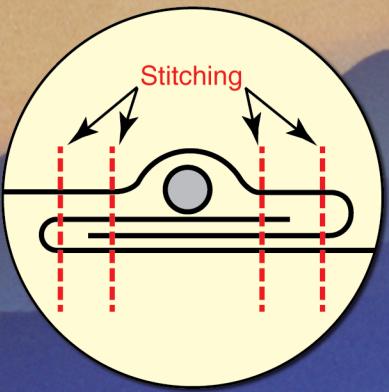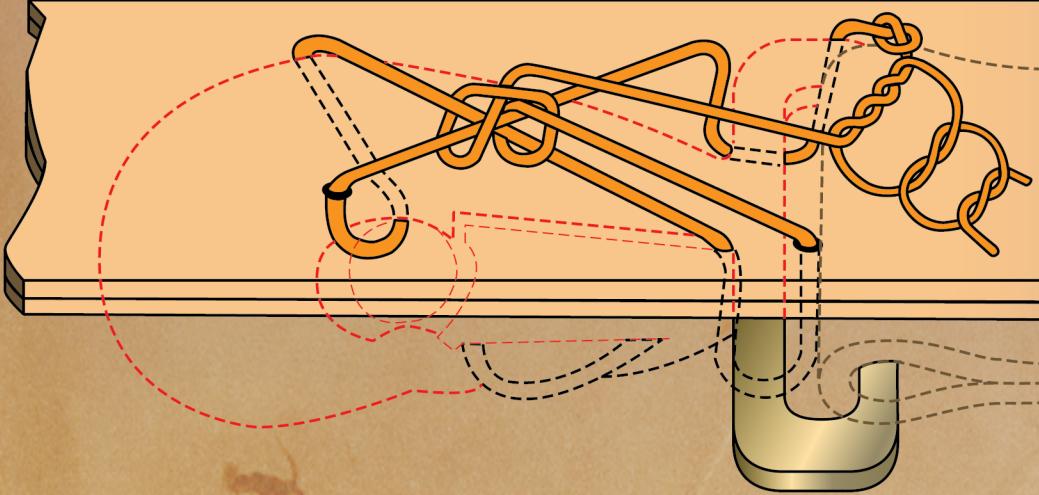

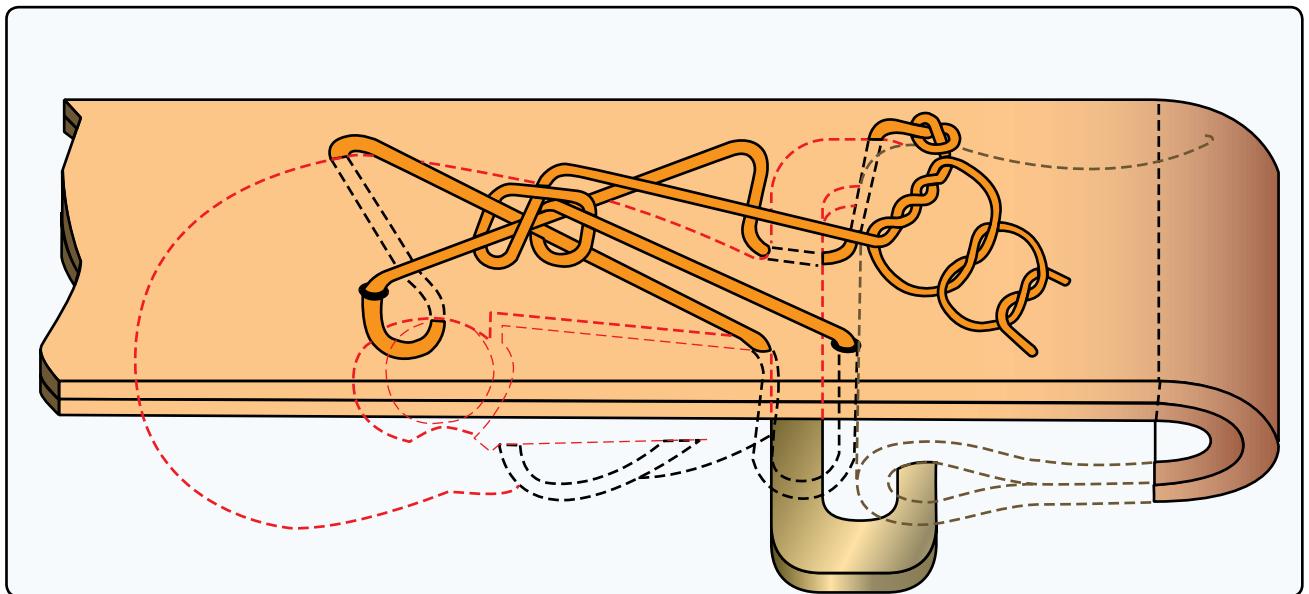


**Figure 1.** Tacking knot.

## Appendix 4

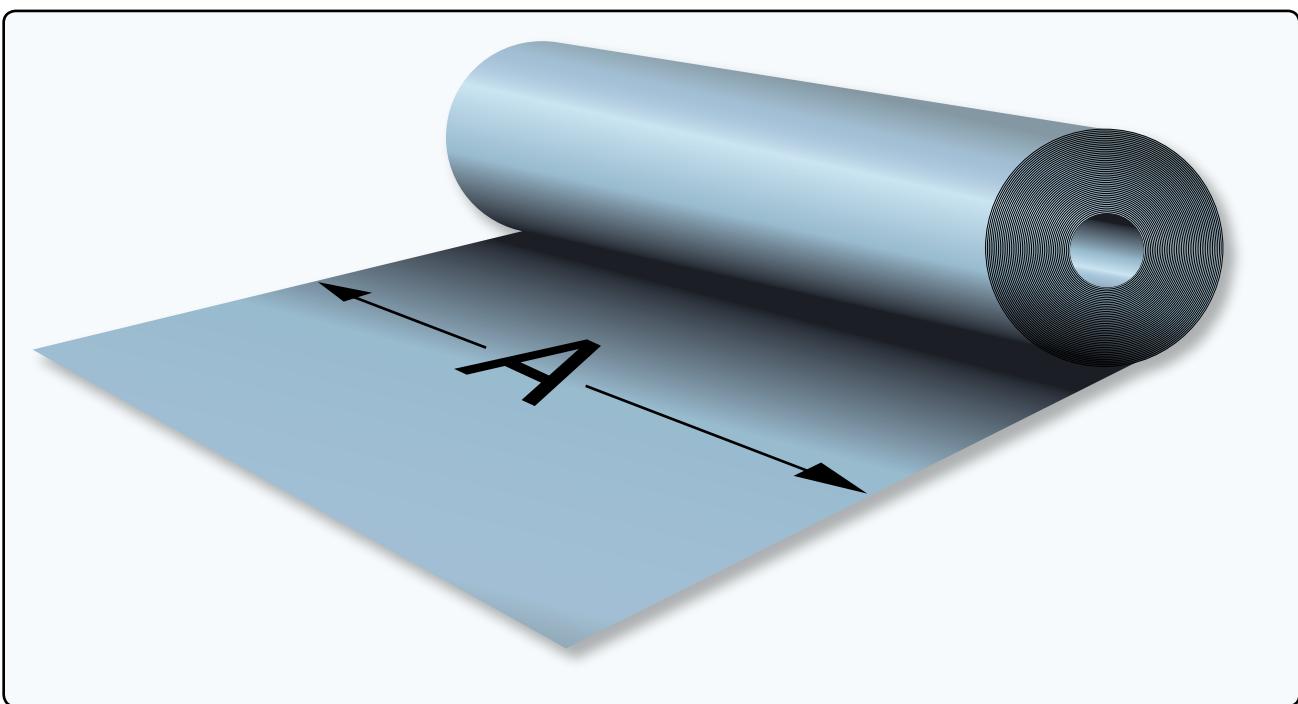


**Figure 2.** Parachute material.

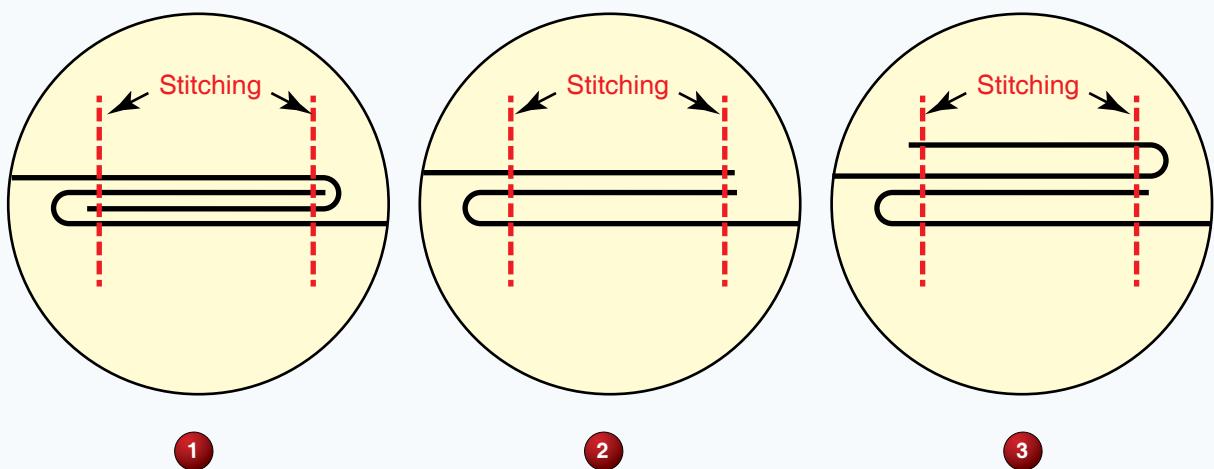


**Figure 3.** Seam stitching.

## Appendix 4

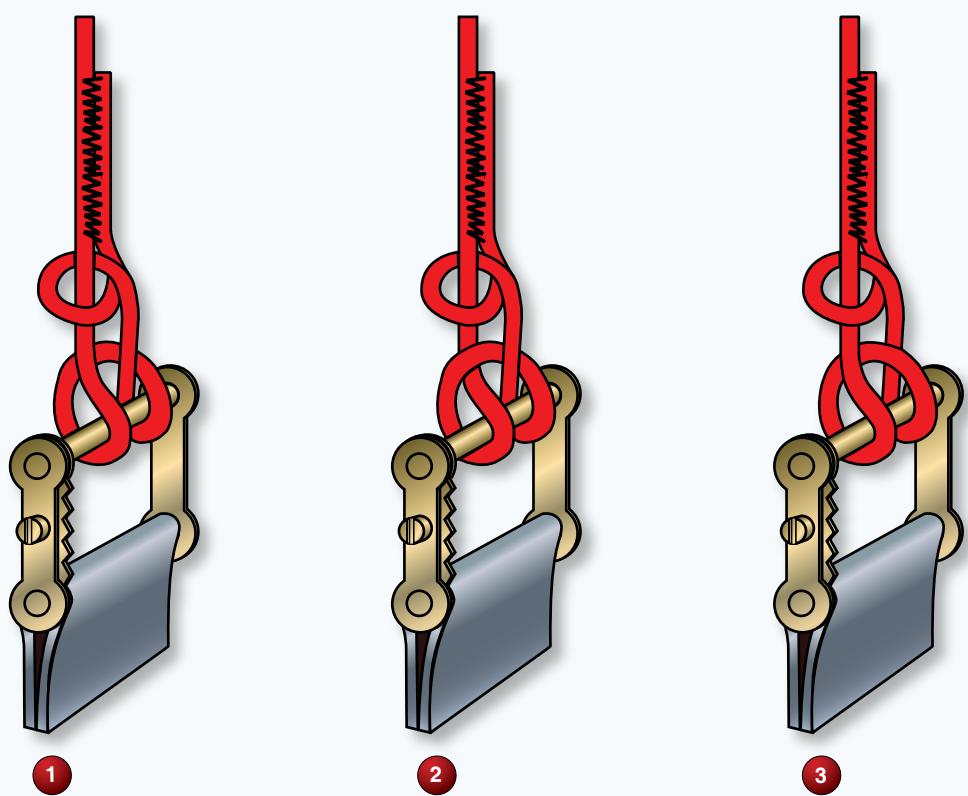


**Figure 4.** Suspension line attachment.

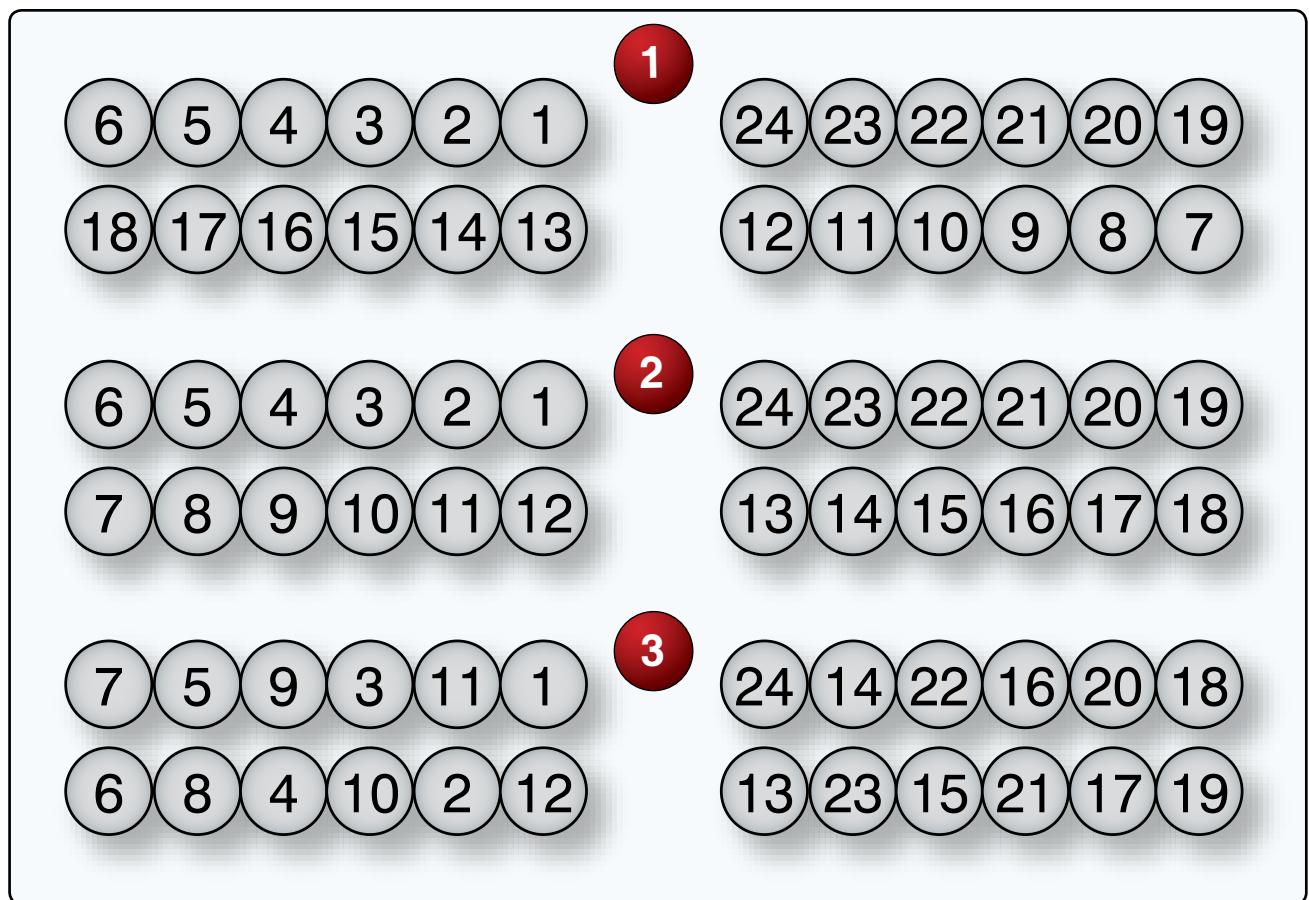


**Figure 5.** Suspension lines.

## Appendix 4

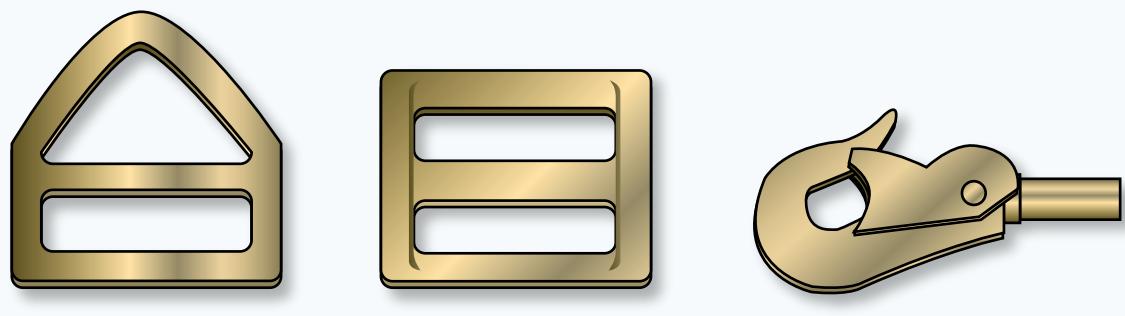


**Figure 6.** Fittings.

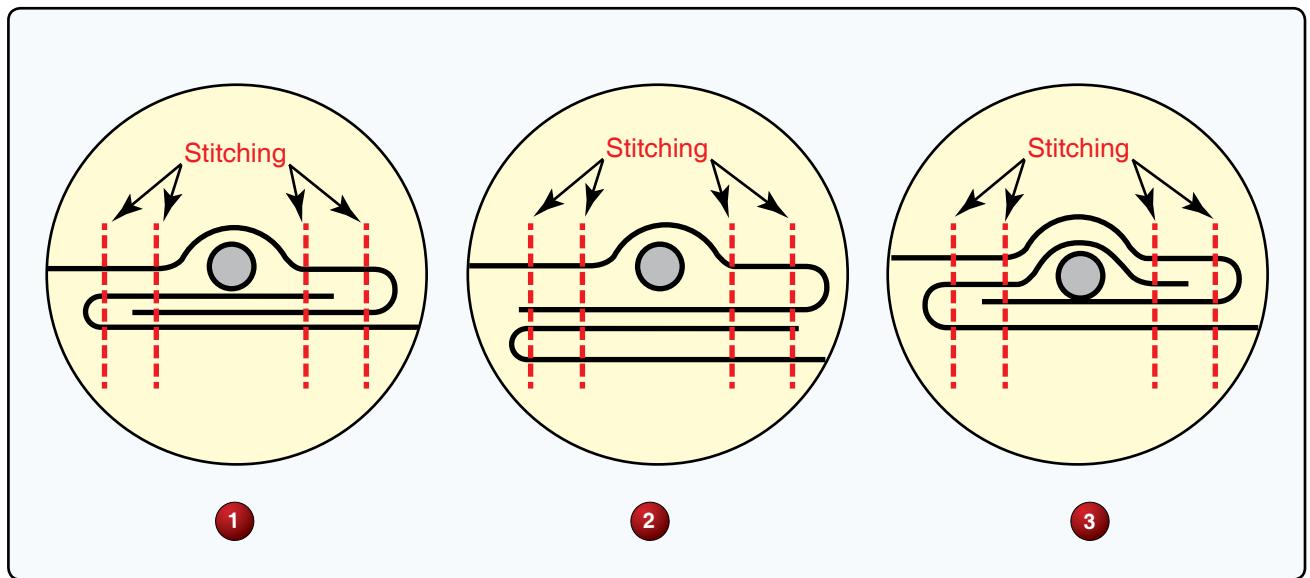


**Figure 7.** Radial seam stitching.

## Appendix 4

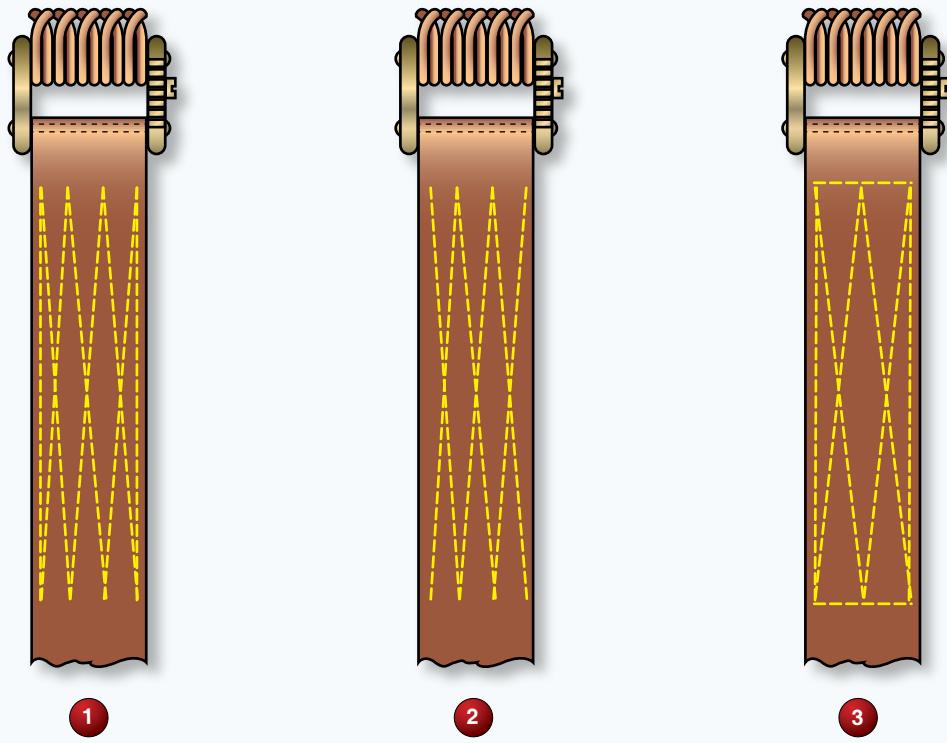


**Figure 8.** Lift web stitching.

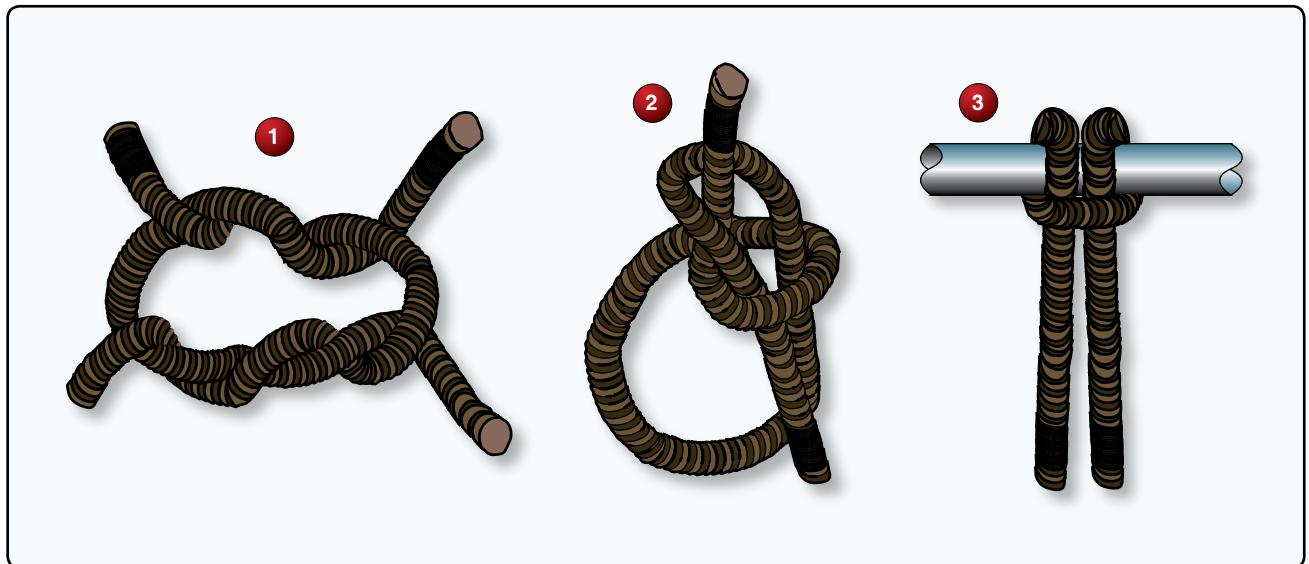


**Figure 9.** Knots.

## Appendix 4

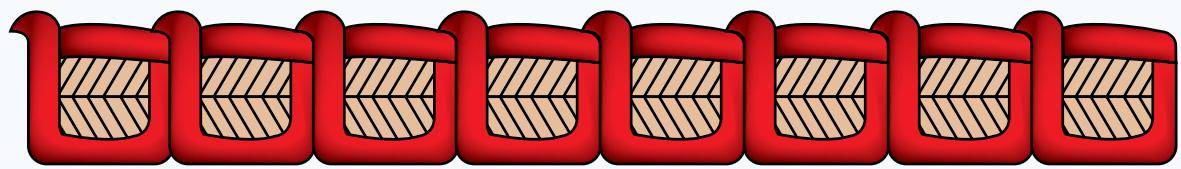


Sewing Machine Table

**Figure 10.** Machine stitching.

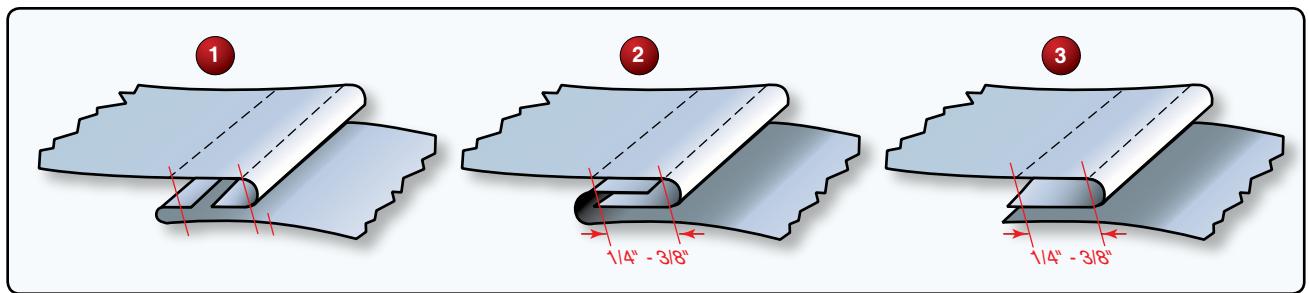


**Figure 11.** French fell seam.

## Appendix 4

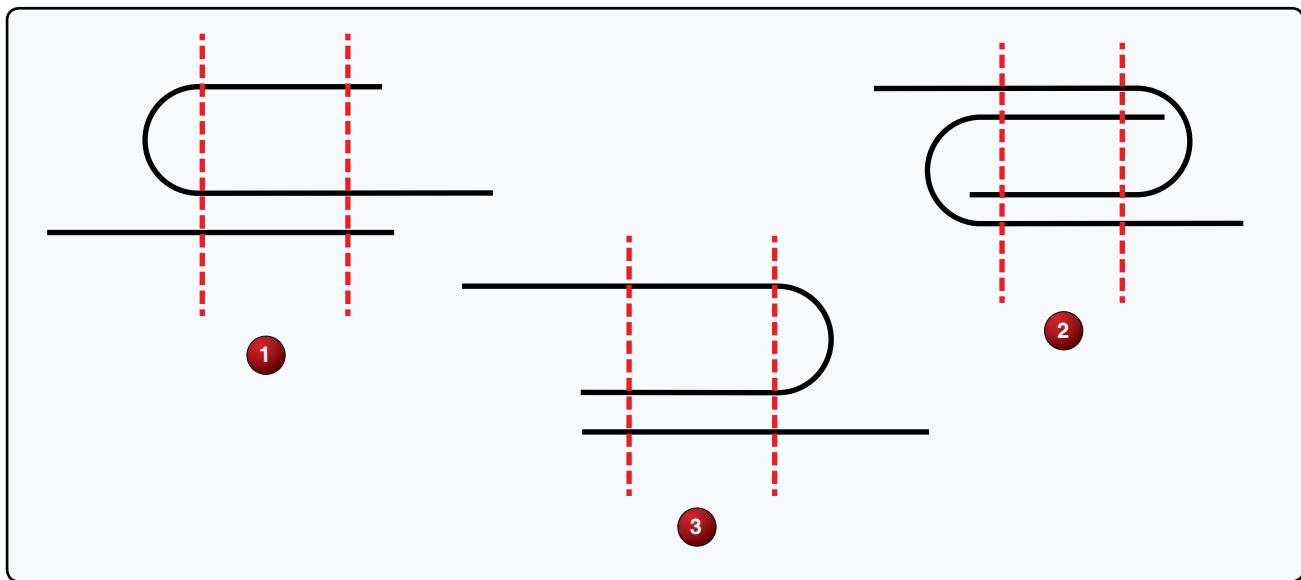


**Figure 12.** English fell seam.

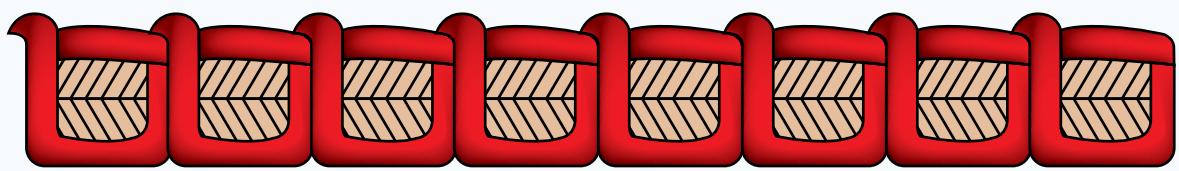

Sewing Machine Table


**Figure 13.** Machine stitching.

## Appendix 4

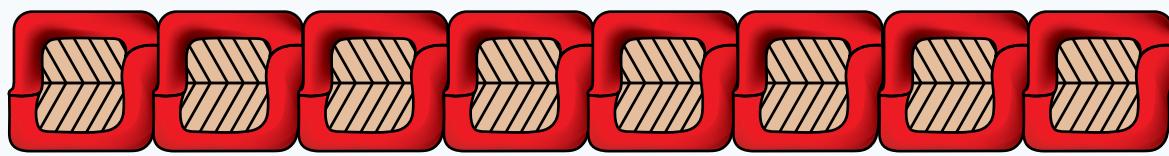

Sewing Machine Table


**Figure 14.** Machine stitching.

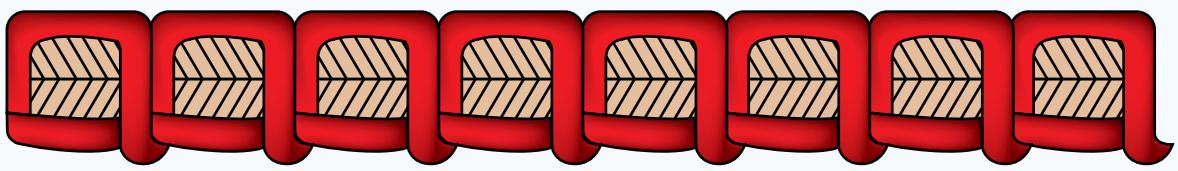

Sewing Machine Table

**Figure 15.** Machine stitching.

## Appendix 4

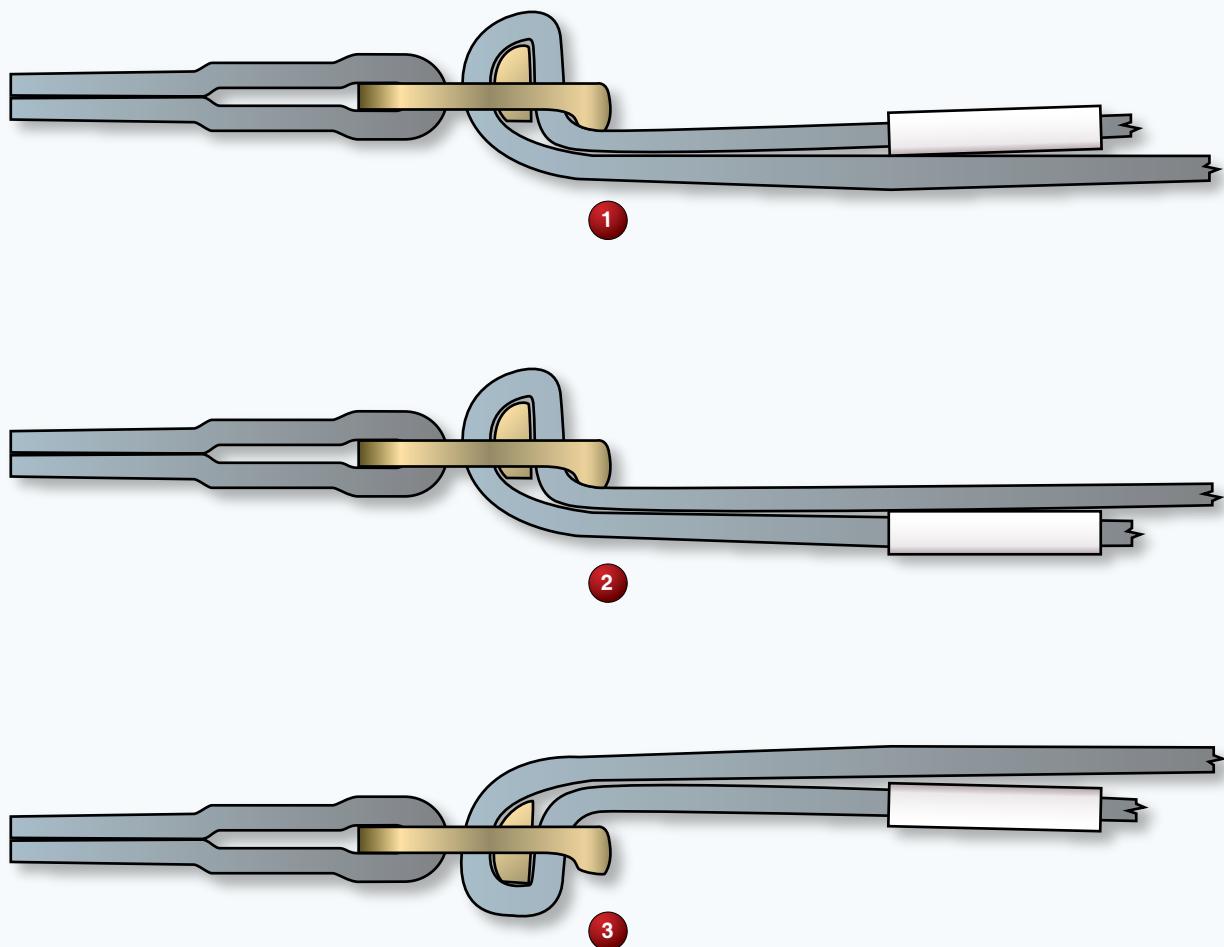

**Figure 16.** Hardware threading.

