



U.S. Department of
Transportation

Federal Aviation
Administration

Advisory Circular

Subject: Airport Snow and Ice Control
Equipment

Date: DRAFT
Initiated by: AAS-100

AC No: 150/5220-20A
Change:

1. **Purpose.** This advisory circular (AC) provides guidance to assist airport operators in the procurement of snow and ice control equipment for airport use.
2. **Cancellation.** This AC cancels AC 150/5220-20, dated 6/30/1992.
3. **Vehicle movement coordination.** Vehicle movements on airport operational areas shall be conducted in accordance with 14 Code of Federal Regulations (CFR) Part 139.329 and appropriate provisions of AC 150/5200-30, Airport Winter Safety and Operations. To help minimize the potential for runway incursions, see Airport Cooperative Research Program (ACRP) Synthesis #12, Preventing Vehicle – Aircraft Incidents during Winter Operations and Periods of Low Visibility, for guidance in the areas of but not limited to communications, fatigue, and operational protocols.
4. **Application.** The Federal Aviation Administration (FAA) recommends the standards and recommendations in this AC for use in the purchase of snow removal and ice control equipment. In general, use of this AC is not mandatory. The standards and recommendations contained in this AC may be used by certificated airports to satisfy specific requirements of Title 14 CFR Part 139, Certification of Airports, subparts C (Airport Certification Manual) and D (Operations). Use of this AC is mandatory for all projects funded with federal grant monies through the Airport Improvement Program (AIP) and/or with revenue from the Passenger Facility Charges (PFC) Program. See Grant Assurance No. 34, Policies, Standards, and Specifications, and PFC Assurance No. 9, Standards and Specifications.
5. **Use of metrics.** Throughout this AC, customary English units are used followed with “soft” (rounded) conversion to metric units. The English units govern.

Michael J. O'Donnell
Director of Airport Safety and Standards

This page intentionally left blank.

TABLE OF CONTENTS

Chapter 1.	Overview	1
1-1	Background.....	1
1-2	Classification of Snow and Ice Control Equipment.....	1
1-3	Selection Process.	2
1-4	Runway Friction Testing Equipment.....	2
1-5	In-Pavement Temperature Sensors and Mobile Pavement Temperature Sensors. .	2
1-6	Automated Weather Support for Deicing Decision Making (WSDDM) System...	2
1-7	Use of SAE ARP Specifications.....	3
1-8	Variable Use of Equipment.....	3
1-9	Certification.....	3
Chapter 2.	Selection Process for Various Snow Removal and Ice Control Equipment	5
2-1	Selection Process.....	5
2-2	Step 1 - Determination of Priority 1 Paved Areas.....	5
2-3	Minimum Snow Removal and Ice Control Equipment Requirements.....	6
2-4	Selecting a High-Speed Rotary Plow for Commercial and Non-Commercial Service Airports.....	8
2-5	Selecting a Snow Plow Cutting Edge (Length) for Commercial and Non-Commercial Service Airports.....	11
2-6.	Selecting a Dry Material Spreader.....	18
2-7	Selecting a Liquid Material Spreader.....	22
2-8.	Selecting an Airport Runway Broom with Airblast.....	22
Chapter 3.	High-Speed Rotary Plows.....	23
3-1	Description.....	23
3-2	High-Speed Rotary Plow Capacities.....	23
3-3	SAE ARP Equipment Specification For High-Speed Rotary Plows.....	23
Chapter 4.	Snow Plows	27
4-1	Description.....	27
4-2	Snow Plow Uses.....	27
4-3	SAE ARP Equipment Specification for Snow Plows and Carrier Vehicles.....	28
Chapter 5.	Material Spreaders	31
5-1	Description.....	31
5-2	Types of Material Spreaders.....	31
5-3	SAE ARP Equipment Specification for Material Spreaders.....	31
Chapter 6.	Airport Runway Brooms.....	35
6-1.	Description.....	35
6-2.	Types of Airport Runway Brooms.....	35
6-3	Classification.....	35
6-4.	SAE ARP Equipment Specification for Airport Runway Brooms with Airblast.....	36

Chapter 7.	Types of Carrier Vehicles.....	41
7-1	Description.....	41
7-2.	Carrier Vehicle Dimension.	42
7-3	Outdoor Storage of Carrier Vehicles.	42
7-4.	SAE ARP Equipment Specification for MTE Dedicated Carrier Vehicles.....	42
Chapter 8.	Operational Standards and Compliance Testing.....	47
8-1	General.....	47
8-2	Required Carrier Vehicle Tests.....	47
8-3	High-Speed Rotary Plow Test.	48
8-4	Snow Plow Test.	48
8-5	Dry and Liquid Material Spreader Tests.....	49
8-6	Airport Runway Brooms with Airblast.....	49
Appendix 1 -	Specification for Carrier Vehicle.....	51
Appendix 2 -	Optional/Alternate Equipment Specification.....	55
Appendix 3 -	High-Speed Rotary Plow Specification.....	59
Appendix 4 –	Snow Plow Specification.....	61
Appendix 5 -	Material Spreader Specification.....	63
Appendix 6 -	Airport Runway Broom with Airblast Specification.....	67

LIST OF FIGURES

Figure 2—1.	Priority 1 paved area example.....	5
Figure 2—2.	High-speed rotary plow calculations for airports with commercial service.....	10
Figure 2—3.	High-speed rotary plow calculations for airports with non-commercial service ...	11
Figure 2—4.	Snow removal (tons/hr) for airports with commercial service as related to Priority 1 paved area	13
Figure 2—5.	Snow removal (tons/hr) for airports with non-commercial service as related to Priority 1 paved area	14
Figure 2—6.	Effective snow plow blade length related to snow displacement.....	16
Figure 2—7	Effective versus actual snow plow blade length.....	17
Figure 2—8.	Hopper capacity – sand	20
Figure 2—9.	Hopper capacity – urea.....	21
Figure 3—1.	Single-stage rotary plow.....	24
Figure 3—2.	Two-stage rotary plow.....	25
Figure 3—3.	Typical rotary plow types.....	26
Figure 4—1.	Snow plow components.....	29
Figure 4—2.	Different types of snow plows.....	30
Figure 5—1.	Dry material spreader types.....	33

Figure 5—2. Example of one design and component layout of a dry material spreader.....	34
Figure 6—1. Typical airport runway brooms	37
Figure 6—2. Towed type airport runway broom	38
Figure 6—3. Common types of broom bristles used on airports.....	39

LIST OF TABLES

Table 2-1. Itemized Priority 1 paved areas	6
Table 2-2. Equipment selection criterion for non-commercial service airports	7
Table 2-3. High-speed rotary plow performance	8
Table 2-4. Determining the class and number of high-speed rotary plows	9
Table 2-5. Weight to volume relationship of sand and urea	19
Table 7-1. MTE specification selections	43

This page intentionally left blank.

Chapter 1. Overview

1-1 Background.

Runways and taxiways should be maintained, if possible, to a “no worse than wet” condition during inclement winter storm weather. To meet this challenge, the purchase of snow and ice control equipment will not only require significant financial commitments, but also require careful planning. This advisory circular (AC) provides airport operators a selection process for snow removal and ice control equipment.

a. Selection Process. The selection process involves three components: (1) identifying the type of equipment for a specific task, (2) determining the number of such equipment, and (3) using the recommended equipment specification to better ensure the equipment performs the required task.

b. Selection Components. The first component uses the appendices in this AC that provide a general template of what the desired equipment should perform (task) and other relative operational information. The second component requires the airport operator to determine: (1) the total square footage of the most critical paved areas of the aircraft operational area and supporting paved facilities, such as paved areas required by the airport rescue and firefighting service, deemed necessary for viable and safe aircraft operations during winter storm events, and (2) the airport’s classification as either a commercial service airport or a non-commercial service airport. Some equipment will require additional computations to determine the number of such equipment, such as high-speed rotary plows and snow plows. In such cases, this AC provides graphical tables to make such computations. The third component is based, to a large extent, on manufacturer equipment specifications. However, to minimize the amount of variation among the various piece of equipment and carrier vehicles to perform specific tasks, this AC references Aerospace Recommended Practice (ARP) specifications for snow and ice control equipment that were developed by the Society of Automotive Engineers (SAE), Aerospace Division.

c. Federal Aviation Administration (FAA) Equipment Goal. Another goal by this AC for referencing SAE ARPs is to facilitate the purchase by airport sponsors of standard equipment that has been tested (certification) to meet the intended performances and quality of product deemed acceptable to the FAA.

1-2 Classification of Snow and Ice Control Equipment.

This AC classifies snow and ice control equipment according to the specific task(s) that the equipment was designed to perform.

a. This AC discusses high-speed rotary plows, snow plows, solid and liquid material spreaders, airport runway broom with air blast, and carrier vehicles (the prime mover for such equipment). Definitions for each equipment, their components, and performance measures are found in the recommended SAE ARP equipment specifications.

b. Chapter 7 describes the most common types of carrier vehicles used by today's industry. This AC categorizes carrier vehicles as either a conventional carrier vehicle or a dedicated carrier vehicle. The latter category is a carrier vehicle exclusively built (integrated) to have the capability to perform multi-tasks namely snow plowing, brooming, and airblast at a minimum at high speeds of at least 30 mph (48 km/h). Industry refers to the latter category as multi-task equipment (MTE) and defined by SAE ARP 5588, Multi-Tasking Equipment (MTE) for Airfield Snow Removal High Speed, Multi-Tasking Snow Removal Unit to include Carrier Vehicle, Snow Plow, Rotary Broom High Velocity Air.

1-3 Selection Process.

a. Step 1 - The first step is for the airport operator to determine the total square footage of the most critical paved areas of the aircraft operational area and supporting paved facilities, such as paved areas required by the airport rescue and firefighting service, deemed necessary for viable and safe aircraft operations during winter storm events. This critical paved area establishes the "Priority 1" response effort for the airport operator. Guidance for prioritizing paved areas and facilities is found in AC 150/5200-30, Airport Winter Safety Operations.

b. Step 2 - Once the Priority 1 paved area is designated, the airport operator should determine the Airfield Clearance Time from AC 150/5200-30 according to the airport's classification of either a commercial service airport or a non-commercial service airport. The relationship establishes a specified clearance time for the Priority 1 paved area to be cleared for a range of annual airplane operations. The intent of Step 2 is for an airport operator to have a sufficient amount of snow removal and ice control equipment to clear 1 inch (2.54 cm) of falling snow weighing up to 25 lb/ft³ (400 kg/m³) from Priority 1 areas within a reasonable time to accommodate the documented annual airplane operations.

c. Chapter 2 - Provides examples of this process for the various equipment.

d. Final Step – Equipment Specification(s) - After determining the type of snow removal and ice control equipment, the airport operator should utilize the recommended specifications provided by the AC to develop bid packages.

1-4 Runway Friction Testing Equipment.

Specifications for friction testing equipment used to conduct runway friction surveys during winter operations are found in the AC 150/5200-30 and AC 150/5320-12, Measurement, Construction, and Maintenance of Skid-Resistant Airport Pavement Surfaces.

1-5 In-Pavement Temperature Sensors and Mobile Pavement Temperature Sensors.

Specifications for in-pavement temperature sensors and mobile pavement temperature sensors are found in AC 150/5200-30.

1-6 Automated Weather Support for Deicing Decision Making (WSDDM) System.

The specification for WSDDM systems is found in AC 150/5200-30.

1-7 Use of SAE ARP Specifications.

The SAE ARP equipment specifications in this AC can be used individually or in combination with one another. For example, an airport operator desiring to acquire a self-propelled high-speed rotary plow can use a single SAE ARP specification that prescribes both the high-speed rotary plow and the carrier vehicle within the same specification. On the other hand, an airport operator desiring to acquire a snow plow, carrier vehicle, plus a towed-behind airport broom with air blast would use more than one SAE ARP specification. To assist the airport operator in this process, this AC provides appendices for the various pieces of equipment for bid purchasing.

1-8 Variable Use of Equipment.

Depending upon winter conditions, a snow plow supported by an airport runway broom may be all that is required to keep an airport open to traffic. At other airports, more diverse equipment may be needed to combat more severe winter conditions. In assessing airport needs, the airport operator must compare the cost/benefit relationship of acquiring a multi-functional piece of equipment offering a number of attachments versus the acquisition of a single unit designed primarily to accomplish one task.

1-9 Certification.

Purchasers of equipment described in this AC should obtain a certification in writing from the manufacturer/vendor that the components constituting the whole of the equipment being supplied to the airport operator comply with the applicable performance, design, and construction requirements of the referenced specification. This certification is mandatory if the equipment is purchased with Federal funds under the Airport Improvement Program (AIP) or approved under the Passenger Facility Charges (PFC) Program. In both events, a signed copy of the certification must be made part of the equipment documentation.

This page intentionally left blank.

Chapter 2. Selection Process for Various Snow Removal and Ice Control Equipment

2-1 Selection Process.

This chapter explains the selection process for snow removal and ice control equipment which commences with Step 1, the determination of the total Priority 1 paved area. As previously stated, some of the equipment is determined using only the first step while the remaining equipment follows a 2-step process. Both steps apply the same assumption to remove 1 inch (2.54 cm) of falling snow weighing up to 25 lb/ft³ (400 kg/m³) from the Priority 1 paved area within a reasonable time for the airport's determined annual airplane operations (based on commercial service airport or non-commercial service airport). Furthermore, this AC applies an equipment efficiency factor equal to 70 percent. This assumption takes into account the need by such equipment to slow down to change course (for example, approaching the end of a runway to reverse course), back-and-forth clearing operations common on taxi stubs and taxi connectors, and to account for slight snow spillage, slight overlapping of clearing operations, and poor visibility driving conditions (for example, white-out conditions). Lastly, the chapter familiarizes the airport operator in the use of the graphs and tables required by the 2-step process for determining the number of high-speed rotary plows and snow plows. Practical examples illustrate the full selection process.

2-2 Step 1 - Determination of Priority 1 Paved Areas.

The following example illustrates how to determine the total Priority 1 paved area using Figure 1-1 of AC 150/5200-30C. It is important to recognize that the airport operator determines which critical paved areas are deemed adequate for viable and safe aircraft operations during winter storm events. Figure 2-1 illustrates this fact where it was determined that not all taxi routes needed plowing.



Figure 2—1. Priority 1 paved area example

Example: An airport operator of a commercial service airport receiving more than 30 inches of snow annually and having an annual activity level of 35,000 operations needs to determine the types and number of snow and ice control equipment necessary to clear the Priority 1 paved area. In accordance with AC 150/5200-30 a reasonable clearance time is 1 hour for this level of annual airplane operations. The airport for this example is shown in Figure 1-1 of AC 150/5200-30.

Step 1: Apply paragraph 1-4(a) of AC 150/5200-30 to assist in designating critical paved areas as Priority 1. For this airport, Table 2-1 itemizes the critical paved areas with the Priority 1 total square footage.

Table 2-1. Itemized Priority 1 paved areas

Critical Priority 1 paved areas to be cleared	
Location	Paved Area (square feet)
Main runway (9000 ft × 150 ft)	1,350,000
Parallel Taxiways (9000 ft × 75 ft)	675,000
4 Taxiway/Runway connectors	107,812
Taxi Fillets	20,000
Airport Rescue and Fire Fighting station apron and emergency roads	20,000
Terminal Apron	600,000
Centralized Aircraft Deicing Facility (Northside)	259,000
TOTAL Priority 1 paved area to be cleared	3,031,812
Note: For equipment selection purposes, the paved area may be rounded upwards to 3,100,000 ft ² (288,150 m ²).	

2-3 Minimum Snow Removal and Ice Control Equipment Requirements.

The required minimum types and number of snow removal and ice control equipment is based on several factors. Two parameters, namely the total square footage of the Priority 1 paved area and the airport's service classification, determine the types and number of airport runway brooms, solid material spreaders, and liquid material spreaders. On the other hand, selection of high-speed rotary plows and snow plows require the parameter of tonnage of snow to be removed in a given time in addition to other unique parameters required by the equipment. For example, what is the minimum casting distance of removed snow from the high-speed rotary plow? What is the angle of attack of the snow plow's cutting edge relative to the direction of travel? If snow plows support a high-speed rotary plow, what is the operational speed of the clearing operation? Because high-speed rotary plows dictate the general clearing operation, supportive snow plows are selected with the condition that they match the speed and the snow removal capacity (tonnage per hour) of the high-speed rotary plow. The selection of some types of winter related equipment is not based on any of these parameters. For example, runway friction testers and in-pavement temperature sensors are directly related to runway surface characteristics before and after clearing operations or/and the completion of sand or deicing/anti-icing chemical applications.

a. Commercial Service Airports. For commercial service airports that provide scheduled air carrier service, at least one high-speed rotary plow is recommended. This high-speed rotary plow should be supplemented with at least two snow plows having equal snow removal capacity. In addition to this tandem grouping, for each 750,000 ft² (70,000 m²) of pavement area declared as Priority 1, one towed or self-propelled airport runway broom with air-blast and one solid material spreader for sand and/or one solid deicing/anti-icing for chemical application is recommended. If a liquid deicing/anti-icing chemical is used in lieu of, or in addition to, the usage of a solid deicing/anti-icing chemical, a minimum of one liquid deicing/anti-icing chemical spraying vehicle is recommended. Paragraphs 2-4 and 2-5 provide the selection criteria to determine the number and types of high-speed rotary plows and snow plows by using a second step.

b. Non-commercial Service Airports. For non-commercial service airports with over 10,000 operations and at least 15 inches (0.38 m) of snow should have a minimum of one high-speed rotary plow supported by two snow plows of equal snow removal capacity. For non-commercial service airports with over 10,000 operations that experience an annual snowfall of less than 15 inches (0.38 m), a minimum of one snow plow should be provided. For non-commercial service airports having 10,000 or fewer annual operations that experience more than 30 inches (0.76 m) of snow should have a minimum of one high-speed rotary plow supported by two snow plows of equal snow removal capacity. For non-commercial service airports having 10,000 or fewer annual operations that experience an annual snowfall of 30 inches (0.76 m) or less, a minimum of one snow plow should be provided. Table 2-2 illustrates these selection criteria. Paragraphs 2-4 and 2-5 provide the selection criteria to determine the number and types of high-speed rotary plows and snow plows by using a second step.

Table 2-2. Equipment selection criterion for non-commercial service airports

Minimum high-speed rotary plow and snow plow criteria for Non-commercial Service Airports		
Annual Operations	Annual Snowfall (inches)	Minimum type and number of equipment
10,000 or fewer	30 inches (0.76 m) or less	1 snow plow
	more than 30 inches (0.76 m)	1 high-speed rotary plow supported by 2 snow plows
over 10,000	15 inches (0.38 m) or more	1 high-speed rotary plow supported by 2 snow plows
	Less than 15 inches	1 snow plow

Note: Table is read from left to right to determine the minimum type and number of plow equipment

c. Other Supporting Equipment. Other types of supportive equipment such as front-wheel loaders or ice-melters may be needed to assist in the removal of snow from all non-critical, remaining operational areas including secondary taxiways or low priority ramp aprons. Such paved areas are classified as Priority 2 or Priority 3 areas under AC 150/5200-30.

2-4 Selecting a High-Speed Rotary Plow for Commercial and Non-Commercial Service Airports.

High-speed rotary plows, also called “rotaries” or “snowblowers,” are primarily used to cast heavy concentrations of plowed snow away from airport operational areas such as runways and taxiways. The selected high-speed rotary plow(s) should be capable of removing the volume of snow from the Priority 1 paved area with a pre-determined casting distance to comply with runway and taxiway snow bank clearance criteria in AC 150/5200-30. This equipment, which may be self-propelled or attached to a conventional carrier vehicle, uses either one or more rotating elements (single or two-stage units) to disaggregate a snowpack. The disaggregated snow is then broken into particles small enough to pass through a casting mechanism having a directional chute. Because of their large capacity, self-propelled high-speed rotary plows are frequently required at medium to large airports while high-speed rotary plows attached to a conventional carrier vehicle may be more appropriate at smaller facilities or facilities whose climate is less severe. Table 2-3 shows the various classes of high-speed rotary plows in terms of casting distance and removal capacity in tons/hour. Casting distance must be measured from the longitudinal centerline of the snow removal unit to the center of mass within the perimeter of the cast pattern.

Table 2-3. High-speed rotary plow performance

High-Speed Rotary Plows			
Size	Class	Casting Distance Feet (m)	Minimum Capacity Tons/hour
Small	I	50 (15.2)	Up to 600
Medium	II	75 (22.9)	1500
Intermediate	III	100 (30.5)	2500
Large	IV	100 (30.5)	3000
Very Large	V	100 (30.5)	4000
		150 (45.8)	3000
Extra Large	VI	100 (30.5)	5000 or more

Example (continued): The airport operator of the same commercial service airport wants to acquire a high-speed rotary plow(s) for the upcoming winter season. For non-commercial service airports, follow the same procedure.

Determine the size and number of high-speed rotary plows needed based on the following airport conditions:

- Annual activity level equals 35,000 operations with a reasonable clearance time of 1 hour for the total Priority 1 paved area.
- Accumulated snow on the runway and taxiways are to be cast at least 100 feet from the rotary when it travels along paved edge. This casting distance sets equipment selection Criterion 1.
- Average runway operating speed of the rotary plow unit is at least 25 mph (40 km/h) to meet the reasonable clearance time of 1 hour and annual airplane operation rate.

- Typical snow density is 25 lb/ft³ (400 kg/m³).

GRAPHICAL SOLUTION

Step 1. Determine the total critical paved area for Priority 1. From paragraph 2-2, Priority 1 was determined as PA = 3,100,000 ft² (288,150 m²).

Step 2. Use of Graphs. Use either Figure 2-2 or Figure 2-3.

Since this example is a Commercial Service Airport, apply Figure 2-2. Enter the graph from the horizontal axis labeled “Square feet of Priority 1 area” with PA = 31 (3,100,000 ft²) and proceed vertically until you intersect the appropriate reference line labeled “10,000 but less than 40,000 annual operations.”

Upon locating this reference line, proceed to the left to intersect the vertical axis which reads “Snow tons per hour × 1000.” This intersection determines the tonnage (volume) of snow to be removed from the total Priority 1 paved area within the reasonable clearance time of 1 hour. In this example, the tonnage = 4,600 tons per hour. The tonnage sets equipment selection Criterion 2.

Equipment Selection: Using the same figure, continue proceeding to the left of the figure with 4,600 tons per hour to pre-select among the various Classes of rotaries and their number. As seen, Class I rotaries are too small while a single Class VI rotary exceeds the tonnage of 4,600 tons per hour. Table 2-4 (read from left to right) summarizes the selection possibilities that account for Criterion 1 (the required casting distance of at least 100 feet) and Criterion 2 (tonnage removal rate of 4,600- to arrive at a final determination).

Table 2-4. Determining the class and number of high-speed rotary plows

Class of high-speed rotary plow	Table 2-1 Preliminary quantity per class	Criterion 1		Criterion 2		Number of rotaries needed
		Casting Distance ft (m)	Remaining candidates	Minimum Capacity tons/hour	Remaining candidates	
I	Too small	-	-	Up to 600	-	-
II	2	75 (22.9)	no	1500	-	-
III	1	100 (30.5)	yes	2500	Yes	2
IV	1	100 (30.5)	yes	3000	No	excessive
V	1	100 (30.5)	yes	4000	No	excessive
	1	150 (45.8)	yes	3000	No	excessive
VI	Too large	-	-	5000 or more	-	-

Selection: In this example, two Class III high-speed rotaries with a total snow removal rate of 5,000 tons/hour were selected. However, a different selection might be made if justified. For example, if the airport plans a near-term (within 5 years) runway extension including the standard parallel taxiway and connectors, then two Class IV or two Class V rotaries or

combinations of with Class II rotaries may be warranted to achieve a snow removal rate of 6,000 tons/per hour.

Upon determining the rotary class and number of rotaries, see Chapter 3 for selection models and the recommended SAE ARP equipment specification for purchasing, testing, and certifying high-speed rotary plows.

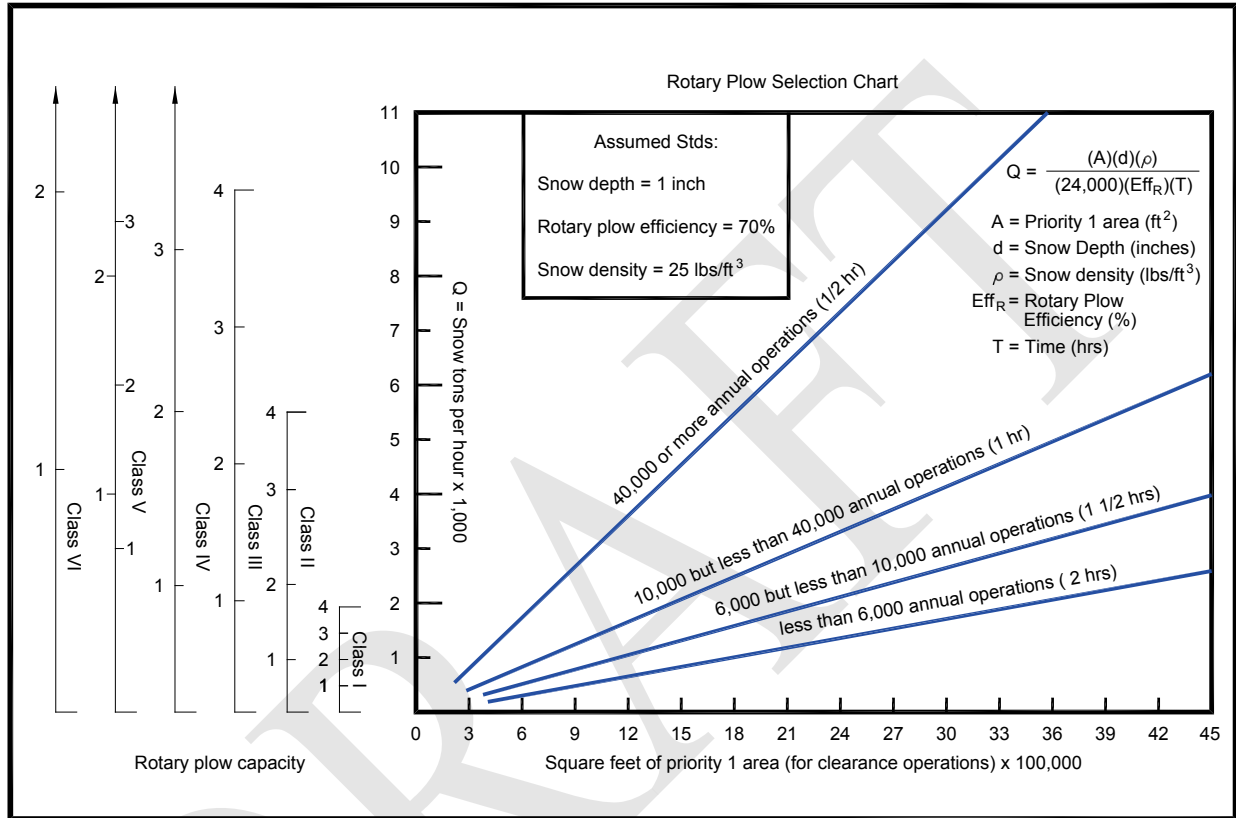


Figure 2—2. High-speed rotary plow calculations for airports with commercial service

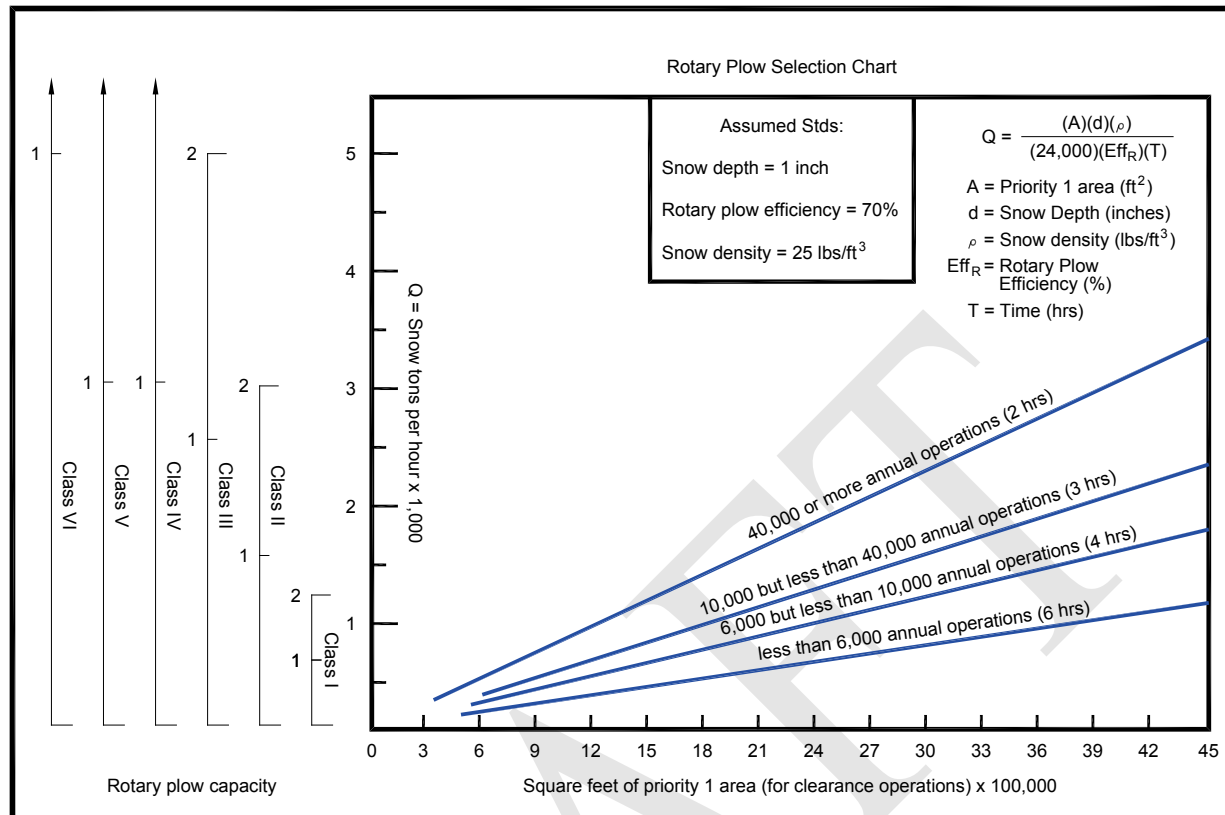


Figure 2—3. High-speed rotary plow calculations for airports with non-commercial service

2-5 Selecting a Snow Plow Cutting Edge (Length) for Commercial and Non-Commercial Service Airports.

Snow plows consist of a cutting edge to shear snow from the pavement, and a moldboard to lift and cast the dislodged snow to the side of the cleared path. The cutting edge may ride in contact with the pavement or be held a small distance above it by means of shoes or caster wheels. A complete snow plow unit consists of the snow plow, a carrier vehicle (conventional or dedicated), hitch, and other accessories (see Figure 4-1). Snow plow sizes are classified in Chapter 4. The following selection process determines the overall length of the cutting edge, termed, “actual cutting edge.” With the exception of bullnose clearing operations, the cutting edge is tilted to produce smaller cleared paths than bullnosing. This reduction in the actual length of the cutting edge is referred to as the “effective cutting edge.” It should be pointed out that the process of selecting a snow plow cutting edge is not an exact science and that different manufacturers may suggest alternative selection approaches tailored to their blade types and equipment, but the results should essentially be the same.

Example (continued): The airport operator of the same commercial service airport wants to acquire snow plow(s) to support the high-speed rotaries for the upcoming winter season.

Determine the actual length of the total cutting edge and number of carrier vehicles to carry the single or subdivided actual length. Base the determination on the following airport conditions:

- Annual activity level equals 35,000 operations with a reasonable clearance time of 1 hour for the total Priority 1 paved area.
- Average runway operating speed of the snow plow unit is at least 25 mph (40 km/h) to meet the reasonable clearance time of 1 hour and annual airplane operation rate.
- Typical snow density is 25 lb/ft³ (400 kg/m³) - industry accepted standard.
- Cutting angle of the blade will be set at 35 degrees.
- The efficiency of the snow plow matches the high-speed rotary plow at 70 percent.

GRAPHICAL SOLUTION

Step 1: Determine the total critical paved area for Priority 1. From paragraph 2-2, Priority 1 was determined as $Q = 3,100,000 \text{ ft}^2$ (288,150 m²).

Step 2: Use of Graphs (three graphs are used.) Start with Figure 2-4 to determine the tonnage of snow removal per hour. Follow the same procedure for non-commercial service airports by using Figure 2-5.

Enter the graph from the horizontal axis labeled “Priority 1 Paved Area” with PA = 3.1 (3,100,000 ft²) and proceed vertically until you intersect the appropriate reference line labeled “Time: 1 hour” which is a reasonable clearance time for this Commercial Service Airport with 10,000 to 40,000 annual operations.

Upon locating the “Time: 1 hour” reference line, proceed to the left to intersect the vertical axis which reads “Q Snow displacement (tons/hr).” This intersection determines the tonnage (volume) of snow to be cleared from the entire Priority 1 paved area within the recommended clearance time of 1 hour. In this example, $Q = 4,600$ tons per hour.

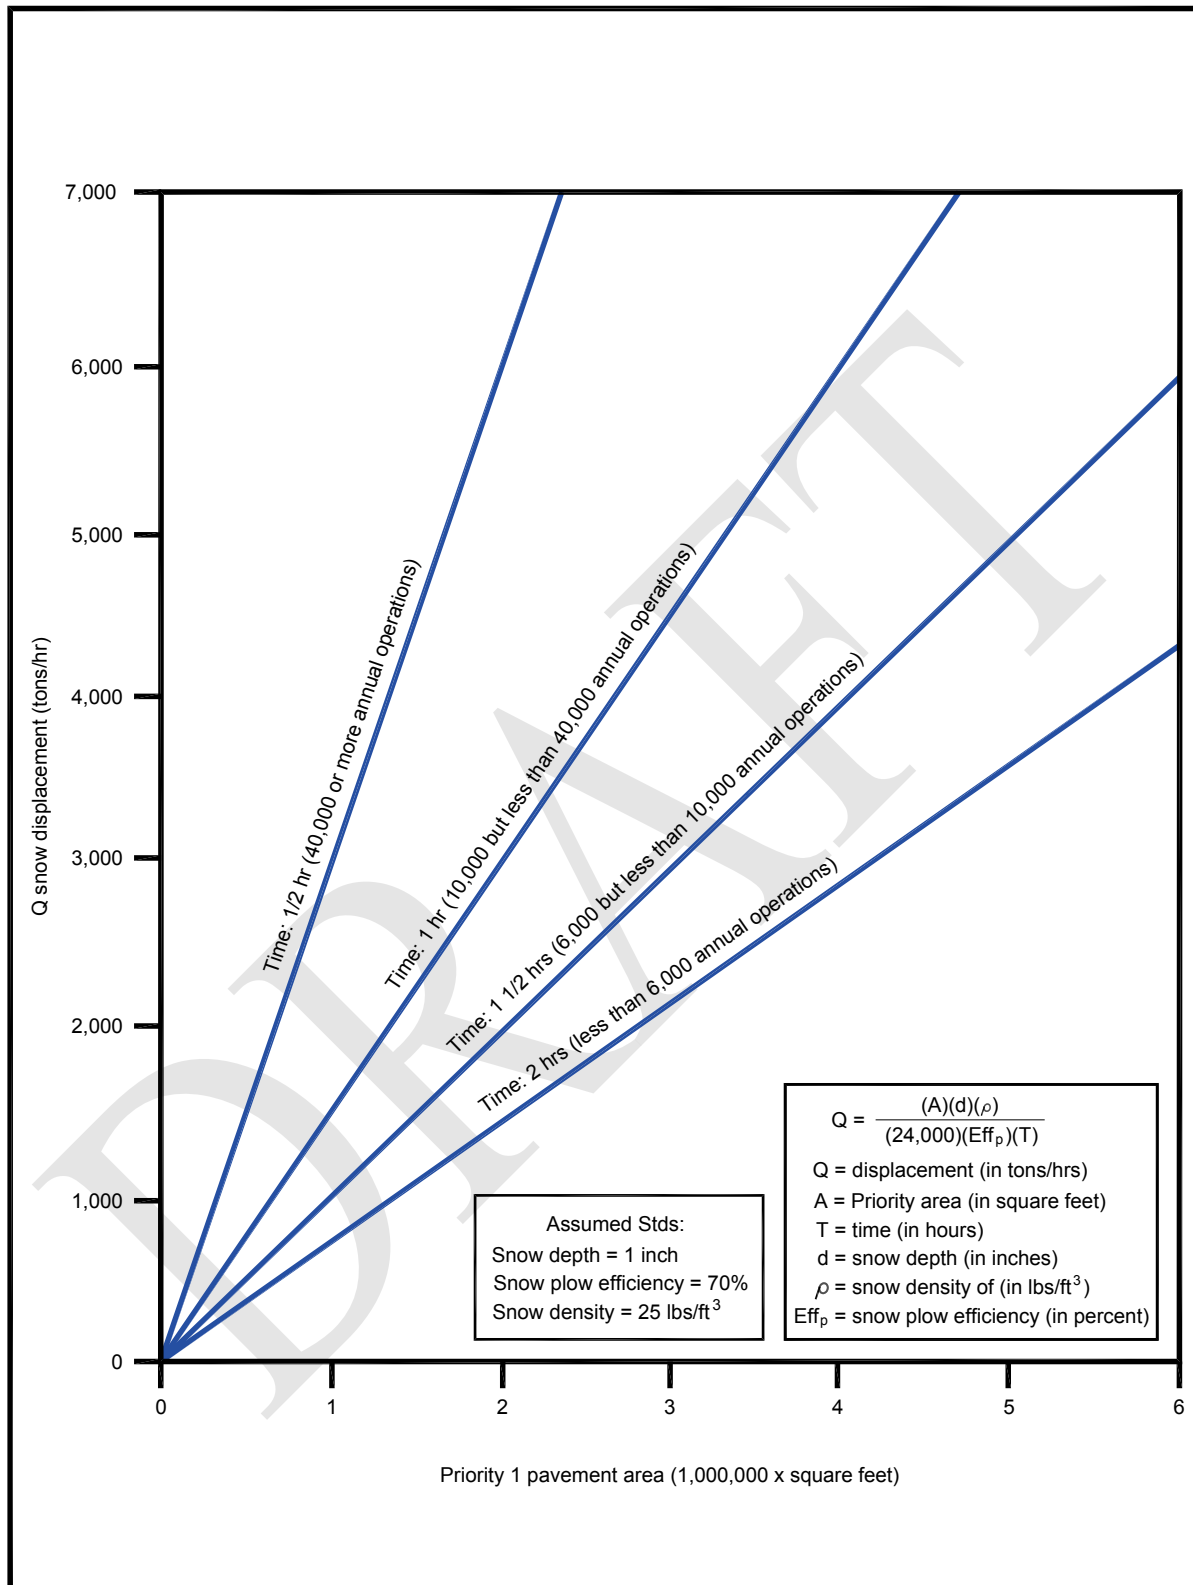


Figure 2—4. Snow removal (tons/hr) for airports with commercial service as related to Priority 1 paved area

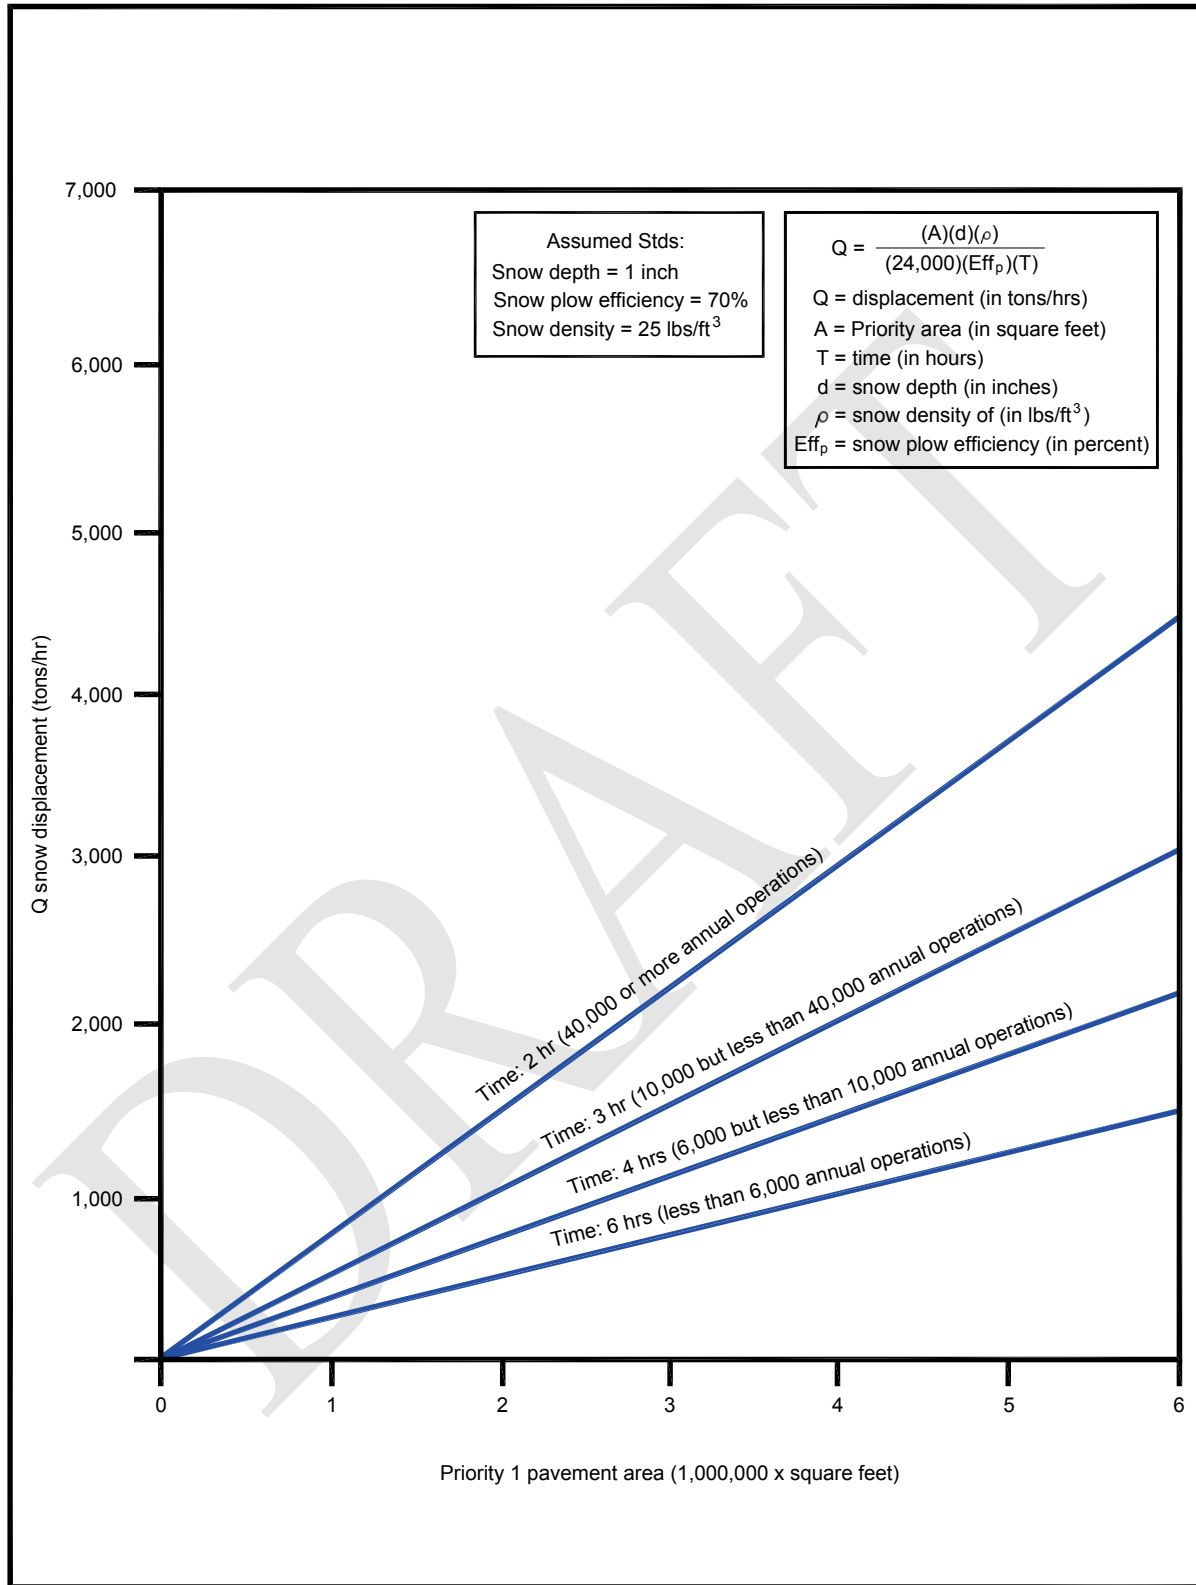


Figure 2—5. Snow removal (tons/hr) for airports with non-commercial service as related to Priority 1 paved area

Step 3: Enter Figure 2-6 to determine the length of the snow plow's "effective" cutting edge at the required minimum operating speed at 25 mph (40 km/h).

Enter the graph from the horizontal axis labeled "snow displacement (tons/hr)" with 4,600 tons/hr and proceed vertically until you intersect the appropriate reference line labeled "V = 25 mph."

Upon locating the "V = 25 mph" reference line, proceed to the left to intersect the vertical axis which reads "effective cutting edge." This intersection yields 33.5 feet (10.2 m).

DRAFT

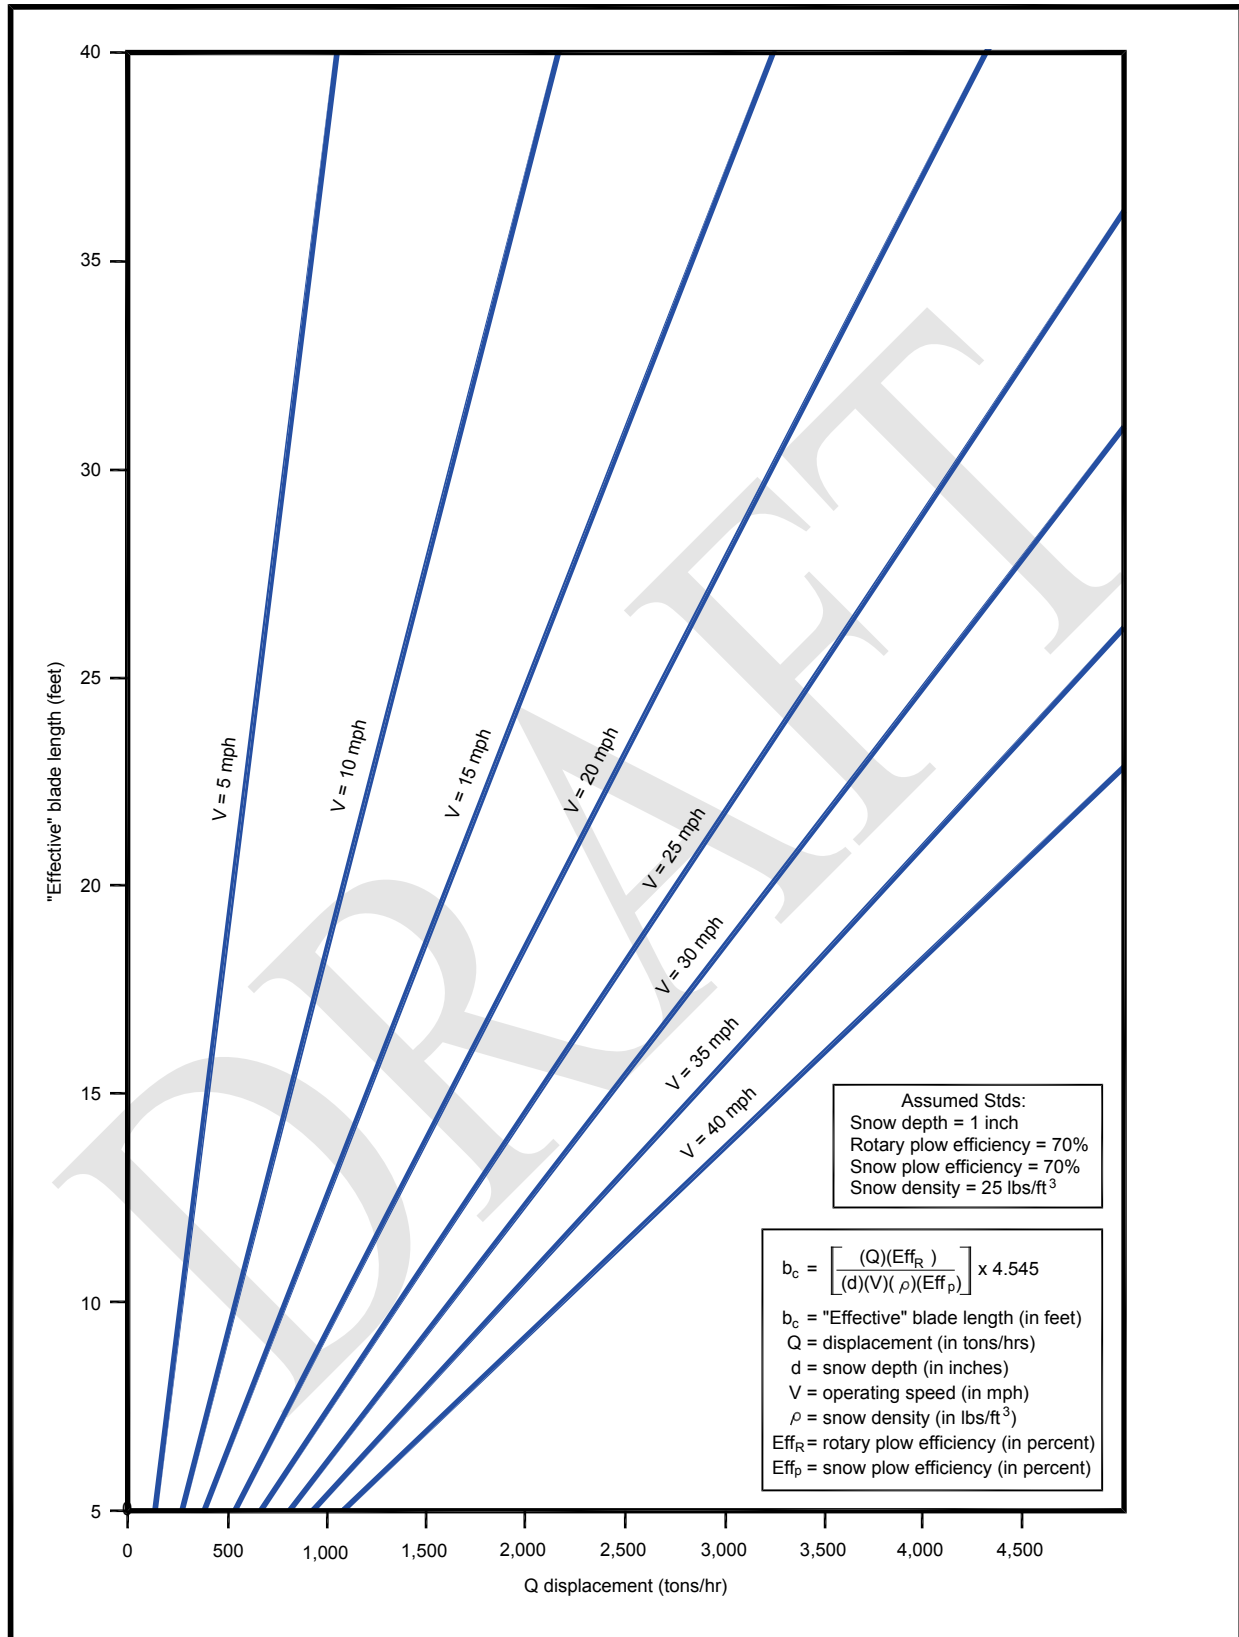


Figure 2—6. Effective snow plow blade length related to snow displacement

Step 4: Determine the “actual” length of the cutting edge to be purchased by using Figure 2-7.

Enter the horizontal axis which reads “Effective blade length” with 33.5 feet (10.2 m). Proceed vertically to the appropriate reference line reading “cutting angle 35°.” At this intersection, proceed to the left to intersect the vertical axis to read 41 feet.

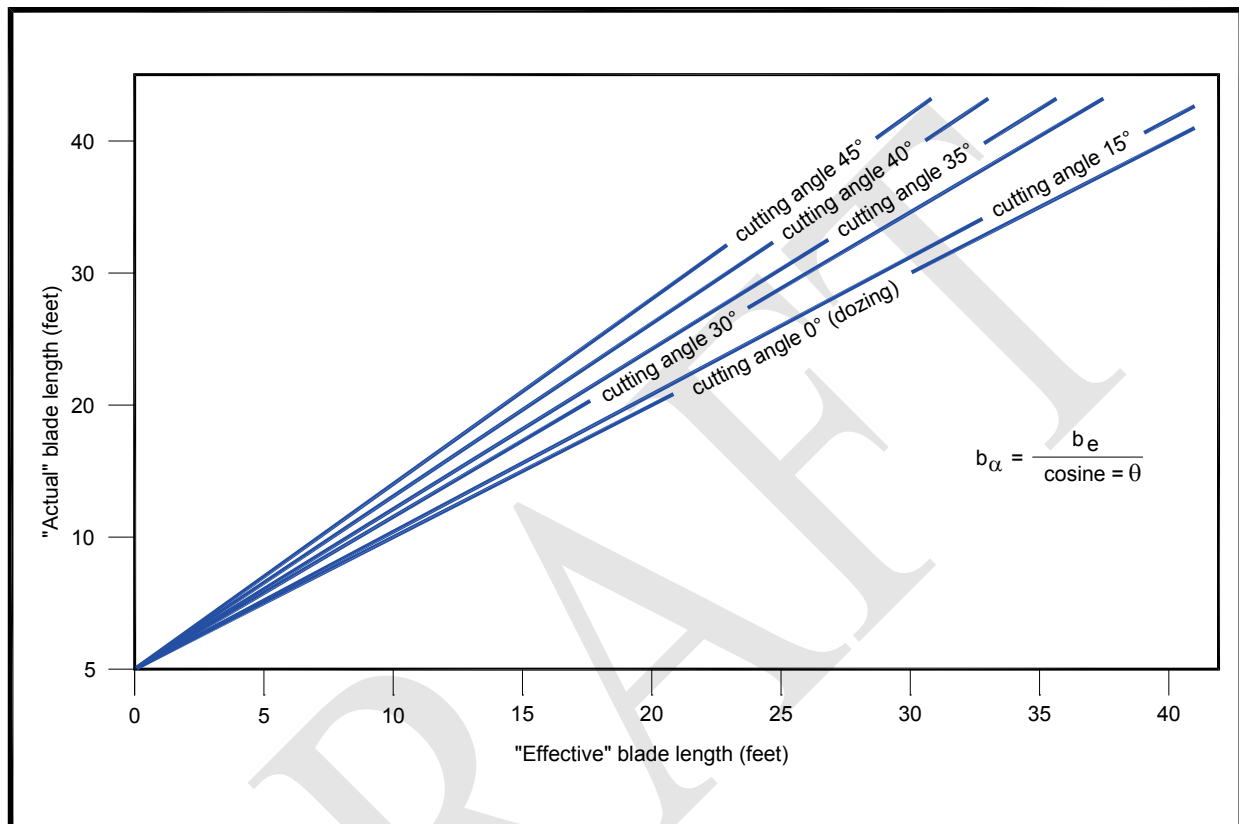


Figure 2—7 Effective versus actual snow plow blade length

Selection: Selection criterion for snow plows supporting a rotary plow is 2 snow plows for each rotary plow. Hence four snow plows should be obtained with separate carrier vehicles. **Note:** If the airport is not in a snow region that does not receives sufficient annual snowfall for a high-speed rotary plow, then the airport operator should select 2 snow plows with 20-foot and 22-foot cutting edges.

CAUTION:

Snow plows that support high-speed rotary plow(s) must match the travelling speed of the rotary and match or exceed the snow removal capacity of the rotary.

Upon determining the length and number of snow plows, see Chapter 4 for selection models and the recommended SAE ARP equipment specification for purchasing, testing, and certifying snow plows.

2-6. Selecting a Dry Material Spreader.

Dry material spreaders shall be selected based on hopper capacity and by the ability to apply material in a uniform distribution pattern to a prescribed surface area (swath) at a predetermined application rate. A conventional slide-on spreader is adequate for most airport applications of dry chemicals and sand. Special requirements, such as a need to haul bulk sand from a supplier, may justify alternative or multi-purpose types of spreaders, e.g., a tailgate spreader coupled with a dump truck body.

a. Hopper Capacity. Hopper capacity is determined by the material or combination of materials to be spread, the rate of application, and the paved area including the swath to be covered. Figures 2-8 and 2-9 show the weight/volume (left and right vertical scales) relationship among sand and airside urea. Deicer manufacturers should provide the airport operator their particular chart and recommended application rate to determine hopper capacities.

b. Application Rate. Airport operators should follow material manufacturers' recommended application rates for their products.

Example: An airport operator intends to apply two different dry materials using one hopper. The first treatment is an application of airside urea to a 6000-foot (1,830 m) runway using a single 75-foot (23 m) swath at a rate of 2.0 ounces/yd² (68 g/m²). The final treatment is an application of dry, heated sand to the same runway and swath but at a rate of 4.0 ounces/yd² (136 g/m²). What is the hopper capacity of the dry material spreader needed to treat the runway surface? Since two different materials are to use the same hopper, determine and select the largest hopper capacity.

GRAPHICAL SOLUTION

Step 1: Determine the volume and weight of airside urea. Enter Figure 2-9 for airside urea along the horizontal axis with 6,000-foot runway length by 75-foot width (swath path). Proceed vertically to the intersection with the appropriate reference line labeled "application rate 2.0 ounces per square foot." Proceed to the left to intersect the vertical axis labelled "Weight" to read 6,200 pounds (2,820 kg). Proceed to the right to intersect the vertical axis labelled "Hopper Capacity" to read 4.9 yd³ (3.7 m³). Notice that this chart applies to a 75-foot treated swath. Hence, if the airport operator wishes to treat the entire runway, which measures 150-feet, use the "Adjustment Factor" table within the chart to multiple the result for the 75-foot swath with the adjustment factor. For example, a runway width of 100 feet (30 m), the hopper capacity is 4.9 yd³ (answer) \times 1.3 = 6.37 yd³ (4.9 m³).

Step 2: Determine the volume and weight of dry, heated sand. Enter Figure 2-8 for sand along the horizontal axis with 6,000-foot runway length by 75-foot width (swath path). Proceed vertically to the intersection with the appropriate reference line labeled "application rate 4.0 ounces per square yard." Proceed to the left to intersect the vertical axis labelled "Weight" to read 13,000 pounds (5,900 kg). Proceed to the right to intersect the vertical axis labelled "Hopper Capacity" to read 4.2 yd³ (3.2 m³).

Table 2-5. Weight to volume relationship of sand and urea

Weight/Volume Relationship of Sand and Urea		
	Weight of Material	Volume of Material
Sand	13,000 lbs. (5,900 kg) heaviest	4.2 yd ³ (3.2 m ³)
Airside Urea	6,200 lbs. (2,815 kg)	4.9 yd ³ (3.7 m ³) largest

Selection: Select a hopper capacity of at least 5.0 cubic yards to accommodate the largest volume namely, airside urea, see Table 2-5. With this information the airport operator can contact spreader manufacturers for acceptable type(s) and size(s). **Note:** In selecting the size of a spreader unit, the location of the dry material storage bins/silos and the time it takes to reload the hopper(s) with material must also be considered in the decision-making process.

Upon determining the largest hopper capacity and heaviest weight of material being spread, see Chapter 5 for selection models and the recommended SAE ARP equipment specification for purchasing, testing, and certifying dry material spreaders.

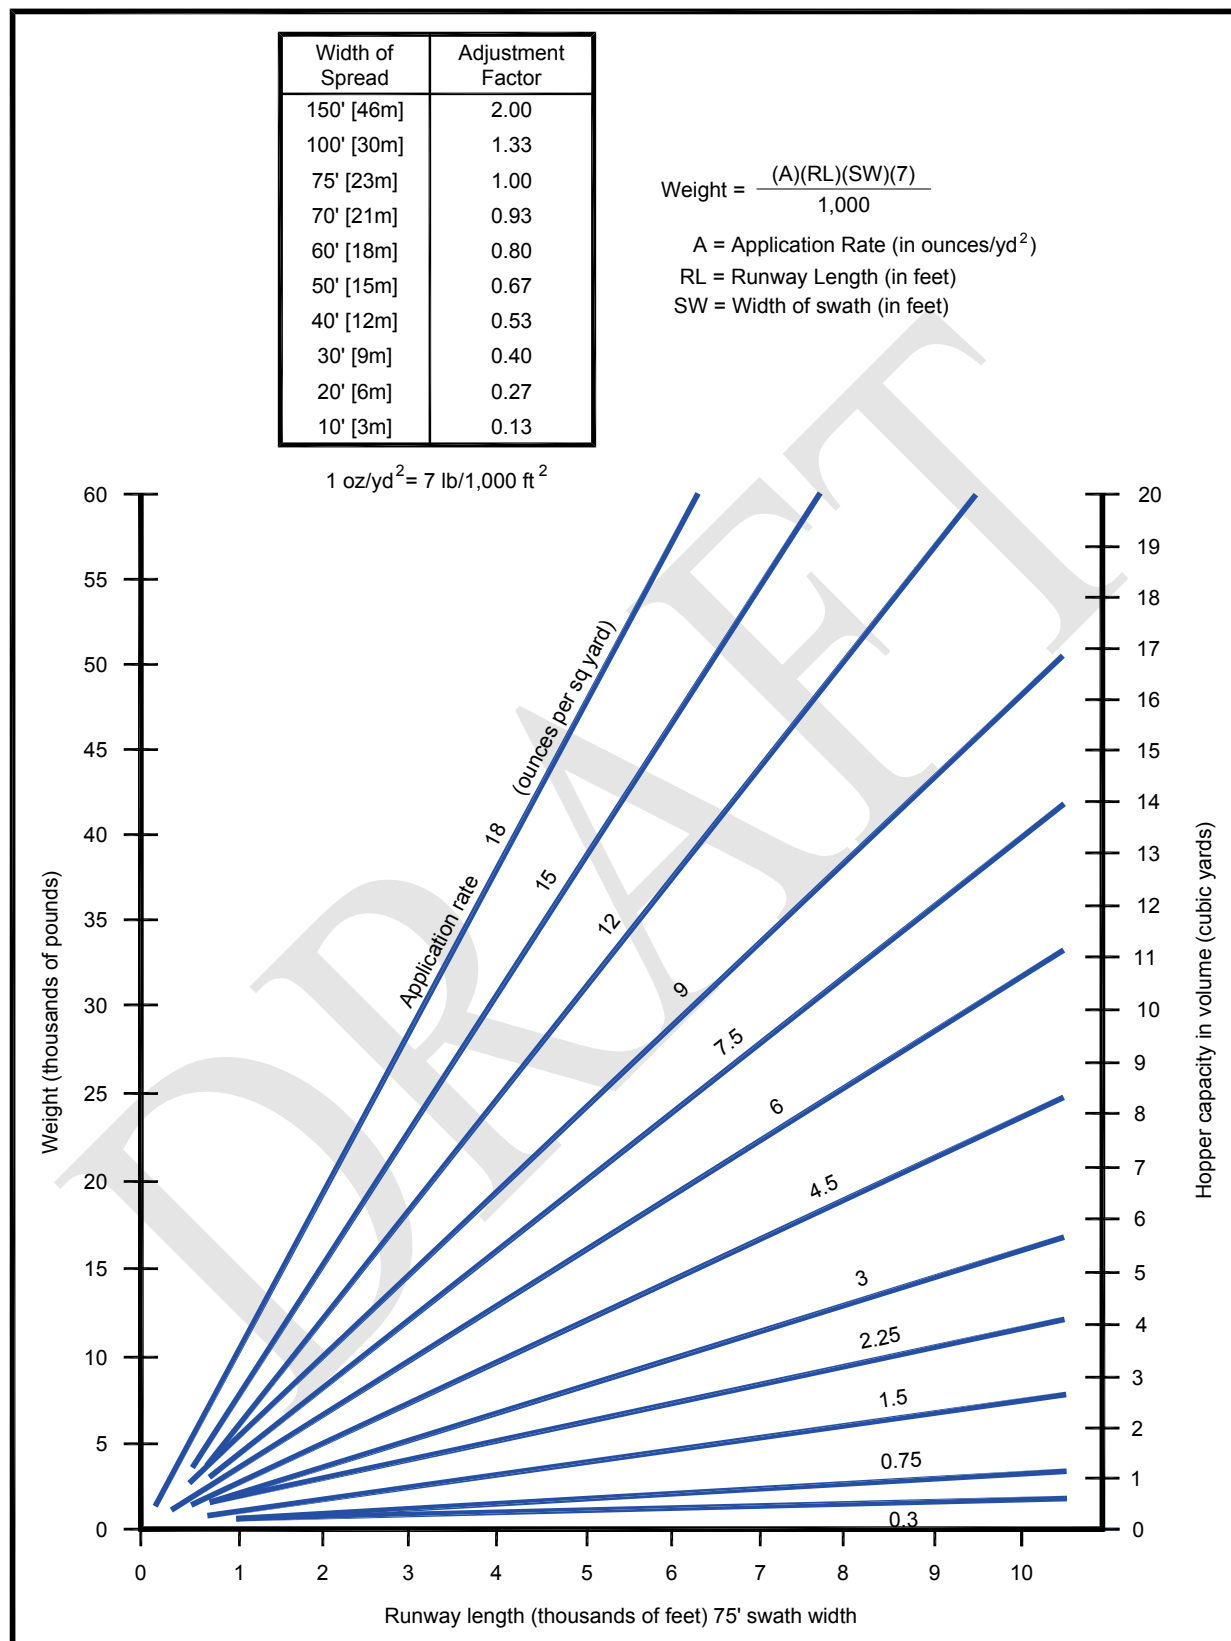


Figure 2—8. Hopper capacity – sand

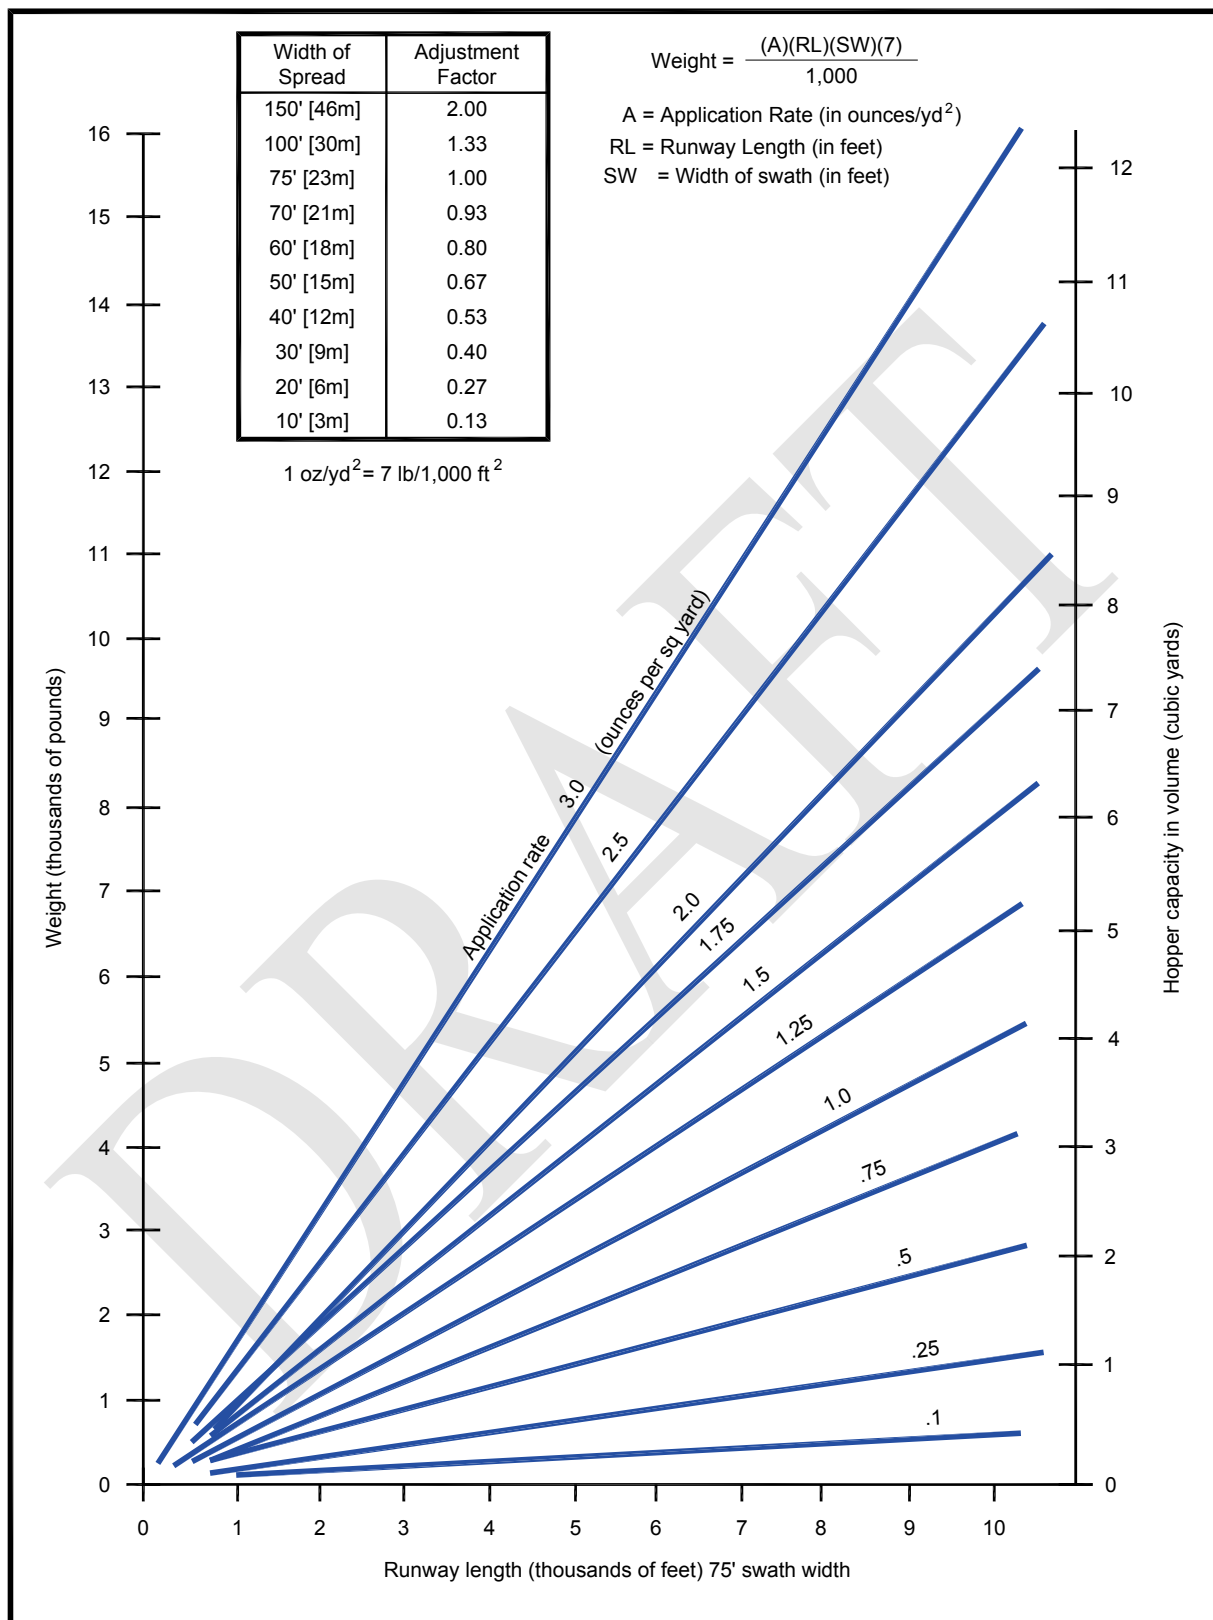


Figure 2—9. Hopper capacity – urea

2-7 Selecting a Liquid Material Spreader.

Liquid material spreaders shall be selected based on tankage capacity and by the ability to apply material in a uniform distribution pattern to a prescribed surface area (swath) at a predetermined application rate. In contrast to dry sand, application rates of de/anti-icer fluids vary depending on ice and snow accumulations and overall weather conditions. According to AC 150/5200-30, rates are typically 0.30 gal/1,000 ft² (0.01 liter/m²) when anti-icing or 1.0 gal/1,000 ft² (0.04 liter/m²) when deicing. In all cases, refer to the manufacturer's recommended application rates for anti-icing applications and deicing applications. The size of the sprayer tank is a function of the square footage to be covered and the maximum fluid coverage rate to be applied.

Example: Determine the tankage capacity. The airport operator determined that 700,000 ft² (65,000 m²) of Priority 1 paved area will receive a liquid deicer applied (not as an anti-icer) at the manufacturer's recommendation of 1.0 gal/1,000 ft² (0.04 liter/m²). This operation will meet all but the most severe conditions with only one pass of the equipment.

NUMERICAL SOLUTION

Step 1: Determine the total gallons of liquid deicer used.

Multiple as follows:

$$700,000 \text{ ft}^2 \times 1.0 \text{ gal/1,000 ft}^2 = 700 \text{ gals}$$

$$(65,030 \text{ m}^2 \times 0.04 \text{ liter/m}^2 = 2,650 \text{ liters})$$

Selection: Select at least a tank capacity of 700 gallons. **Note:** In selecting the size of a liquid spreader unit, the location of the storage tanks and the time it takes to reload the sprayer with fluid must also be considered in the decision-making process.

Upon determining the tank capacity, see Chapter 5 for selection models and the AC specification for purchasing, testing, and certifying liquid material spreaders.

2-8. Selecting an Airport Runway Broom with Airblast.

The selection process follows the process described per SAE ARP 5564 Airport Runway Brooms, under paragraph 6, in particular paragraph 6.1 and Appendix A.

Chapter 3. High-Speed Rotary Plows

3-1 Description.

High-speed rotary plows, also called “rotaries” or “snowblowers,” are primarily used to cast heavy concentrations of snow away from airport operational areas such as runways and taxiways. The equipment, which may be self-propelled or attached to a carrier vehicle, uses either one or more rotating elements (single or two-stage units) to disaggregate a snowpack. The disaggregated snow is then broken into particles small enough to pass through a casting mechanism and directional chute. Because of their large capacity, self-propelled rotary plows are frequently required at medium to large airports while rotary plows attached to a carrier vehicle may be more appropriate at smaller facilities or facilities where the climate is less severe.

a. Single-Stage High-speed Rotary Plows. Single-stage high-speed rotary plows use one rotating device to accomplish both the disaggregating and the casting functions. Single-stage rotaries may be of any suitable design with either single or dual turbine fans and with or without moveable or fixed side extension wings. Two common designs are the scoop wheel type (see Figure 3-1), which may have a propeller-like pre-cutter bar to break up hard snow, and the drum with turbine impeller type (Figure 3-3g).

b. Two-Stage High-speed Rotary Plows. Two-stage high-speed rotary plows separate the snow gathering or disaggregating function from the casting function (see Figures 3-1 and 3-2). Disaggregators can be of any suitable design, such as a solid auger (single or dual) or ribbon reel (helical). Impellers, which cast the snow, can be of web or disk design.

c. Options. In selecting a high-speed rotary plow design (single-stage or two-stage) to meet the demands of local conditions, an airport operator should consider the various equipment options available to ensure that only the most effective unit is acquired.

3-2 High-Speed Rotary Plow Capacities.

Snow removal capacities and casting distances for various high-speed rotary plow classes are shown in Table 2-3 and may be acquired in either single or two-stage design. Their capacities are in tons/hour and the casting distance shall be measured from the longitudinal centerline of the snow removal unit to the center of mass within the perimeter of the cast pattern. The test shall be conducted when there is no wind.

3-3 SAE ARP Equipment Specification For High-Speed Rotary Plows.

High-speed rotary plows and carrier vehicles shall be in accordance with SAE ARP 5539, Rotary Plow with Carrier Vehicle.

a. Additional Federal AIP/PFC specification requirements for SAE ARP 5539 follow:

(1) For carrier vehicle controllability and safety, all-wheel drive shall be standard.

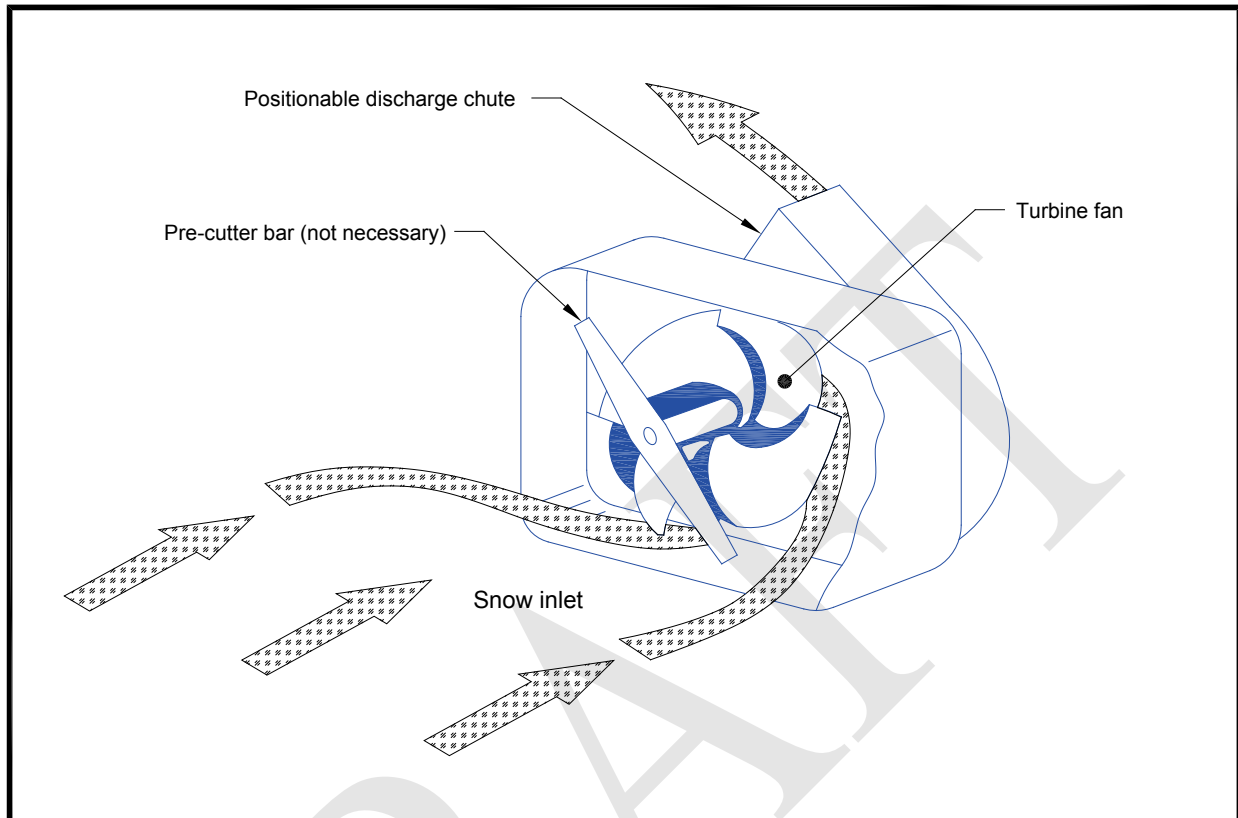


Figure 3—1. Single-stage rotary plow

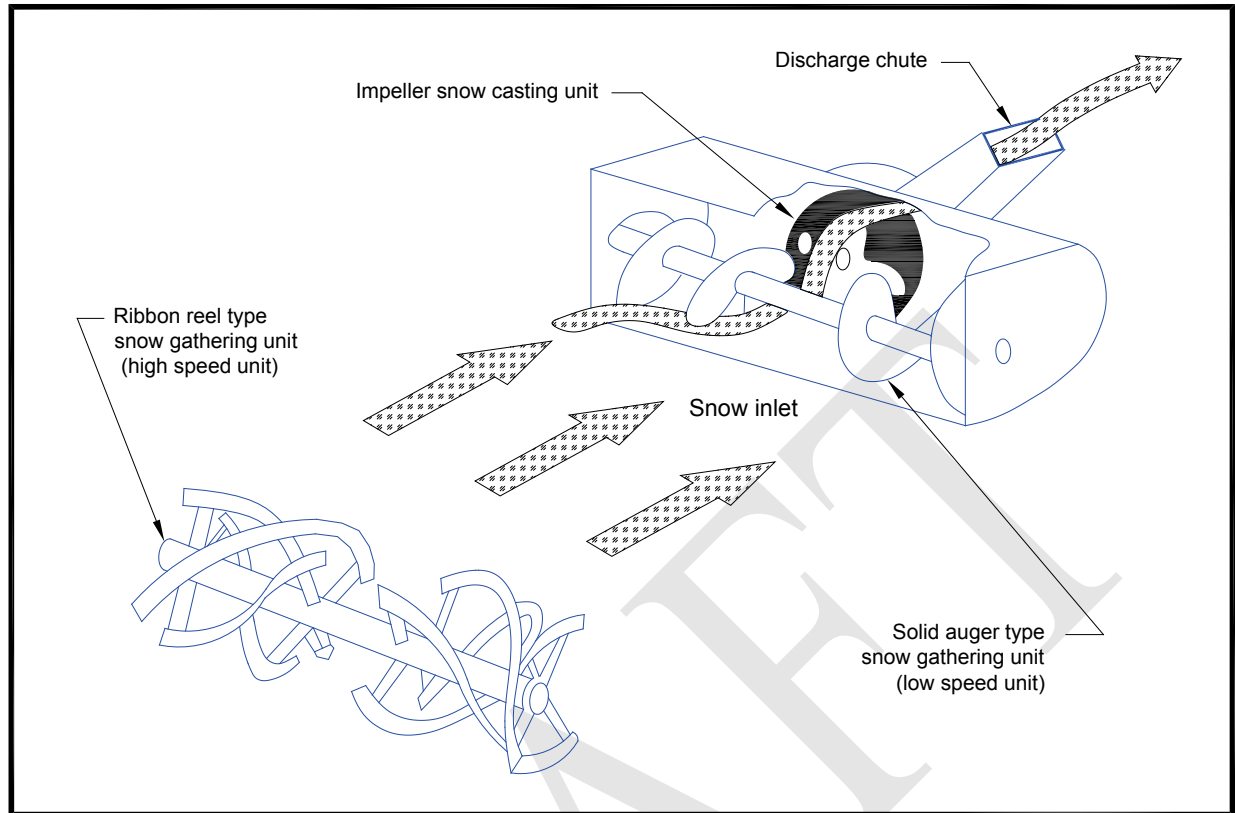


Figure 3—2. Two-stage rotary plow

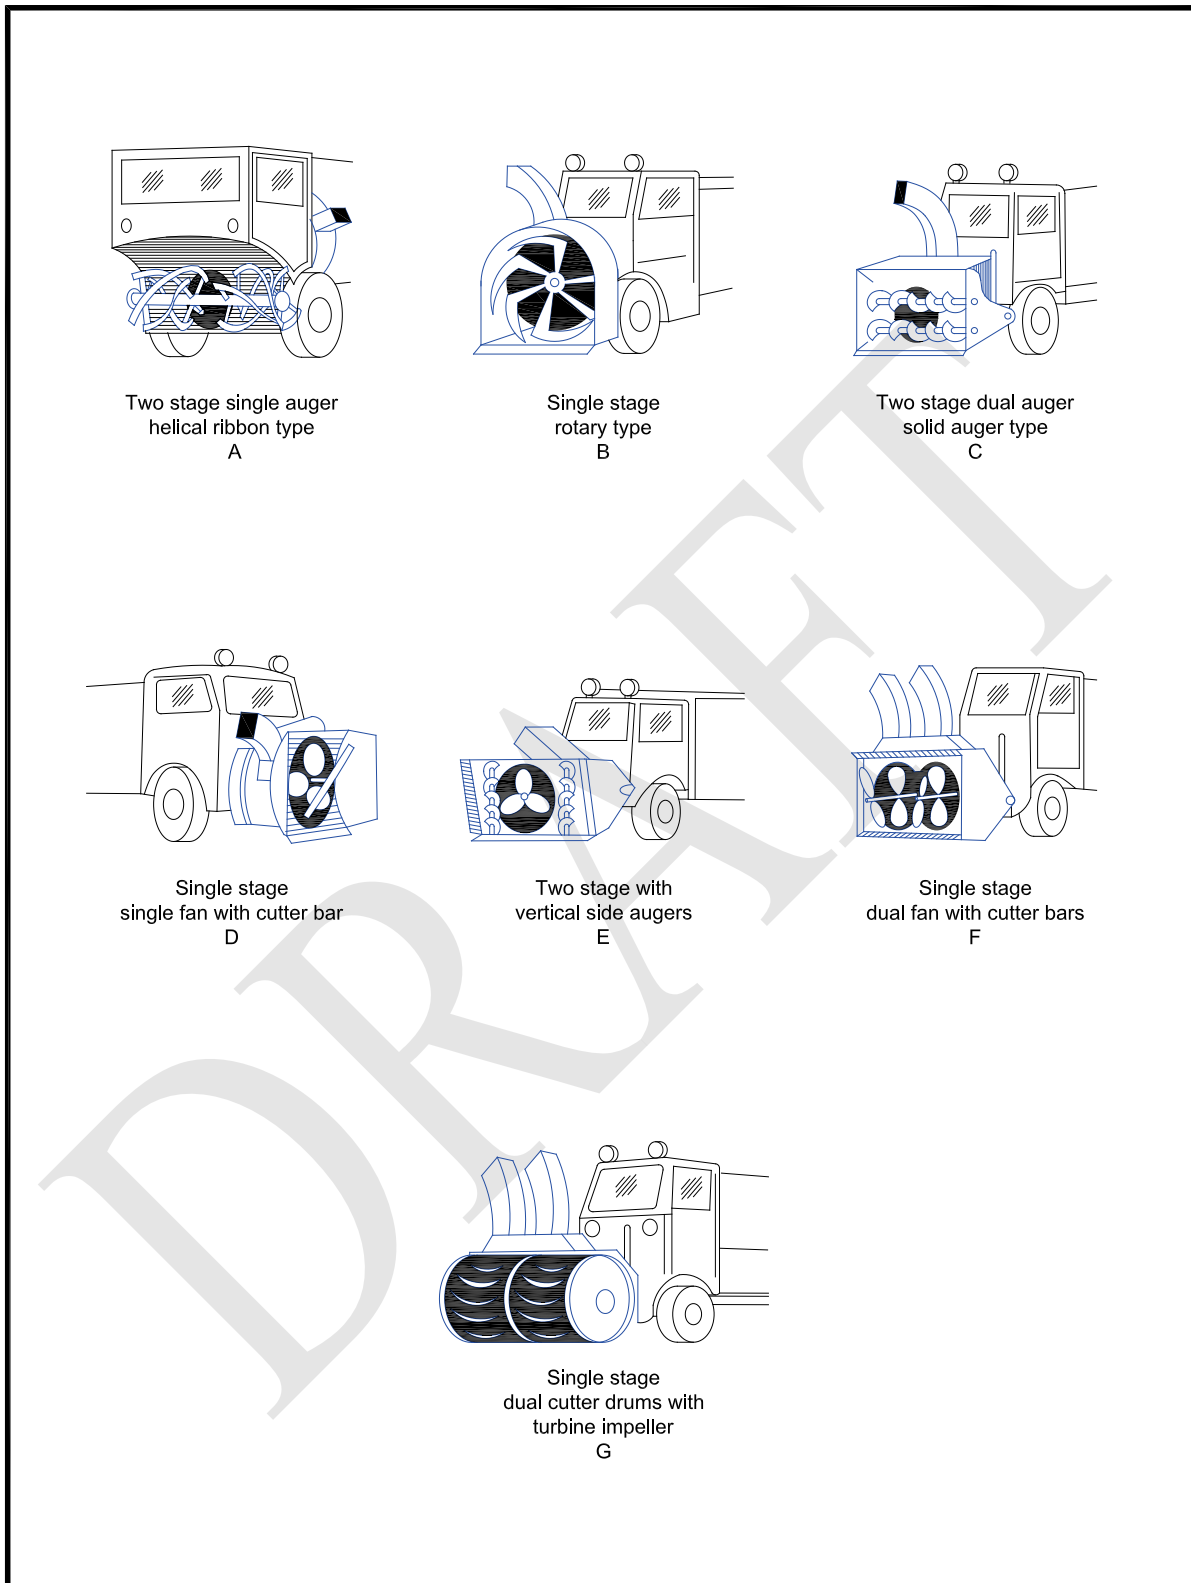


Figure 3—3. Typical rotary plow types

Chapter 4. Snow Plows

4-1 Description.

Snow plows consist of a cutting edge to shear snow from the pavement and a moldboard to lift and cast the dislodged snow to the side of the cleared path. The cutting edge may ride in contact with the pavement or be held a small distance above it by means of shoes or caster wheels. A complete snow plow unit consists of a snow plow, carrier vehicle, and accessories (see Figure 4-1). Snow plow sizes may be classified as follows:

- a. Small Snow Plow.** This category includes snow plows with cutting edge lengths ranging from approximately 6 feet up to 10 feet (1.8 m up to 3.0 m). Included in this category are underbody-mounted truck scrapers with similar length cutting edges.
- b. Intermediate Snow Plow.** This category includes snow plows with cutting edge lengths ranging from approximately 10 feet up to 15 feet (3.0 m up to 4.6 m). Underbody-mounted truck scrapers with similar length cutting edges are also included in this category.
- c. Large Snow Plow.** This category includes snow plows with cutting edge lengths ranging from approximately 15 feet up to 22 feet (4.6 m up to 6.7 m). Ramp dozer plows and large special purpose plows are included in this category.
- d. Extra Large Snow Plow.** This category includes plows with cutting edge lengths greater than 22 feet (6.7 m). Ramp dozer plows and extra-large special purpose plows are included in this category.

4-2 Snow Plow Uses.

Snow plows are most commonly mounted on the front of a carrier vehicle, but they may also be mounted on the side or underneath the vehicle as illustrated in Figure 4-2.

- a. Front-Mounted Snow Plows.**
 - (1) **One-Way Fixed Angle Snow Plow.** This unit is primarily used in large open area snow plowing operations that require a high-volume and high-speed snow discharge at fixed left or right cutting angles.
 - (2) **Power Reversible Snow Plow.** This unit may be used for both large open area or confined area snow plowing operations. The design provides variable blade positions to either the right or left of the bulldozing position. This allows high volumes of snow to be displaced in a direction dictated by wind conditions or other constraints. The ability to reverse the snow plow angle improves operational efficiency and may reduce the number of snow plow units required.
 - (3) **Rollover Power Reversible Snow Plow.** The primary use of this unit is for large open area snow plowing operations. High-speed and high volume snow discharge to either a right or left cutting angle may be achieved by rotating the blade assembly through 180

degrees. This type of snow plow is not recommended for bulldozing. The rollover concept reduces snow spillage by confining and spreading it through a tapered moldboard design.

(4) **Power Reversible Snow Plow with Folding Wings.** The primary use of this unit is for wide and extra-wide swath snow plowing operations at various rates of speed. Cutting an extra-wide swath may require a special carrier vehicle having high horsepower. When not in use, the wings should be designed to fold snugly against the carrier vehicle chassis.

(5) **Flexible Reversible Snow Plow.** This unit is made of polymer construction and is capable of changing its cross-sectional shape. It is versatile and can be used as a one-way fixed angle snow plow or a power reversible snow plow with the added feature that it can be adjusted to fit a variety of weather and snow conditions.

(6) **Ramp Dozer.** This unit is primarily used in confined areas that require wide to extra-wide swath plowing, but it may also be used to transport and dump snow. The ramp blade is equipped with side plates to contain snow and prevent spillage. Removal of the moldboard cutting edge allows the moldboard to act as a bucket for snow loading.

(7) **Snow Buckets and Snow Baskets.** Such equipment shall be equipped for mounting on a wheel loader or industrial 4×4 tractor. See Part B of Appendix 3 for details.

b. Side-Mounted Wings.

(1) **Extension Wings.** These attachments are mounted on either side of the carrier vehicle to increase the swath of the front-mounted snow plow. They are capable of high volume, high-speed snow removal operations.

(2) **Leveling Wings.** These units operate with a front-mounted snow plow for windrow and snow bank leveling/trimming operations. The adjustable height of the leveling wing is designed to cast high drifted snow banks away from the cleared snow swath cut by the snow plow. They are designed for high-speed snow removal operations.

c. Underbody-Mounted Scraper. This unit is mounted behind the cab and on the underbody of a large truck or grader. During operation, constant ground pressure is applied by the scraper blade on the pavement surface. The blade is capable of rotating its snow cast to either the left or right, thereby enhancing its ability to operate in confined areas.

4-3 SAE ARP Equipment Specification for Snow Plows and Carrier Vehicles.

Snow plows and carrier vehicles shall be in accordance with SAE ARP 5943, Snowplows and Hitches.


a. Additional Federal AIP/PFC specification requirements for SAE ARP 5943 follow:

(1) For conventional carrier vehicle controllability and safety, all-wheel drive shall be standard.

(2) Only non-metal cutting edges shall be used on pavements having in-pavement lighting.

(3) Under paragraph 4.1.1.(c), the snow plow manufacturer shall provide the airport sponsor certification for the polyethylene moldboard material.

(4) Under paragraph 4.2.1, the overall width of the snow plow assembly in the folder position (wings retracted) with required casters shall allow enter into the Federally funded snow removal building (AC 150/5200-18) housing the snow plow and other such equipment.

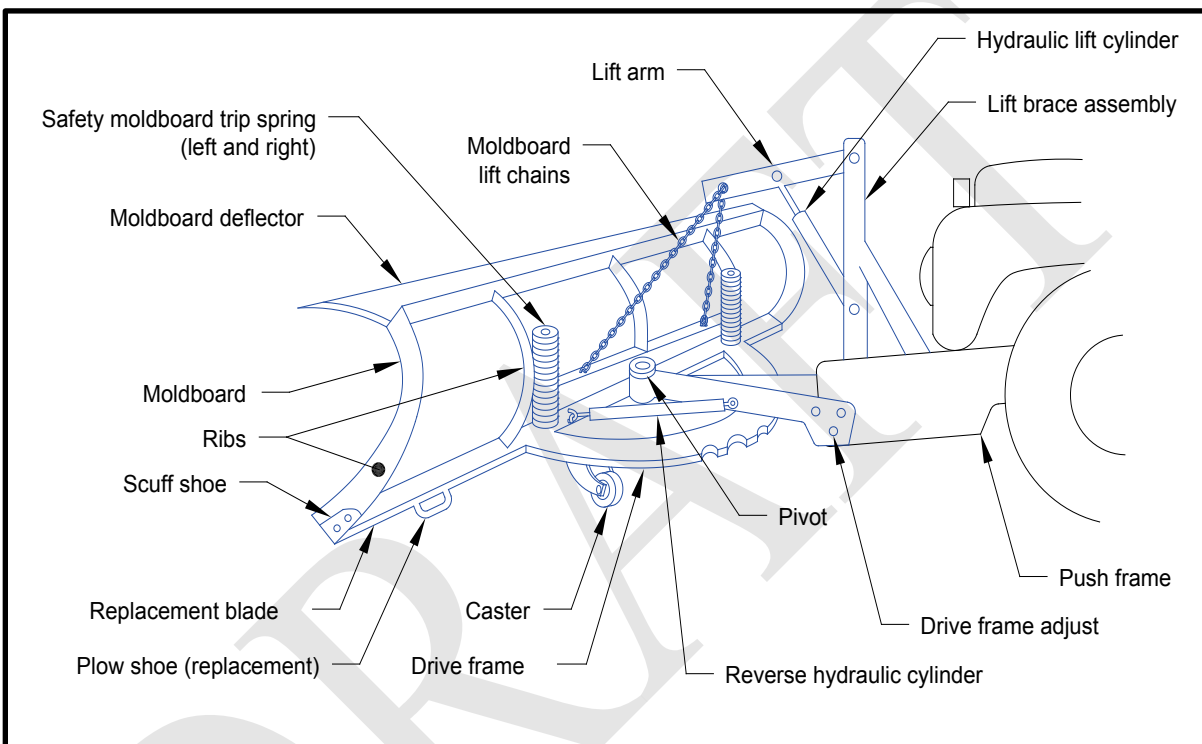

Note: This figure illustrates a power reversible snow plow with all general components. Details of snow plow components may vary with snow plow manufacturer and type of snow plow.

Figure 4—1. Snow plow components

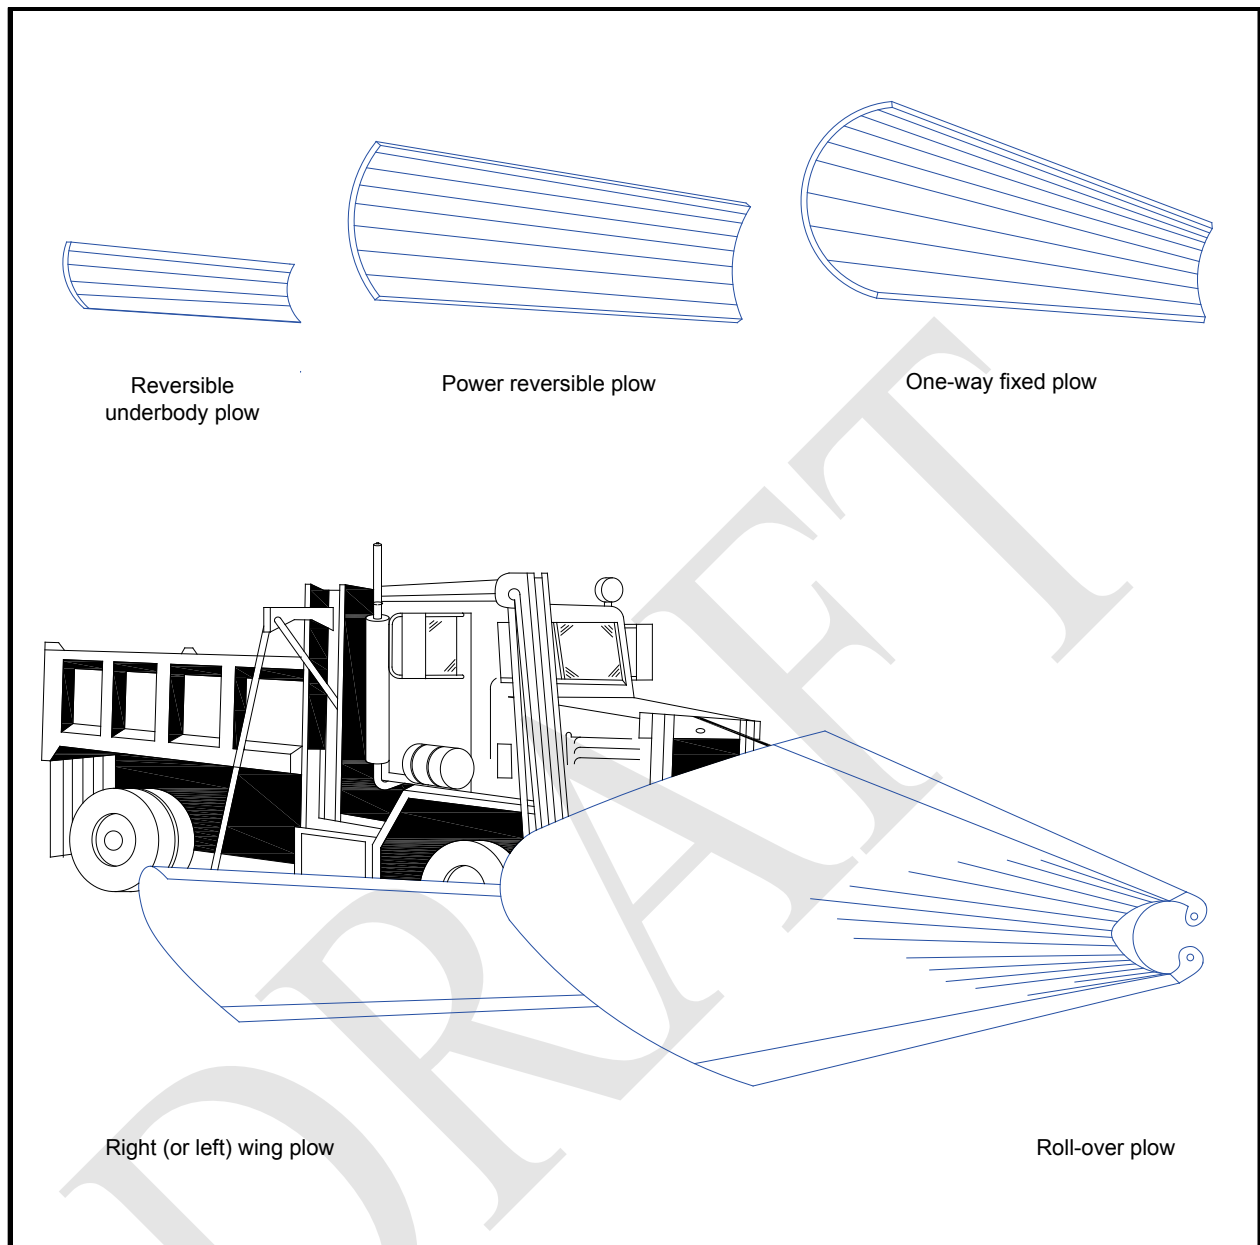


Figure 4—2. Different types of snow plows

Chapter 5. Material Spreaders

5-1 Description.

The function of a material spreader is to provide a continuous, unrestricted, accurately metered flow of sand and solid or liquid deicers/anti-icers per AC 150/5200-30 to a pavement surface over a predetermined spread area. Spreader units may be a permanent vehicle-mounted or slip-in hopper or they may be attached to a carrier vehicle. A spreader unit consists of a material storage compartment (hopper or tank), pre-wetting mechanism, a feed mechanism to carry the material to the discharge opening, a metering device to control the application rate, and a distribution mechanism. The selection of a material spreader is primarily defined by the carrying capacity of the hopper (cubic yards) or tankage (gallons) and the width of the path to receive material. This chapter provides a method to determine hopper and tankage capacities.

5-2 Types of Material Spreaders.

a. Dry Material Spreaders. This type of material spreader for sand and solid de/anti-icers uses a hopper type material spreader combined, as standard, a liquid reservoir for pre-wetting sand with an approved liquid de/anti-icer for skid mounting or chassis mounting onto a carrier vehicle. Figures 5-1 and 5-2 illustrate typical types of dry material spreaders. Spreading width varies from about 12 feet (3.6 m) to about 80 feet (24.4 m) and hopper capacity varies from about 5 yd³ (3.8 m³) to 16 yd³ (12.2 m³)

(1) **Conventional Hopper Spreaders.** Chassis mounted or slip in type hopper spreaders mount longitudinally between or directly over the carrier vehicle frame members.

(2) **Multi-Purpose Dump Body Spreader.** Multi-purpose dump body spreaders mount directly over the carrier vehicle frame members. The spreader may function as an elevating-dump body and as a material spreader.

(3) **Tailgate Spreader.** Tailgate spreaders mount on or under the tailgate of an elevating dump body. Hopper capacity is determined by the capacity of the dump body.

(4) **Towed Trailer Spreader.** A trailer spreader is towed by a separate vehicle but has its own frame and suspension system.

b. Liquid Material Spreaders. Liquid material spreaders may be self-contained or mounted on a carrier vehicle. De/anti-icing chemicals are applied to pavement surfaces via a spray applicator system consisting of a supply tank, pump, flow rate monitor, and a spray bar equipped with nozzles. Tank capacities typically range from 500 to 4,000 gallons (1,900 to 15,200 liters).

5-3 SAE ARP Equipment Specification for Material Spreaders.

Sand and solid deicing/anti-icing material spreaders shall be in accordance with SAE ARP 6059, Solid Deicing/Anti-icing Material Spreader for Airport Application. Regarding a specification for liquid spreaders, SAE G15 is developing draft ARP 5559, Liquid Deicing/Anti-icing Material

Spreader for Airport Application. This AC will reference that aerospace recommended practice upon its issuance by SAE. Until then, liquid deicing/anti-icing material spreaders shall be in accordance with Appendix 5 Part B specifications for liquid spreaders.

a. Additional Federal AIP/PFC specification requirements for SAE ARP 6059 follow:

- (1) For conventional carrier vehicle controllability and safety, all-wheel drive shall be standard.
- (2) Paragraph 3.2; the maximum material spreading width of not less than 40 feet is specified.
- (3) Paragraph 3.3.1; for new carrier vehicle applications the spreader manufacturer and the airport operator shall work with the carrier vehicle manufacturer to assure compatibility.
- (4) Paragraph 3.9; type 1 standard; type 2 not eligible.
- (5) Paragraph 3.16; the following items are standard.
 - (i) Paragraph 3.16.4 one per airport under SAE ARP 5623, Mobile Infrared Runway Surface and Digital Ambient Sensor.
 - (ii) Paragraphs 3.16.9, 3.16.10; 3.16.11; 3.16.12; 3.16.15; 3.16.16; 3.16.17; and 3.16.18 are all standard.
- (6) Paragraph 3.17 not eligible.
- (7) Paragraph 3.18; only 1 set of manuals, diagnostic tools, equipment, software and programs are furnished.


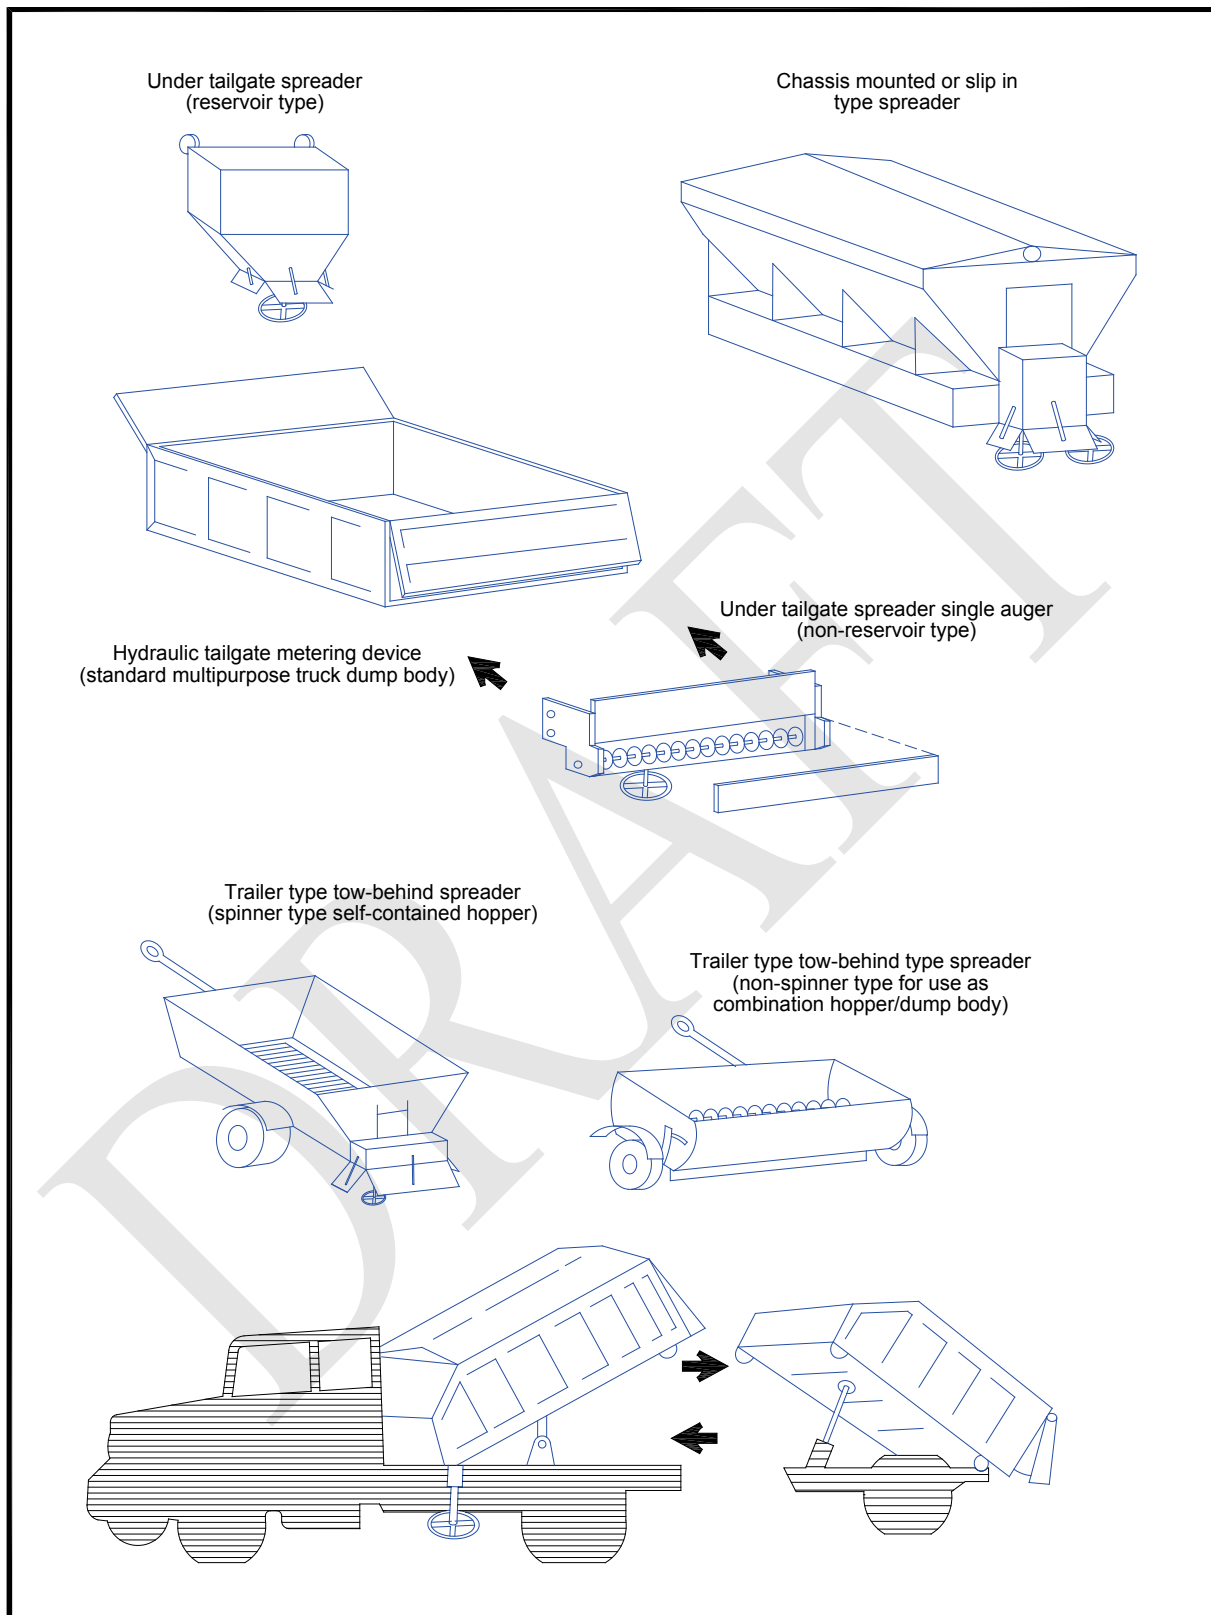


Figure 5—1. Dry material spreader types

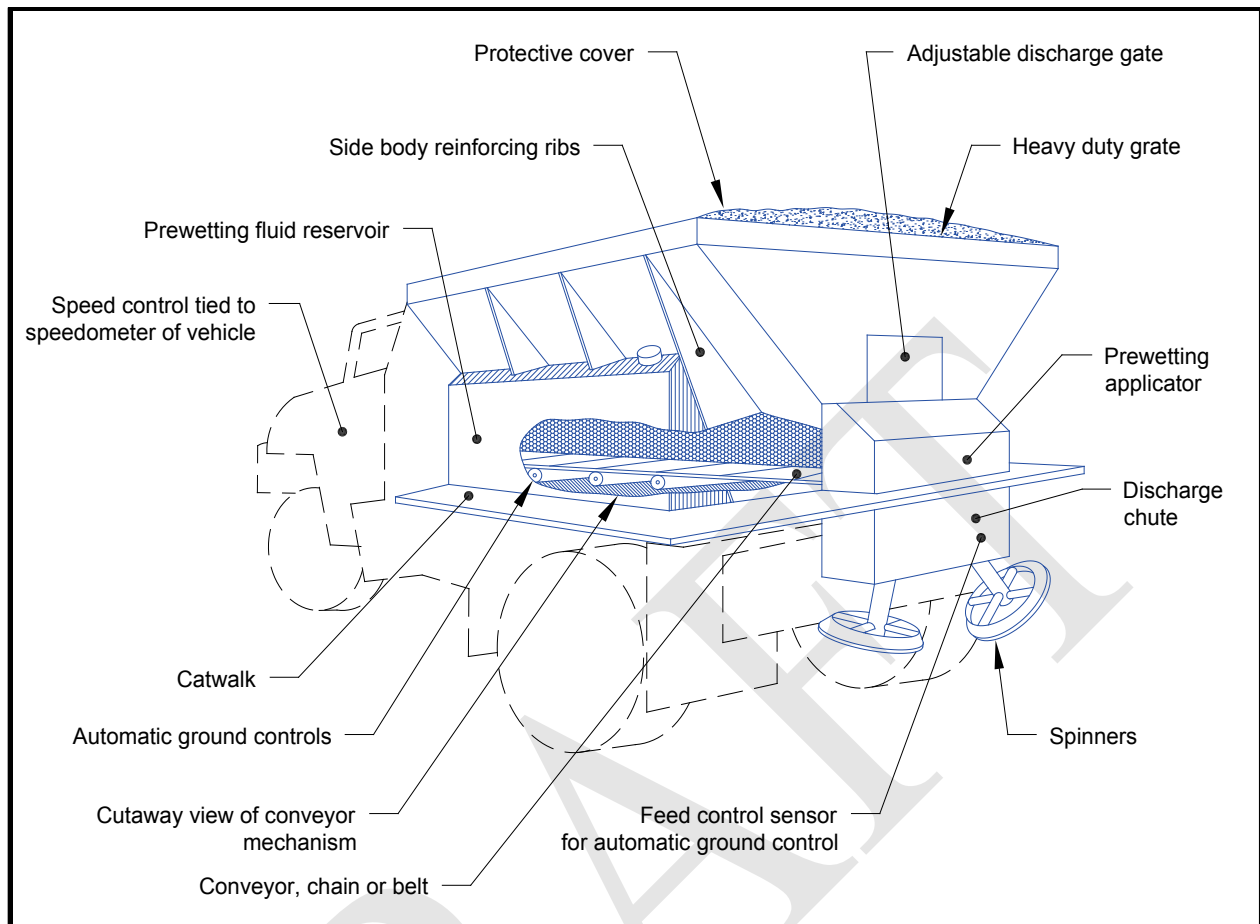

Note: This figure depicts the general layout of a typical dry hopper system having a hydraulic or mechanical drive, a belt or chain type conveyor, and a dual spinner spreader. Some optional recommended devices are also depicted. Other spreader configurations may contain components differing in design, but essentially perform the same function.

Figure 5—2. Example of one design and component layout of a dry material spreader

Chapter 6. Airport Runway Brooms

6-1. Description.

Airport runway brooms with airblast are primarily used in the high-speed sweeping and cleaning of snow, slush, ice, and debris from airport operational areas by using a brush with bristles. They incorporate high-speed brooms that consist of a number of brush sections which may be front mounted to a carrier vehicle (conventional or dedicated), mounted underbody, or mounted on a trailer arrangement that is towed by a carrier vehicle. All are capable of sweeping wet slushy snow as well as fine dry snow from pavement surfaces. The broom framework shall be designed to provide continuous service under difficult working conditions in cold climates. A broom may be complimented by an airblast system which is located behind the brush assembly. The airport runway brooms with airblast system is used to sweep the pavement area clean of snow, slush, sand, and other debris, help dry the pavement surface, and clear snow from around runway lights.

6-2. Types of Airport Runway Brooms.

a. Typical configurations of airport runway broom arrangements being used worldwide on airports are as follows. The front mounted configuration has the broom preceding the carrier vehicle and allows the operator to directly observe the area being swept. Two other similar versions are a tractor mounted and a loader mounted configuration with the broom attached to the front. The loader mounted option requires a dedicated auxiliary engine. The towed behind configuration fixes the broom to a trailer that is towed by a carrier vehicle. The operator observes the area being swept by use of mirrors and must maneuver the carrier vehicle and trailer together by carefully observing their outer dimensions. The underbody configuration places the broom between the front and rear axles of the carrier vehicle.

b. Figures 6-1 and 6-2 of this AC illustrate some of the broom types that use a convention carrier vehicle configuration while SAE ARP 5548, Multi-Tasking Equipment (MTE) for Airfield Snow Removal, illustrates the various MTE dedicated carrier vehicle configurations. Figure 6-3 illustrates common types of broom bristles.

6-3 Classification.

The following two general classes constitute the family of airport runway brooms. All swath widths shall be measured when the broom is angled 30 degrees from the transverse position.

a. **Small Swath Sweeper.** This sweeper class may be of any physical design having a demonstrated or manufacturer's certified snow or slush removal and broadcasting ability sufficient to produce clear pavement within the swath width at the rated speed. The sweeper shall have a minimum broom diameter of 36 inches (91 cm) and a swath width of not more than 12 feet (3.7m).

b. **Large Swath Sweeper.** This sweeper class may be of any physical design having a demonstrated or manufacturer's certified snow or slush removal and broadcasting ability sufficient to produce clear pavement within the swath width at the rated speed. The sweeper shall

have a minimum broom diameter of 36 inches (91 cm) and a swath width greater than 12 feet (3.7m).

6-4. SAE ARP Equipment Specification for Airport Runway Brooms with Airblast.

Airport runway brooms with airblast shall be in accordance with SAE ARP 5564, Airport Runway Brooms.

a. Additional Federal AIP/PFC specification requirements for SAE ARP 5564 follow:


(1) For conventional carrier vehicle controllability and safety, all-wheel drive shall be standard for conventional carrier vehicles.

(2) For dedicated carrier vehicle (MTE) controllability and safety, all-wheel drive for at least three axles shall be standard for MTE carrier vehicles.


(3) Airblast is standard equipment for all selections.

(4) Under paragraph 6.22 of SAE ARP 5564, the following additional equipment is standard. Other items listed under paragraph 6.22 are not eligible.


- (i) Specialized tools – not to include computers and electronic diagnostic machines
- (ii) Cold weather package – must provide justification for approval
- (iii) Optional brush wafers and cassettes – only wafers permitted
- (iv) LED marker lights located per SAE ARP 5564
- (v) An automatic lubrication system for all possible points.
- (vi) 20-pound fire extinguisher
- (vii) Brush speed control by ground control, and
- (viii) foreign object debris (FOD)/debris pickup box with cab controls.

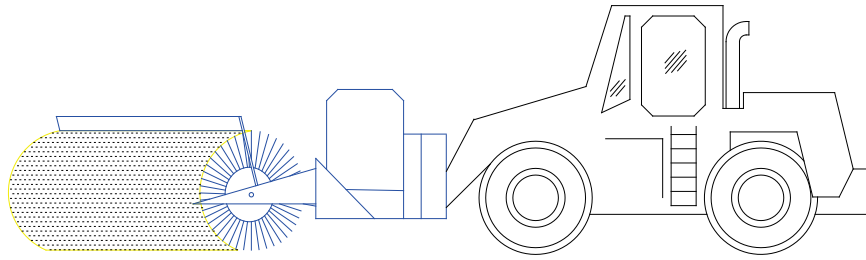


Pushed type sweeper tractor or wheel loader vehicle powered by auxiliary engine
small to large swath

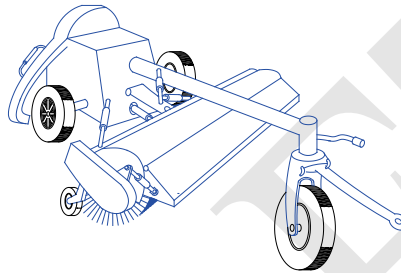

Towed type sweeper 36 - 46 inch brush
small to large swath

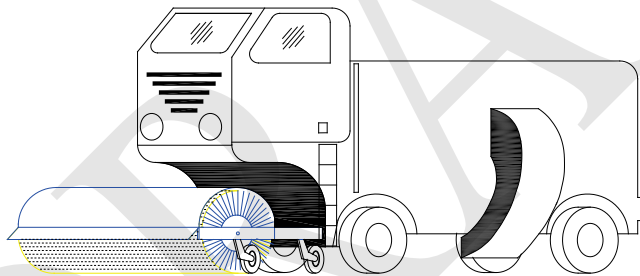


Pushed type sweeper special purpose vehicle integral engine/rear blower cab-over design
small to large swath

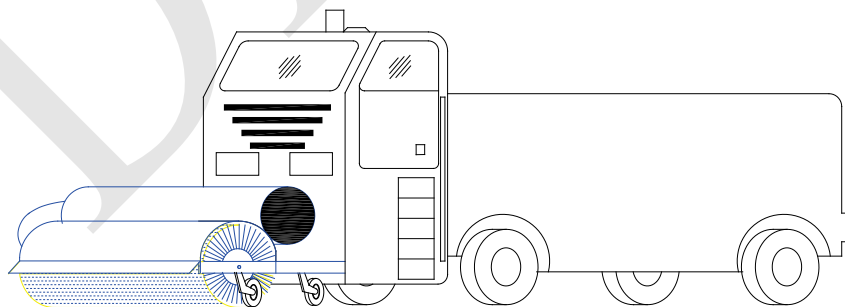

Pushed type sweeper special purpose or truck type vehicle two engine/front blower
heavy duty/large swath

Figure 6—1. Typical airport runway brooms

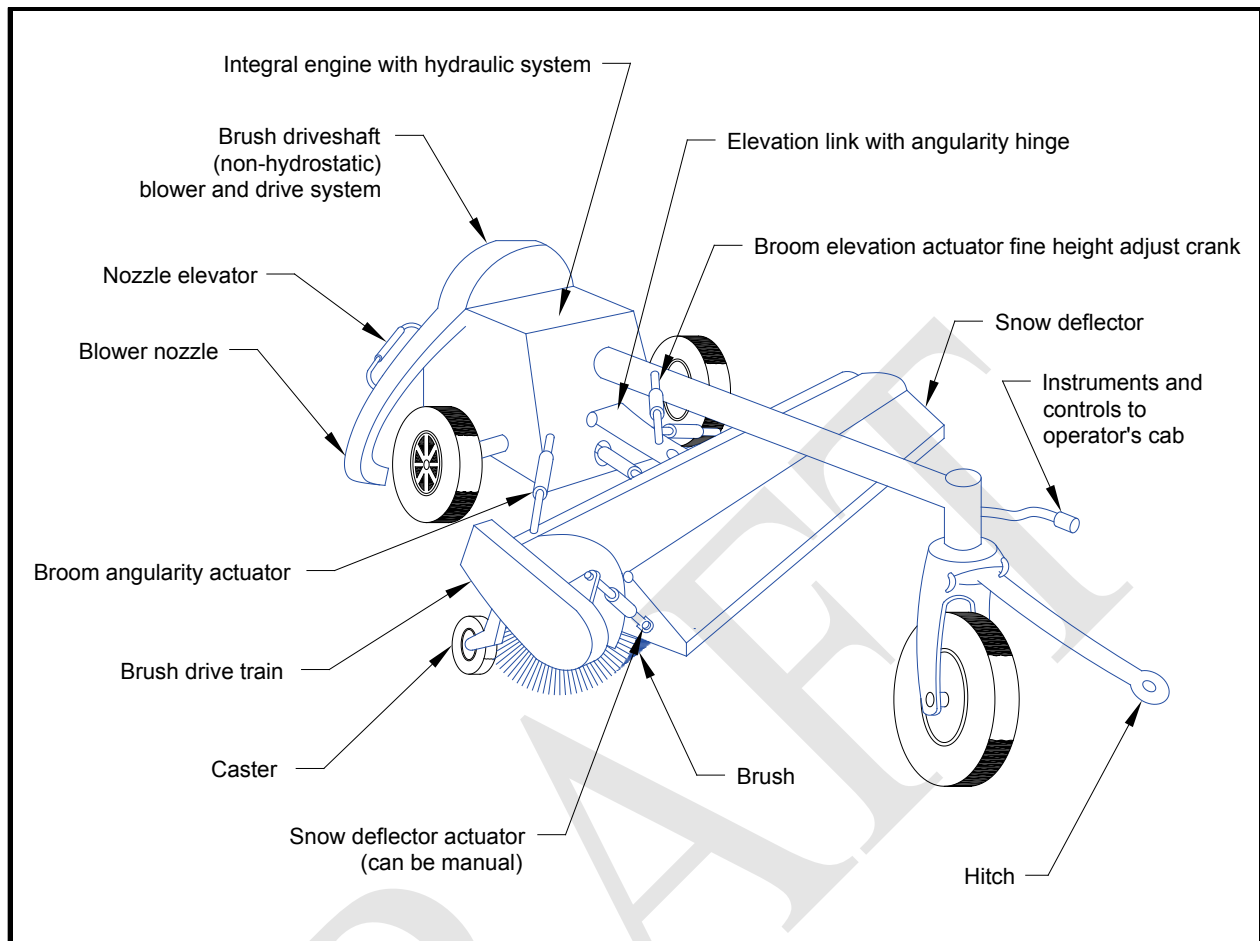

Note: General layout showing common sweeper components and construction features for most sweeper types, pushed as well as towed.

Figure 6—2. Towed type airport runway broom

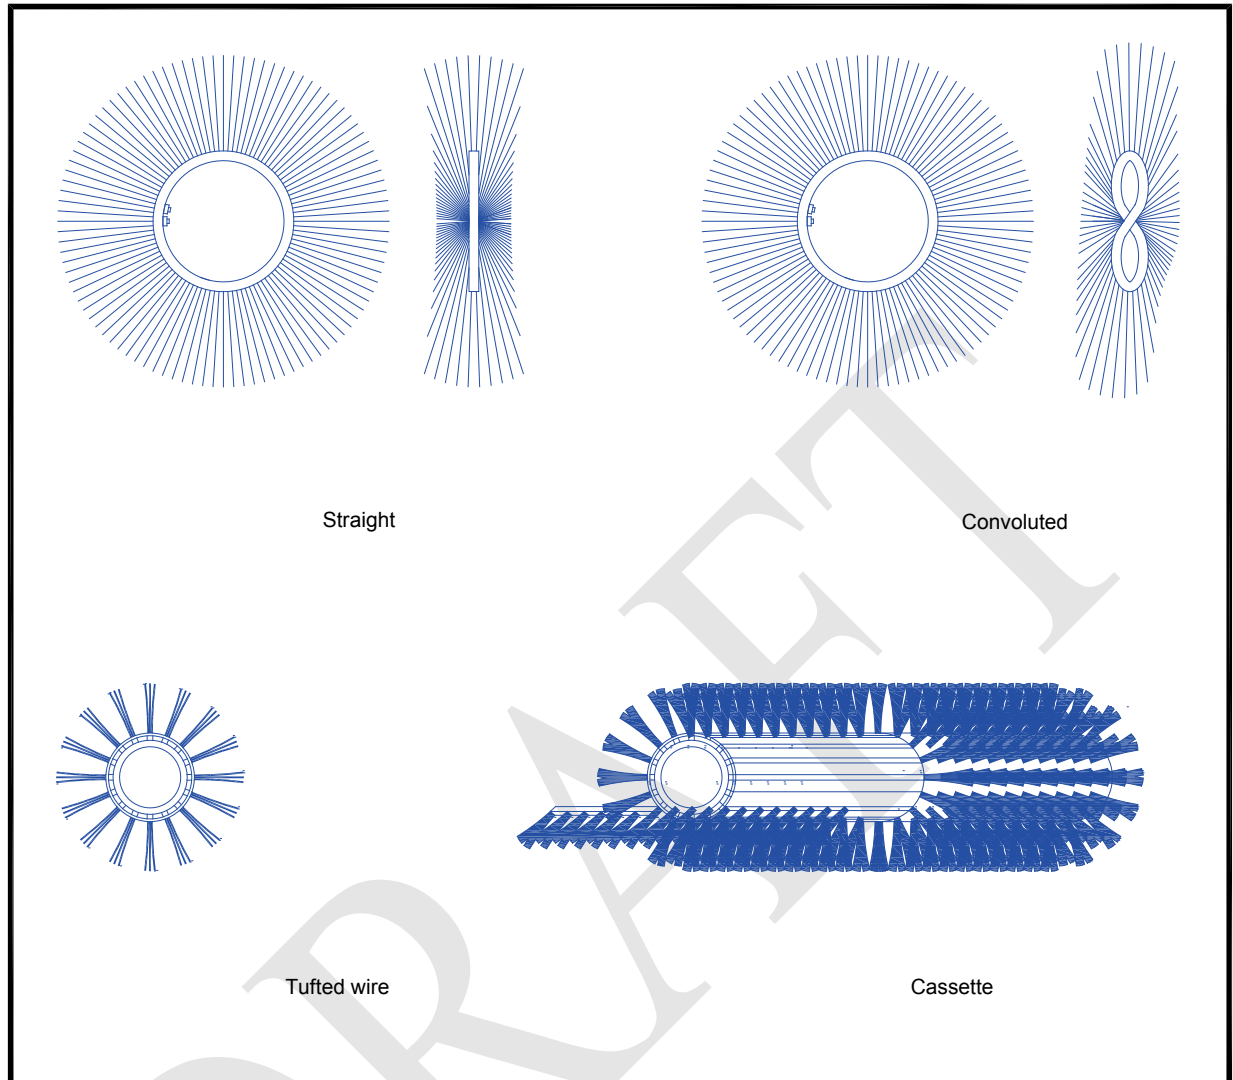


Figure 6—3. Common types of broom bristles used on airports

This page intentionally left blank.

Chapter 7. Types of Carrier Vehicles

7-1 Description.

The term carrier vehicle represents the various self-propelled prime movers that provide the power necessary for the snow removal and ice control equipment to move snow, slush, ice and other debris from the pavement during winter operations. Carrier vehicle selection is determined by the mission(s) to be performed and the capacity of the selected equipment to perform the designated task(s). The term “capacity” can refer to the amount of snow to be removed, the hopper of dry material spreaders, or tankage of liquid material spreaders.

a. Truck Type Conventional Carrier Vehicles. Truck type conventional carrier vehicles are standard production truck models designed primarily to meet an airport's snow and ice control needs by attaching or/and towing snow removal and ice control equipment. Additionally, this truck type can be of an integrated design that is built for a specific piece of equipment, such as a self-propelled high-speed rotary plow. Conventional carrier vehicles also have the ability to perform secondary airport functions, such as equipped for several summer time tasks, for example, FOD exercises during summer months. They should conform to the manufacturer's performance recommendations and be suitable for mounting all specified accessories.

b. Truck Type Special Purpose Carrier Vehicles. Special purpose carrier vehicles can be categorized as conventional or dedicated carrier vehicles. An example of a conventional special purpose carrier vehicle is one that is customized specifically to meet special airport needs. Some examples include a specialized high-speed rotary plow necessary to remove and cast huge volumes of heavy dense snow; a specialized snow plow that requires an extra-wide moldboard and horsepower to perform extra-wide swath clearing operations over long distances. In comparison, a dedicated carrier vehicle is a specifically built prime mover that integrates the tasks of snow plowing, brooming, and air blasting, at a minimum, for high-speed clearing operations of at least 30 mph (48 km/h). Industry refers to the latter category as high-speed, MTE and defined by SAE ARP 5588, Multi-Tasking Equipment (MTE) for Airfield Snow Removal High Speed, Multi-Tasking Snow Removal Unit to include Carrier Vehicle, Snow Plow, Rotary Broom High Velocity Air. For airport operators selecting MTEs, see paragraph 7-4 for further information and requirements.

c. Front-Wheel Loaders. Front-wheel loaders are standard production four-wheel drive articulated and non-articulated conventional carrier vehicles, normally equipped with a front-mounted bucket or basket, which operates at low speeds of 5 to 20 mph (8 to 30 km/h). They are very efficient for short haul operations and are used to clear or haul compacted snow and ice from heavily used ramp and terminal areas and around pavement lights. A front-wheel loader will generally out-perform a truck-mounted snow plow in such confined areas, but it is not as efficient when large open paved areas need to be cleared quickly. Other applications include snow loading and stockpiling and loading of solid chemicals and airside sand.

d. Industrial 4×4 Tractors. Industrial 4×4 tractors are standard production models adapted for snow and ice control work in confined areas. While similar to wheel loaders, most are built to operate at higher speeds.

7-2. Carrier Vehicle Dimension.

Carrier vehicle dimensions should permit the carrier vehicles to pass through the standard industrial door openings of service and storage buildings. See AC 150/5220-18, Buildings for Storage and Maintenance of Airport Snow and Ice Control Equipment and Materials, for FAA recommended door openings, parking space set-asides, and other clearances within these buildings. Additionally, the selected dimensions should permit servicing of equipment by standard lifts and cranes without the need for special equipment or the need for building modifications.

7-3 Outdoor Storage of Carrier Vehicles.

See Appendix 2 for additional equipment to be considered when operating a carrier vehicle at or below -40°F (-40°C) or when the carrier vehicle must be stored outside or in an unheated building.

7-4. SAE ARP Equipment Specification for MTE Dedicated Carrier Vehicles.

MTEs shall be in accordance with SAE ARP 5588, Multi-Tasking Equipment (MTE) for Airfield Snow Removal High Speed, Multi-Tasking Snow Removal Unit to include Carrier Vehicle, Snow Plow, Rotary Broom High Velocity Air.

a. Additional Federal AIP/PFC specification requirements for SAE ARP 5588 follow:

(1) An airport sponsor requesting a MTE must be eligible for both a snow plow truck and an airport runway broom. The lack in the eligibility for both pieces of equipment results in the MTE not being eligible. One MTE replaces the eligibility for two pieces of snow removal and ice control equipment.

(2) A Snow and Ice Control Plan must be completed and the tons per hour requirement of the Priority 1 paved area for the MTE performance must be calculated.

For dedicated carrier vehicle (MTE) controllability and safety, all-wheel drive for at least three axles shall be standard.

(3) For dedicated carrier vehicle controllability and safety, all-wheel drive shall be standard.

(4) Additional features not a part of this specification may not be eligible for Federal funding.

(5) This SAE ARP specification allows for various options or selections to be specified by the procurement official; however, unless a selection is offered in Table 7-1 the

purchaser will receive the standard catalog equipment offered on the winning bidder's equipment. A selection is not available to the procurement official.

Table 7-1. MTE specification selections

SAE ARP 5588 Paragraph number	Selection Descriptions	Pre-approved by FAA as standard, required item	Type of Airport Selection <i>See Notes 1 and 2</i>
5.1	Indicate acceptable design(s): 1. Modular Unit 2. Integral Non-Articulating 3. Integral Articulating	Justification Required	Note 2
5.3.1	100-foot wall to wall maximum turning test Supplemental performance testing	YES	Note 1 Airport may select and manufacturer should attend testing
6.2.3	Install pintle hitch	YES	Note 1
6.3	Standard Catalog Diesel Engines Note: Alternative Fuel Engines (Not available at this time.)	YES	Note 1
6.3.7	Thermostatically controlled fuel tank heaters	Justification Required	Note 2
6.3.7	Thermostatically controlled fuel line heaters	Justification Required	Note 2
6.4.4i	Transfer case (Standard Manufacturer Equipment)	YES	Note 1
6.6.1	Steering enhancements (Standard Manufacturer's Design)	YES	Note 1
6.6.2	Standard Catalog Steering	YES	No selection among stated options
6.6.2	Enhanced Steering	Justification Required	Note 2
6.6.2	AWS Managers Switch	Justification Required	Note 2
6.8.3	Spare Rim/Tire	Justification Required	Note 2
6.9.2	Arctic type hoses	Justification Required	Note 2
6.9.2	UV protected hoses	Justification Required	Note 2

SAE ARP 5588 Paragraph number	Selection Descriptions	Pre-approved by FAA as standard, required item	Type of Airport Selection <i>See Notes 1 and 2</i>
6.9.4	Hydraulic system preheater (must be justified)	Justification Required	Note 2
6.10.2	Auto-Lubrication system	Justification Required	Note 2
6.11.1	Managed Battery System (Not Eligible)	YES	Note 1
6.12d	Choose 1 type:	YES	Note 1
	(a) Reflectors		
	(b) Conspicuity Markings		
6.12.4	Auxiliary or Specialty Lighting (Not Eligible)	YES	Note 1
6.12.6	Audible Back up Alarm	YES	Note 1
6.12.7	Standard equipment horn (Manufacturers Standard Air or Electric - no choice)	YES	Note 1
6.13.1	Engine Coolant Heater	Justification Required	Note 2
6.13.2	Engine Oil Heater	YES	Note 1
6.13.4	Ether Start Provision	YES	Note 1
6.13.6	Hydraulic tank heaters	Justification Required	Note 2
6.15	Operator's Cab (No Choice of Cab) Manufacturer's Standard Design	YES	Note 1
6.15.3	Cab Glass (No Choice of Cab) Manufacturer's Standard Design	YES	Note 1
6.15.4	Heated wipers & Fluid system	Justification Required	Note 2
6.15.7	Rear View Mirrors (No Choice of Mirrors) Manufacturer's Standard Design	YES	Note 1
6.15.8	Sun Visors (No Choice of Visors) Manufacturer's Standard Design	YES	Note 1
6.15.11	Prewired for two-way radio components (Power Only)	YES	Note 1
6.15.12	Windshield Deluge System	YES	Note 1
6.16.7	Delete AM/FM Radio w/clock	NO	Not allowed
8.5	Select (1) Type of Cutting edge:	YES	Note 1
	(a) Tungsten Carbide	not allowed with in-pavement lighting	
	(b) Rubber (must have in pavement lights)		

SAE ARP 5588 Paragraph number	Selection Descriptions	Pre-approved by FAA as standard, required item	Type of Airport Selection <i>See Notes 1 and 2</i>
	(c) Polyurethane (must have in pavement lights)		
	(d) High Carbon Steel	not allowed with in-pavement lighting	
	(e) Rubber Section Blades w/carbide inserts		
	(f) Reverse angle style cutting edge		
8.6	Single or Double acting lift cylinder (Manufacturers Std. Design)	YES	Note 1
8.6.1	Plow Quick hitch	Justification Required	Note 2
8.7	Spray Guard	YES	Note 1
8.8	Shock/Impact Absorbers	YES	Note 1
8.10	Single caster wheel assembly (Manufacturer's Std. Design)	YES	Note 1
8.10	Dual caster wheel assembly (Manufacturer's Std. Design)	YES	Note 1
8.10.1 & 2	Type of caster assembly – No selection (Manufacturer's Std. Design)	YES	Note 1
9.1	Stowable broom head (must be justified)	Justification Required	Note 2
9.1	Non-stowable broom head	YES	Note 1
9.2.3	36 inch brush diameter	Justification Required	Note 2
9.2.3	46 inch brush diameter (Recommended)	Justification Required	Note 2
9.2.4	Select 1 type:	YES	Note 1
	(a) Wire bristles		
	(b) Poly bristles		
	(c) Poly/wire combo: Mix: _____ (Sponsor must specify mix.)		
9.2.5.1a	Wafer bristles (Standard)	YES	Note 1
9.2.5.1c	Bristle end count: _____	YES	Note 1
Notes:			
1) FAA standard where the airport sponsor receives what the manufacturer supplies.			
2) The airport sponsor must justify the need and make such justification available to the FAA upon request. Additionally, the airport sponsor receives what the manufacturer supplies.			

This page intentionally left blank.

Chapter 8. Operational Standards and Compliance Testing

8-1 General.

The manufacturer shall be responsible for conducting tests to ensure that its snow removal and ice control equipment meets the operational and performance requirements it advertises. Certified records of these compliance tests shall be submitted by the manufacturer with each response to an invitation to bid. Equipment tests shall be conducted on standard production models and not on specially constructed prototypes.

a. Pre-testing. Each test carrier vehicle shall be examined to ensure that it is a standard production model and not a specially constructed unit made specifically for the test. Prior to testing, all controls, adjusting mechanisms, hydraulic systems and other assemblies shall be operated to ensure against leaks, restrictions and malfunctions. Once assured that the unit is fit, actual testing may begin.

b. Additional Testing. The purchaser may consider conducting its own operational, performance tests on equipment prior to acceptance. In such cases, the manufacturer should have the opportunity to witness the performance of such tests, but the costs for such testing and interpretation of results is the sole responsibility of the purchaser.

8-2 Required Carrier Vehicle Tests.

The carrier vehicle shall be tested in accordance to (1) this paragraph and (2) any referenced SAE ARP(s) for the specified equipment the carrier vehicle is to support. The following temperature, performance, and compliance tests are conducted when acquiring a carrier vehicle. Carrier vehicles shall be all-wheel drive.

a. Cold Weather Operations. A fully-equipped carrier vehicle (all types) with all attached snow removal and ice control equipment should be able to perform normal operations at an ambient temperature of:

- (1) 10°F (-12°C) below the lowest temperature in which the vehicle is expected to operate, or
- (2) -40°F (-40°C) at airports located in extremely cold climates.

b. Hot Weather Operations. The vehicle should be capable of operating at an ambient temperature of 70°F (21°C) at the maximum speed recommended by the manufacturer without any of the vehicle components exceeding their normal operating temperature.

c. Power. Carrier vehicles shall have sufficient power to perform all operational and attached functions simultaneously.

d. Performance. The following tests shall be conducted on a carrier vehicle loaded to its Gross Vehicle Weight and shall include the following systems: hydraulic, power train, brake, lighting, controls, and instruments.

(1) **10 Mile Test.** This test requires that the carrier vehicle be driven over hard surfaced roads at normal airport speeds for a distance of 10 miles (16 km) with no perceptive problems. Special attention shall be focused on vibration, steering, vehicle drift, rattles, leaks, and interior controls.

(2) **One Hour Test.** This is a time test that will be performed at a speed of 5 mph (8 km/h) over all types of terrain that would normally be encountered at the airport.

(3) **Service Brake Test.** This test shall be conducted at speeds of 20 mph and 40 mph (32 km/h and 64 km/h) respectively. Using the service brakes only, the fully loaded carrier vehicle shall be brought to a complete stop within a distance of 35 and 131 feet (11 and 40 m) measured from the point of brake application. The test shall be conducted for two complete cycles in either direction on a hard pavement surface that is dry, reasonably level and free of loose material. During this maneuver, no steering corrections shall be made for vehicle drift during the stop.

(4) **Emergency Brake Test.** This test shall be conducted at a speed of 40 mph (64 km/h). Using the emergency brake only, the fully loaded carrier vehicle shall be brought to a complete stop on the most critical airfield pavement grade within a distance of 288 feet (88 m) measured from the point of brake application. The test shall be conducted on a hard surface that is dry and free of loose material. Once stopped, the brake will continue to hold the carrier vehicle without fade for five minutes. During this maneuver no steering corrections shall be made for carrier vehicle drift during the stop.

8-3 High-Speed Rotary Plow Test.

Field tested in accordance with SAE ARP 5539, Rotary Plow with Carrier Vehicle, for the casting distance and tonnage capacity specified by airport operator using Table 2-3 of this AC.

8-4 Snow Plow Test.

With the exception for industrial 4×4 tractors and wheel loaders, field tested to SAE ARP 5943, Snowplows and Hitches, and to demonstrate the ability to:

- a. sustain a speed of 25 mph (40 km/h) on level pavement with a snow plow cutting edge angle set at 37 degrees while negotiating a 3 to 6 inch (7.6 to 15.2 cm) snow accumulation having a density of approximately 25 lb/ft³ (400 kg/m³) throughout a test section of at least 500 feet (152 m).
- b. discharge snow to either side of the carrier vehicle while moving (if the unit is power reversible).
- c. minimize snow spillover to 5 percent of total snow displaced.
- d. produce a clear swath that is even, regular and non-skipping.
- e. have the cutting edge (blade) relatively free of vibration during operation.

- f. Carrier vehicles shall be all-wheel drive.

8-5 Dry and Liquid Material Spreader Tests.

Field tested in accordance with SAE ARP 6059. Liquid and dry spreader settings for swath width and application rate should be verifiable by field measurements to an accuracy of 2 percent under a no wind condition.

- a. Towed spreaders are not to vibrate excessively during operation and braking.

8-6 Airport Runway Brooms with Airblast.

Field tested in accordance with SAE ARP 5564, Airport Runway Brooms, and the following testing requirements.

a. **Field test** should be conducted on a runway or taxiway having a length of at least 1,000 feet (305 m). Snow depth can vary, but the broom should be capable of removing snow at the following depths and densities:

(1) Small Swath Brooms - 12 feet and under. Two inches (5 cm) of light snow having density of 8 to 15 lb/ft³ (128 to 240 kg/m³) or one-half inch (1.3 cm) of slush at density of 40 lb/ft³ (641 kg/m³).

(2) Large Swath Brooms - over 12 feet. Three inches (7.6cm) of light snow having density of 8 to 15 lb/ft³ (128 to 240 kg/m³) or one inch (2.5cm) of slush at density of 40 lb/ft³ (641 kg/m³).

b. **Testing speed** should be as high as practical but not less than 8 mph (13 km/h) for small swath brooms and 25 mph (40 km/h) for large swath brooms.

c. **Resulting cleared swath** shall demonstrate the following:

(1) The resulting swath width is reasonably clean without snow deposits resulting from bouncing or skipping of the brush.

(2) The unit with airblast shall be capable of varying their brush rotational speed, angle of attack, and the degree of brush pressure applied to a surface area.

(3) The unit with airblast must be capable of broadcasting snow to either side of the carrier vehicle.

(4) The broom should show no performance degradation when sweeping thin deposits of sand, ash, water or other light debris.

(5) The unit with airblast shall be designed to allow all performance and monitoring functions to be controlled or observed by a single operator from the carrier vehicle cab.

This page intentionally left blank.

Appendix 1 - Specification for Carrier Vehicle**PART A - AIRPORT OPERATOR CHECKLIST**

Forward: When preparing a solicitation to purchase a carrier vehicle, an airport operator or specification writer should use Part A to identify user requirements and Part B to define the specification to meet these requirements. Part A is important because it tailors the carrier vehicle to the unique requirements of the purchaser, i.e., automatic versus manual transmission, gasoline versus diesel, grooved windshield versus plain etc. Both parts, when combined, become the technical basis for a user's request for proposal.

1. **Anticipated uses and/or features of vehicle.** (Be specific) _____

2. **Performance Requirements.**
 - a. Required Working Speed _____
 - b. Minimum Speed _____
 - c. Turning Radius _____
3. **Engine/Transmission.**
 - a. Automatic _____ Manual _____
 - b. Gasoline _____ Diesel _____
 - c. Number of forward speeds _____
4. **Transfer case.** (choose one)
 - a. Single speed _____ Two speed _____
 - b. Front axle disconnect _____
 Automatic locking differential _____
 Manual locking differential _____
5. **Axle capacities.** Front _____ Rear _____
6. **Fuel capacity** _____ gallons

7. **Auxiliary equipment.** (see Appendix 2) _____

DRAFT

PART B - SPECIFICATION FOR CARRIER VEHICLE

1. Materials and Components. See referenced SAE ARP equipment specification.

2. Delivery.

a. Preparation for Delivery.

(1) **Shipment.** The vendor “seller” is responsible for the safe and timely delivery of the vehicle and its accessories, spare parts, and tools to the agreed place of delivery.

(2) **Marking.** Carrier vehicles shall be marked for shipment in accordance with instructions agreed to by the purchaser.

b. Instruction and Training. The manufacturer shall, at no additional cost, furnish the services of trained personnel to the purchaser at a time and place agreed to by all parties. These individuals shall provide instructions to airport personnel sufficient for the personnel to familiarize themselves with the operational and maintenance characteristics of the carrier vehicle and its auxiliary equipment. The period of instruction shall not be less than 24 hours or as specified in the referenced SAE ARP equipment specification.

This page intentionally left blank.

Appendix 2 - Optional/Alternate Equipment Specification

1. General.

Most snow and ice control equipment is designed to operate under normal winter conditions. At various times, working tolerances and/or severe weather or operating conditions require specialized support equipment to assist the primary unit prior to or during operation. Several of these options are discussed below:

2. Carrier Vehicle.

Equipment to be considered when operating a carrier vehicle at or below -40°F (-40°C) or when the vehicle must be stored outside or in an unheated building is as follows:

a. Engine/Transmission.

- (1) **Engine-jacket water heater.** Recirculating type with thermostatic control and weatherproof receptacle plug (minimum - 1500 watts).
- (2) **Engine oil pan heater.** 300 watts
- (3) **Battery warmer pad.** Approximately 50 - 100 watts per battery
- (4) **Transmission oil pan heater.** Wattage as recommended by the transmission manufacturer

b. Vehicle Cab.

- (1) **Additional door handles.** Handles shall be installed on lower part of vehicle cab door.
- (2) **Auxiliary cab heater and circulating fans.**
- (3) **Mirrors.**
 - (a) Remote control for exterior mirrors.
 - (b) Electrically heated exterior mirrors.
- (4) **Windows.**
 - (a) Grooved windshield.
 - (b) Extra window in lower part of cab doors.
 - (c) Sliding rear windows.
 - (d) Tinted windshield and windows.

(e) Reverse slope windshield.

(5) **Seats.**

(a) Heated driver seat.

(6) **Cab insulation upgrade** (to reduce exterior noise below 85 dBa)

(7) **Air horn.**

c. Mechanical.

(1) **Special starting systems.**

(a) Dual battery system.

(b) Ether cold starting system.

(2) **Permanently installed battery charger.**

(a) Maintenance charging. (0-10 amp capacity)

(b) Automatic cutoff.

(c) Connection.

(i) Weather resistant and chassis mounted.

(ii) Adaptable to 110 volt electrical outlet

(iii) Heavy duty

(iv) 20 amp capacity

(3) **Engine cooling.**

(a) Oversize radiator.

(b) Radiator shutters. (if compatible with engine design)

(4) **Automatic Engine Shutdown.** An automatic engine shutdown system is equipped with an override switch to prevent engine damage due to low engine oil pressure, high coolant temperature, or low coolant level.

(5) **Special Alternator.** Specify drive type, amperage, and voltage.

(6) **All Wheel or Articulated Steering.** For all-wheel steering systems, the rear drive-steer axle shall be controlled in the cab.

(7) **Silicone Hoses.**

d. **Tire Chains.**

e. **Voltage Converter.**

f. **Quick Disconnect Hitches.**

(1) **Automatic/Remote Hitch.** Controls to activate the hitching and unhitching mechanisms shall be located in the vehicle cab. The hitch shall be capable of mating the plow equipment to the carrier vehicle attachment points even when minor angular differences exist between the attachment points and the hitching assembly. An additional hydraulic, pneumatic, or mechanical locking/unlocking device may be installed to ensure safe and positive final coupling. Locking devices shall be activated through the use of existing vehicle power systems.

(2) **Semi-Automatic Hitch.** The initial hook-up between carrier vehicle and hitching device shall be controlled from the vehicle cab with final lock-on accomplished manually at the vehicle/ hitch interface. The hitch shall be capable of initial hook-up even when minor angular differences exist between the plow attachment points and the hitching assembly. All manual locking devices shall ensure a safe and positive final coupling.

3. **High-Speed Rotary Plow.**

a. **Low Temperature Options.**

(1) **Engine-jacket water heater.** (1,000 watt unit)

(2) **Engine oil pan heater.** (300 watt unit)

(3) **Battery warmer pad.** (500 watt unit)

b. **Spot Casting and Loading Chute.**

4. **Snow Plow.**

a. **Moldboard Coatings.** Polyurethane nonstick coatings when applied to the front face of a moldboard will reduce skin friction and prevent snow from sticking onto the moldboard.

b. **Snow Deflector Shield.** A snow deflector shield may be attached to the upper edge of a snow plow moldboard. Attaching devices are hinges, bolts, and acceptable spring-loaded mechanisms.

5. **Material Spreaders.**

a. **Dry Material Spreaders.**

(1) **Vehicle Speed Sensor System.** This system shall automatically regulate and match the material spread rate with vehicle speed. Operation of the system shall be from the vehicle transmission or directly by auxiliary tire traction. The system shall include an automatic material cut-off.

(2) **Belt over Chain.** Attached to the standard conveyor chain, the belt provides a more positive delivery of product to spinner resulting in a more uniform spreading pattern.

(3) **Load Choker.** An inverted “V” type adjustable load choker will reduce the load pressure on the conveyor system of larger spreaders.

(4) **Cab Shield.** Shield projects from top of leading edge of the spreader over the truck cab. Its function is to protect against spillage of material on cab and drive train of carrier vehicle during loading.

(5) **Chain Oiler.** Oiler operates by gravity flow and keeps conveyor chain oiled during operation.

(6) **Hopper Cover.** Cover runs the full length of the hopper and protects the load from the elements.

(7) **Catwalks.**

(8) **Mud Flaps.**

b. Liquid Material Spreaders.

(1) **Calibration System.** The calibration system shall consist of a control console, a sensor control valve, a ground speed sensor, and an application rate sensor. It shall maintain a uniform application rate at all normal carrier vehicle application speeds with the entire width of boom or any combination of sections thereof.

(2) **Flusher Unit.** A flusher unit shall have four broad fan nozzles capable of delivering 150 gpm at 50 psi.

(3) **Quick Disconnect Hitch.** A quick disconnect hitch for a snow plow should be considered when purchasing a self-contained spreader unit.

Appendix 3 - High-Speed Rotary Plow Specification

PART A - AIRPORT OPERATOR CHECKLIST

Forward: When preparing a solicitation to purchase a rotary plow, an airport operator or specification writer should use Part A to identify user requirements and Part B to define the specification to meet these requirements. Part A is important because it tailors the high-speed rotary plow to the unique requirements of the purchaser, i.e., single-stage versus two-stage, solid auger versus turbine impeller etc. Both parts, when combined, become the technical basis for the user's request for bid proposal.

1. **Anticipated uses and/or features of high-speed rotary plow.** (Be specific) _____

2. **Size of Priority 1 paved area** _____ square feet (m²)

3. **Capacity** _____ tons/hr

4. **Casting Distance** _____ ft(m) @ Snow weight (density) of _____ lb/ft³(kg/m³)

5. **Anticipated Speed of Operation** _____ mph (km/h)

6. **Unique Conditions/Problems/Obstructions** (if any)

7. **Other/Optional Equipment**

PART B – HIGH-SPEED ROTARY PLOW SPECIFICATION

1. See paragraph 3.3 of this AC.
2. High-speed rotary plows and carrier vehicles shall be in accordance with SAE ARP 5539, Rotary Plow with Carrier Vehicle.
 - a. Additional Federal AIP/PFC specification requirements for SAE ARP 5539 follow:
 - (1) For carrier vehicle controllability and safety, all-wheel drive shall be standard.

Appendix 4 – Snow Plow Specification

PART A - AIRPORT OPERATOR CHECKLIST

Forward: When preparing a solicitation to purchase a snow plow, an airport operator or specification writer should use Part A to identify user requirements, and Part B to define the specification to meet these requirements. Part A is important because it tailors the snow plow to the unique needs of the purchaser, i.e., type of plow desired, type of moldboard, plow shoes versus caster wheels etc. Both parts, when combined, become the technical basis for a user's request for bid proposal.

1. **Anticipated uses and/or features of snow plow.** (Be specific) _____

2. **Size of Priority 1 paved area** _____ square feet (m²)
3. **Type of Plow Preferred** _____

4. **Plow length** _____ ft (m), **height** _____ ft (m), **width** _____ ft (m)
5. **Anticipated Speed of Operation** _____ mph (km/h)
6. **Unique Conditions/Problems/Obstructions that may be encountered** _____

7. **Typical Snow Conditions** _____

8. **Moldboard** _____ **steel** _____ **non-steel**
9. **Other/Optional Equipment** _____

PART B – SNOW PLOW SPECIFICATION

1. Snow plows and carrier vehicles shall be in accordance with SAE ARP 5943, Snowplows and Hitches. See paragraph 2 below for snow baskets and snow buckets.

a. Additional Federal AIP/PFC specification requirements for SAE ARP 5943 follow:

(1) For carrier vehicle controllability and safety, all-wheel drive shall be standard.

(2) Under paragraph 4.1.1.(c), the plow manufacturer shall provide the airport sponsor certification for the polyethylene moldboard material.

(3) Under paragraph 4.2.1, the overall width of the plow assembly in the folder position (wings retracted) with required casters shall allow enter into the Federally funded snow removal building (AC 150/5200-18) that houses the snow plow and other such equipment.

2. Snow Bucket and Snow Basket

a. Snow Bucket.

(1) **Geometry.** The capacity of a front mounted bucket shall range anywhere from 3 to 8 yd³ (2.4 to 6.2 m³) depending upon the type of snow removal operation

(2) **Features.** The bucket shall be made of welded construction using high-strength, wear resistant steel plate, and bracing. It shall be equipped for mounting on a wheel loader or an industrial 4×4 tractor. The installed bucket shall be capable of sustaining a level load while being tilted 20° in the forward and transverse position. It shall be equipped with a quick coupler hitch for swift changeovers. Snow buckets may have a built up bottom of abrasion resistant steel to improve wear life.

b. Snow Basket.

(1) **Geometry.** The front-mounted basket width shall range from 8 to 17 feet (2.4 to 5.2 m). The basket hitching assembly shall be designed for easy mounting on a wheel loader or an industrial 4×4 tractor.

(2) **Features.** The basket shall have the same pick up and discharge characteristics as a snow bucket, e.g., capable of being tilted a minimum of 20 degrees in a forward or transverse position with a level load. It shall have a quick coupler hitch for swift changeovers. Baskets shall be welded using flexible high strength wear resistant steel weaving over a steel frame. Construction shall be of minimum weight capable of withstanding the rigorous stress of loading and unloading. Snow baskets may have a built-up bottom of abrasion resistant steel to improve wear life.

Appendix 5 - Material Spreader Specification

PART A - AIRPORT OPERATOR CHECKLIST

Forward: When preparing a solicitation to purchase a spreader system, an airport operator or specification writer should use Part A to identify user requirements and Part B to define the specification to meet these requirements. Part A is important because it tailors the spreader to the unique preferences of the purchaser, i.e., special lighting, hopper/tank sizes, desired carrier vehicle cab features, unique safety equipment etc. Both parts, when combined, become the technical basis for a user's request for bid proposal.

A. Solid Material Spreader.

1. **Anticipated uses and/or features of spreader.** (Be specific) _____

2. **Size of Priority 1 paved area** _____ square feet (m^2)
3. **Size of hopper** _____ cubic yd (m^3)
4. **Material to be Spread** _____
5. **Critical Application Rate** _____ ounces/ yd^2 (gr/m^2)
6. **Time Needed to Complete Major Operation** _____ minutes
7. **Proximity to Loading Farm** _____ minutes
8. **Capacity of Loading Farm** _____ tons
9. **Other** _____

B. Liquid Spreader

1. **Anticipated uses and/or features of spreader.** (Be specific) _____

2. **Size of Priority 1 paved area** _____ square feet (m^2)
3. **Size of Tank** _____ gal (liters)
4. **Critical Application Rate** _____ ounces/1000 ft^2 (liters/1000 m^2)
5. **Time Needed to Complete Major Operation** _____ minutes
6. **Proximity to Loading Farm** _____ minutes
7. **Capacity of Loading Farm** _____ gallons(liters)
8. **Other** _____

PART B - MATERIAL SPREADER SPECIFICATIONS

1. Solid Material Spreader Components

a. Sand and solid deicing/anti-icing material spreaders shall be in accordance with SAE ARP 6059, Solid Deicing/Anti-icing Material Spreader for Airport Application. Regarding a specification for liquid spreaders, SAE G15 is finishing draft SAE ARP 5559, Liquid Deicing/Anti-icing Material Spreader for Airport Application. This AC will reference that aerospace recommended practice upon its issuance by SAE. Until then, the carrier vehicle for liquid spreaders complies with SAE ARP 6059 and the liquid spreader shall comply with paragraph 2 below.

2. Liquid Material Spreader Components

a. **Standard Equipment.** A liquid material spreader shall have the following standard equipment:

(1) **Hydraulic System.** The spreader hydraulic system shall meet the basic requirements of the carrier vehicle system under SAE ARP 6059. The system shall also be capable of supplying the power to operate the deicing pumps, to fold the booms, and to turn the spreader on and off.

(2) **Tank.** The tank shall be constructed of grade 304 stainless steel or better. Optional construction, using polymer or fiberglass materials, is acceptable providing that the manufacturer certifies that the materials used are capable of meeting the same stress and fatigue requirements as their stainless steel counterparts. The shell, head, and baffles of steel tanks whose capacity is 2000 gallons (7570 l) or less shall be made of at least 12-gauge material. For tanks whose capacity is greater than 2000 gallons (7570 l), these components shall be made of 10-gauge material. Sills for all tanks should be no less than 8-gauge and they shall also be made of grade 304 stainless steel. Baffle spacing for any tank should not be more than 44 inches (112 cm). Tanks shall be equipped with a manhole opening to allow inspection of the tank interior.

(3) **Pumping System.** The pumping system must have sufficient capacity for full boom width spraying at a maximum discharge rate of 3 gallons/1000 square feet while operating at a speed of 30 mph.

(4) **Spray Boom and Nozzles.** The spray boom shall be constructed in sections with each section capable of independent use. Boom design shall permit it to break away when an object is struck. Spray nozzles shall be equipped with check valves and be located to provide uninterrupted surface coverage. Filters shall be installed on lines leading to the spray booms.

b. **Services.** All spreader drive components shall have a minimal number of lubrication points with easy access for maintenance. The spreader shall receive lubrication prior to delivery with lubricants designated for use in the winter conditions normally experienced at the delivery location. The spreader shall be conspicuously tagged to identify the lubricants and their temperature ranges.

This page intentionally left blank.

Appendix 6 - Airport Runway Broom with Airblast Specification

PART A - AIRPORT OPERATOR CHECKLIST

Forward: When preparing a solicitation to purchase an airport runway broom with airblast an airport operator or specification writer should use Part A to identify user requirements and Part B to define the specification to meet these requirements. Part A is important because it tailors the airport runway broom with airblast to the unique preferences of the purchaser, i.e., special lighting, pushed versus pulled equipment, type of airblast system, unique safety equipment etc. Both parts, when combined, become the technical basis for a user's request for bid proposal.

1. Anticipated uses and/or features of brooms with airblast. (Be specific) _____

2. Size of Priority 1 paved area to be swept _____ ft² (m²).
3. Critical time required to sweep primary surface areas _____ Minutes
4. Sweeper speed needed to meet critical time _____ mph (km/h)
5. Type of sweeper desired (Pushed / Pulled) _____
6. Airblast system _____

7. Size of broom _____ length _____ diameter _____
8. Type of brush _____ wire _____ polypropylene _____ poly/wire
9. Brush Geometry _____ wafer _____ tufted wire _____ cassette
10. Optional equipment _____

11. Other _____

PART B - AIRPORT RUNWAY BROOMS WITH AIRBLAST SPECIFICATION

- 1.** Airport Runway Broom with Airblast shall be in accordance with SAE ARP 5564, Airport Runway Brooms.
- 2. Optional Equipment.** Sweepers are designed to operate under normal winter conditions. To improve equipment effectiveness, however, certain options are available to the purchaser that can enhance performance. Typical options are the following:
 - a.** Airblast System. See paragraph 2-8.
 - b.** Quick Disconnects. Quick disconnects may be provided for all controls, hydraulic hoses/lines, electrical cables, drivelines, and instrumentation.
 - c.** Foam Filled Tires. Foam filled tires provide increased tire resistance to side loads during tight turns and other stressful tire loadings.
 - d.** Dual Front Fork Wheels. Dual wheels are available as additional steering safety on towed sweepers.
 - e.** Fenders. Noncorrosive fenders and mud flaps help control snow, slush and water by helping to keep them off of the sweeper.
 - f.** Hydrostatic and Hydraulic Test Equipment. This equipment allows trouble shooting of hydrostatic and hydraulic systems.
 - g.** Hydraulic Jack.
 - h.** Maintenance Free Batteries.
 - i.** Air Brakes for Towed Sweepers.
 - j.** Automatic Low Oil Pressure/High Water Temperature Shut Down devices.
 - k.** Fire Extinguisher.
 - l.** Engine temperature and hydrostatic pressure loss warning devices.
 - m.** Mud flaps for caster wheels.