FEDERAL AVIATION ADMINISTRATION FLIGHT STANDARDS SERVICE CHARTED VISUAL FLIGHT PROCEDURE (CVFP)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL Altitudes are minimum altitudes unless otherwise indicated Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statue miles or feet RVR unless otherwise indicated.

AIRPORT ID	CVFP NAME	ORIG/AMDT	CITY	<u>STATE</u>	SUPERSEDES	AMDT NO.	DATED	EFFECTIVE DATE
Norman Y Mineta San Jose Intl	Fairgrounds Visual Runways 30L/R	8	San Jose	CA	Fairgrounds Visual Runways 30L/R	7	16 Jul 16	17JUNE2021
VISUAL ARRIVAL ROUTE	<u> </u>							
FROM (Visual Landmarks)		TO Visual Landmarks)		COURSE (if desired	ALTITUDI	ALTITUDE (if needed) Show if for Class B		
Lexington Reservoir		Shopping Mall		For turbo-jet aircrate west-northwest.		At or above 5000 until crossing Highway 17 for noise abatement.		
WEATHER MINIMA.		Santa Clara County Fairgrounds	3	When cleared for F aircraft should turn DME for noise aba		2500 Recommended on leg between Lexington Reservoir and Shopping Mall.		

WEATHER MINIMA:

CEILING: 2500 VISIBILITY: 5

NOTES:

Radar Required

Closely spaced parallel visual approaches may be in progress to Runways 30L/R.

In the event of a go-around on Runway 30L, proceed straight-ahead heading 300°, or on Runway 30R, turn right heading 120°, climb and maintain 4000, or as directed by ATC.

SUPPLEMENTARY NAVAID / WAYPOINT INFORMATION AND ADDITIONAL LANDMARKS:

YADUT Waypoint, JILNA waypoint, I-SJC LOC, Reid-Hillview of Santa Clara County Airport, Moffett Federal Airfield, City of Saratoga grid, City of Los Gatos grid, Mount Umunhum, Santa Clara County Fairgrounds as depicted on attached graphic, tanks as depicted on attached graphic, park as depicted on attached graphic, Santa Cruz Mountains as depicted on attached graphic, transmission lines as depicted on attached graphic graphic, freeways as depicted on attached graphic

VERTICAL GUIDANCE NAVAID AND ANGLE: LOC I-SJC (GS 3.00°)

DESCRIPTION OF ROUTE:

FROM WEST-NORTHWEST: From over Lexington Reservoir northeast to Shopping Mall at Hi-ways 85/87 then to a turn onto final southeast of Fairgrounds and adjoining memorial park (see graphic)

COMMUNICATION:

D-ATIS 126.95, NORCAL APP CON 120.1 290.25, San Jose Tower 124.0 (CTAF) 257.6, GRND CON 121.7, CLNC DEL 118.0, CPDLC UNICOM 122.95


OVALITY 10 CHECKED

FEDERAL AVIATION ADMINISTRATION FLIGHT STANDARDS SERVICE CHARTED VISUAL FLIGHT PROCEDURE (CVFP)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL Altitudes are minimum altitudes unless otherwise indicated Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statue miles or feet RVR unless otherwise indicated.

AIRPORT ID	CVFP NAME	ORIG/AMDT	<u>CITY</u>	<u>STATE</u>	<u>SUPERSEDES</u>	AMDT NO.	DATED	EFFECTIVE DATE
	Fairgrounds Visual Runways 30L/R	8	San Jose	CA		7	16 Jul 16	17JUNE2021

GRAPHIC DEPICTION:

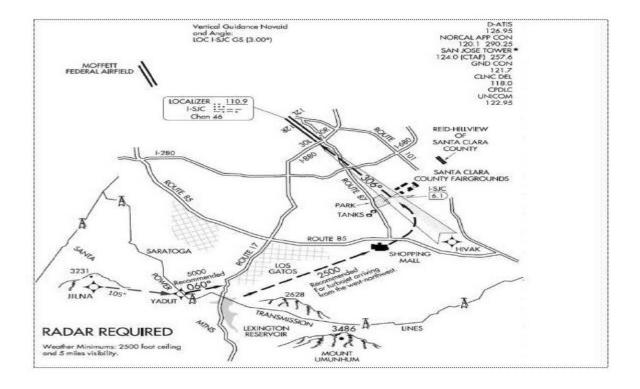

ONALITY 10 CHECKED

FEDERAL AVIATION ADMINISTRATION FLIGHT STANDARDS SERVICE CHARTED VISUAL FLIGHT PROCEDURE (CVF

CHARTED VISUAL FLIGHT PROCEDURE (CVFP)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statue miles or feet RVR unless otherwise indicated.

AIRPORT ID	CVFP NAME	ORIG/AMDT	CITY	STATE SUPERSEDES		AMDT NO.	DATED	EFFECTIVE DATE
	Fairgrounds Visual Runways 30L/R	8	San Jose	CA		7	16 Jul 16	17JUNE2021
FLIGHT INSPECTO	ORITE		ORGANIZATION: FICO	DATE: 3/12/2021	FLIGHT INSPECTION SIGNATURE:	Digitally signed by JON DENTON Mar 15, 2021		
,	BARBARA GORMAN)		AJV-A432	1/20/2020	DEVELOPED BY SIGNATURE:	Digitally signed by JON DENTON		
APPROVED BY:					APPROVED BY	Mar 15, 2021		
LONNIE EVERH	ART		AJV-A430		SIGNATURE:	Digitally signed by JON DENTON		
CHANGES - REA	ASONS:					Mar 15, 2021		
Addad III NA wa	who int to the hearinging of the procedure. Co	annacta tha Fairera	unda Marial Dunia 201 /D t	a tha DDIVV Arrive	al revision			

Added JILNA waypoint to the beginning of the procedure - Connects the Fairgrounds Visual Rwys 30L/R to the BRIXX Arrival revision. Removed "5000 Recommended at YADUT/heading 060." Added "At or above 5000 until crossing Highway 17 for noise abatement." - Per FPT.

ONALITY 10 CHECKED