


AL-6677 (FAA)

UNICOM (CTAF)  
123.0  
AUSTIN DEP CON  
119.0 370.85

TOP ALTITUDE:  
ASSIGNED BY ATC

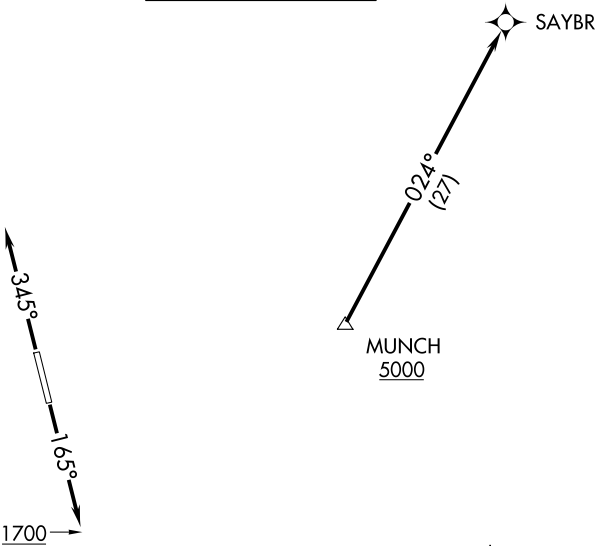

NOTE: RADAR required.  
NOTE: DME/DME/IRU or GPS required.  
NOTE: RNAV 1.  
NOTE: Takeoff Rwy 16 requires a climb to 1700 on heading 165° prior to turning for obstacle avoidance.  
NOTE: For DFW terminal area arrivals at FL230 or below only.

TAKEOFF MINIMUMS

Rwy 34: Standard.  
Rwy 16: 500-2¾ or standard with minimum climb of 265' per NM to 1500.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 16: Climb on heading 165° to 1700, then as assigned by ATC for vectors to cross MUNCH at or above 5000, thence. . . .  
TAKEOFF RUNWAY 34: Climb on heading 345° or as assigned by ATC for vectors to cross MUNCH at of above 5000, thence. . . .

. . . .on track 024° to SAYBR. Maintain altitude assigned by ATC.  
Expect filed altitude 10 minutes after departure.

SC-3, 04 SEP 2025 to 02 OCT 2025

SC-3, 04 SEP 2025 to 02 OCT 2025