

APP CRS
120°

Rwy Ldg	7000
TDZE	1225
Apt Elev	1249

RNAV (RNP) RWY 12

PANGBORN MEML (EAT)



For uncompensated Baro-VNAV systems, procedure NA below -10°C (14°F) or above 54°C (130°F). RF required. GPS required. FD or HUD required.

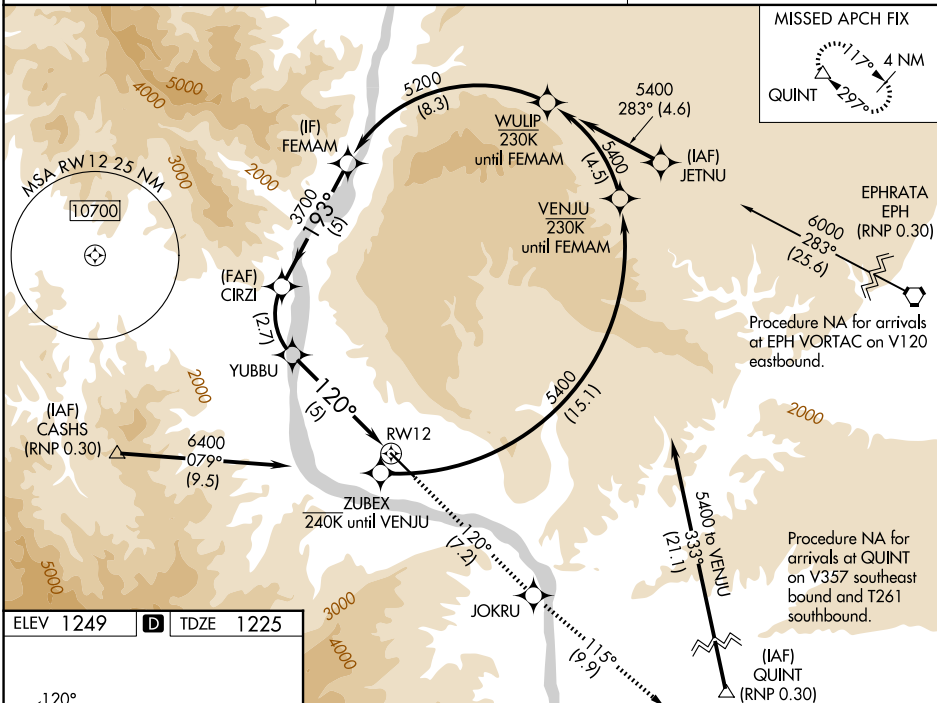


MISSED APPROACH: Climb to 5400 on track 120° to JOKRU and on track 115° to QUINT and hold.

*Missed approach requires a minimum climb of 319 feet per NM to 3700.
#Missed approach requires a minimum climb of 295 feet per NM to 3700.


ASOS
119.925

SEATTLE CENTER
126.1

UNICOM
123.0 (CTAF) **L**

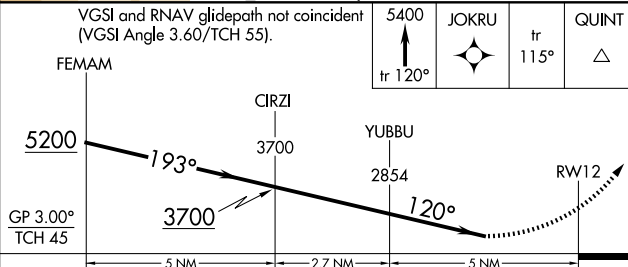
ELEV 1249

D	TDZE
---	------

REIL Rwy 30 **L**

HIRL Rwy 12-30 (L)

VGSI and RNAV glidepath not coincident (VGSI Angle 3.60/TCH 55).



CATEGORY	A	B	C	D
RNP 0.15 DA*	1995-3		770 (800-3)	
RNP 0.19 DA#	2072-3		847 (900-3)	
RNP 0.30 DA	2417-5		1192 (1200-5)	

AUTHORIZATION REQUIRED

RNAV (RNP) RWY 12