



WAAS Quick Facts

Using WAAS, aircraft can access over 3,000 runway ends in poor weather conditions with minimums as low as 200 feet. WAAS can even get you into places where the Instrument Landing System (ILS) may not be available. In addition to its unprecedented benefits related to airport access, WAAS also offers a number of other benefits. There are now twice as many WAAS procedures (LPVs and LPs) as there are ILS glide slopes in the U.S. National Airspace System.

WAAS LPVs Provide Similar Level of Service to Category I ILS

- Vertical guidance
- Glidepath more stable than that of ILS
- Minimums as low as 200 feet, which is lower than all Required Navigation Performance (RNP) Authorization Required (AR) approaches and all conventional (e.g. VOR, NDB) non-precision approaches

- WAAS provides two additional ranging sources (from WAAS GEOs)
- Enables extension of terminal mode operations for both departure and arrival to beyond 30 nautical miles from the airport reference point
- Increased accuracy and availability
- Eliminate critical ILS area
- ADS-B enabler

WAAS LPVs Outnumber Category I ILS Approaches Within the U.S.

As of April 2, 2015:

- 3,534 published LPVs
- Serving 1,725 airports
- 1,639 LPVs serving 983 non-ILS airports
- FAA is adding more new WAAS procedures each year

GPS/WAAS Technical Standard Orders


TSO-C145c - "Airborne Navigation Sensors Using the GPS Augmented by the Satellite-Based Augmentation System"

TSO-C146c - "Stand-Alone Airborne Navigation Equipment Using the GPS System Augmented by the Satellite-Based Augmentation System"

Benefits of WAAS compared with GPS for Flight Planning, Terminal and Enroute Operations

- Allows use of LNAV/VNAV minima without temperature restrictions
- Provides vertically-guided approach procedures capability at airports that do not have ground-based navigational aides (Some infrastructure upgrades may be required to get the best possible minimums. More information is available in "Maximizing Airport Operations Using the Wide Area Augmentation System" available at <http://gps.faa.gov>.)
- Is not affected by snow reflections that can impact ILS operations
- Allows RNAV (GPS) approaches to be used for alternate airport flight planning
- Increases number of alternate airport options which improves flight planning flexibility
- Satisfies equipment requirements for 'T' and 'Q' routes (meets SFAR 97 in Alaska)
- Eliminates RAIM check requirement per AC 90-100A

To access a current coverage map, go to <http://gps.faa.gov> and click on "Real-time WAAS Coverage" in the sliding banner of image links (In the News) near the top of the page

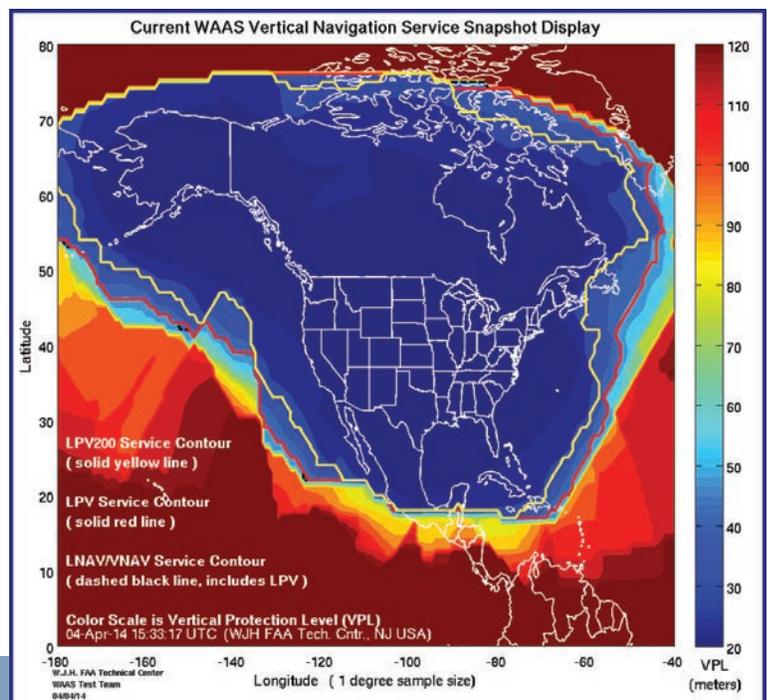

Wide Area Augmentation System (WAAS)


LPV Approaches Enabled by a WAAS Receiver

The Localizer Performance with Vertical guidance (LPV) procedure takes advantage of the accuracy of WAAS to provide an instrument approach procedure equivalent to a Category I ILS approach. While an LPV approach looks and flies like an ILS approach, it provides the pilot with more stable vertical guidance. An LPV approach can provide minimums as low as 200 feet at qualifying airports.

WAAS LP Approaches Introduced

The new Localizer Performance (LP) procedures can often provide lower minima than lateral navigation (LNAV) procedures due to the narrower Obstacle Clearance Surface (OCS). The smaller LP OCS footprint provides greater potential for avoiding more obstructions in the final approach segment that would otherwise require the minima to be higher. LPs will be published at locations where the terrain or obstructions do not allow publication of LPV procedures. As of April 2, 2015 there are 586 LPs serving 423 airports, 480 of those serving 345 non-ILS airports.

NOTE - WAAS receivers certified prior to TSO C-145b and TSO C-146b, even if they have LPV capability, do not contain LP capability unless the receiver has been upgraded. Receivers capable of flying LP procedures must contain a statement in the Flight Manual Supplement or Approved Supplemental Flight Manual stating that the receiver has LP capability, as well as the capability for the other WAAS and GPS approach procedure

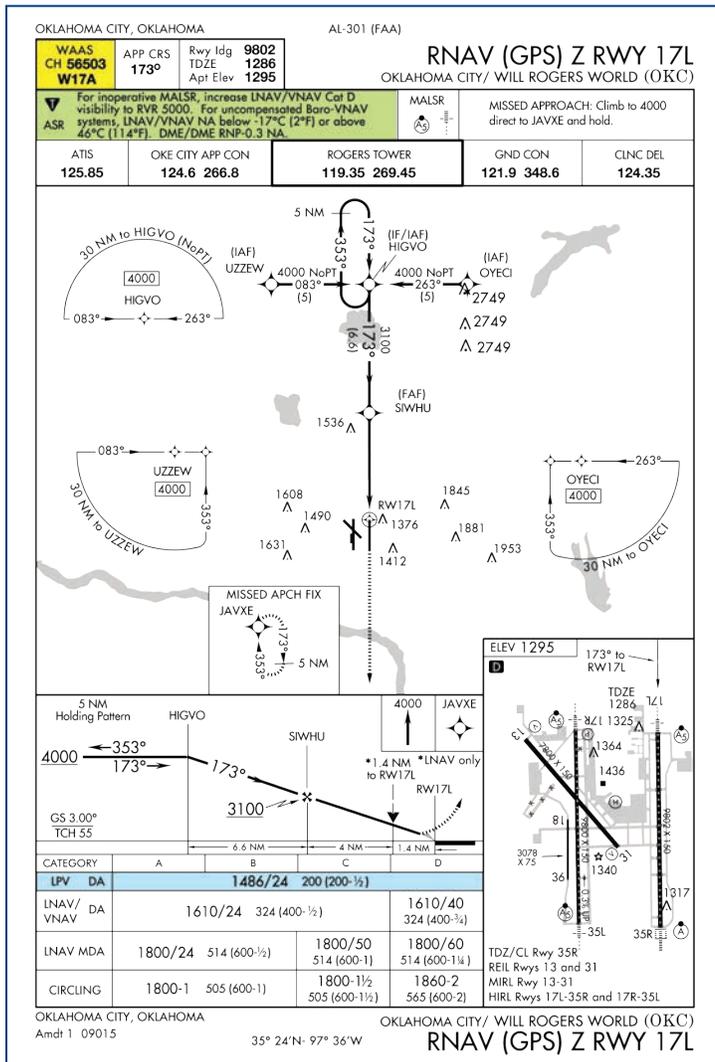

Important RNAV Approach Information

WAAS
CH 56503
W17A

WAAS Channel Number: CH **56503**

WAAS Approach ID: **W17A**

W: WAAS

17: Runway 17L

A: 1st WAAS Approach to RWY 17L

ASR For inoperative MALSR, increase LNAV/VNAV Cat D visibility to RVR 5000. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA.

Temperature Restriction does not apply to WAAS equipment

LPV	DA	1486/24	200 (200-½)
-----	----	---------	-------------

LPV Minimum Line (flown with WAAS receiver only)

How to Request an LPV or LP Approach at Your Airport

Click on the header above or go to <http://gps.faa.gov> and type "request an LPV" in the search box.

Where to Find Listing of Airports with LPV and LP Approaches

Click on the header above or go to <http://gps.faa.gov> and click on "GPS/WAAS Approaches" in the sliding banner of image links (In the News) near the top of the page.

<http://gps.faa.gov>