WAAS CH 93819 W18A	APP CRS **357°**	Rwy ldg **9503** TDZE **25** APT Elev **25**

RNAV (GPS) RWY 36

MYRTLE BEACH INTL (KMYR)

RNP APCH - GPS.

FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -15°C OR ABOVE 54°C. INOPERATIVE TABLE DOES NOT APPLY TO LPV. FOR INOPERATIVE ALS, INCREASE LNAV CATS C, D VISIBILITY TO 1 3/8 SM.

MISSED APPROACH:
CLIMB TO 2000 DIRECT PEDEE AND HOLD.

ATIS	MYRTLE BEACH APP CON ★	MYRTLE BEACH TOWER ★	GND CON	CLNC DEL	UNICOM
123.925	(171° - 321°) **127.4 257.95** (322° - 170°) **119.2 350.3**	**128.45** (CTAF) **259.3**	**120.3 275.8**	**120.3**	**122.95**

PROTOTYPE-NOT FOR NAVIGATION

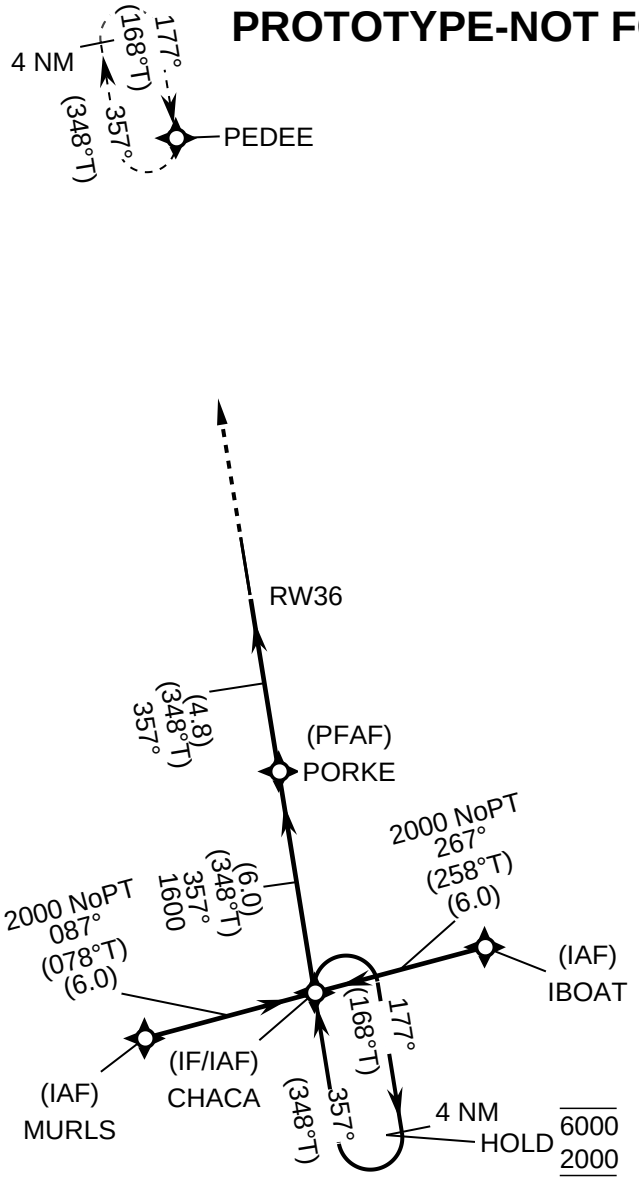

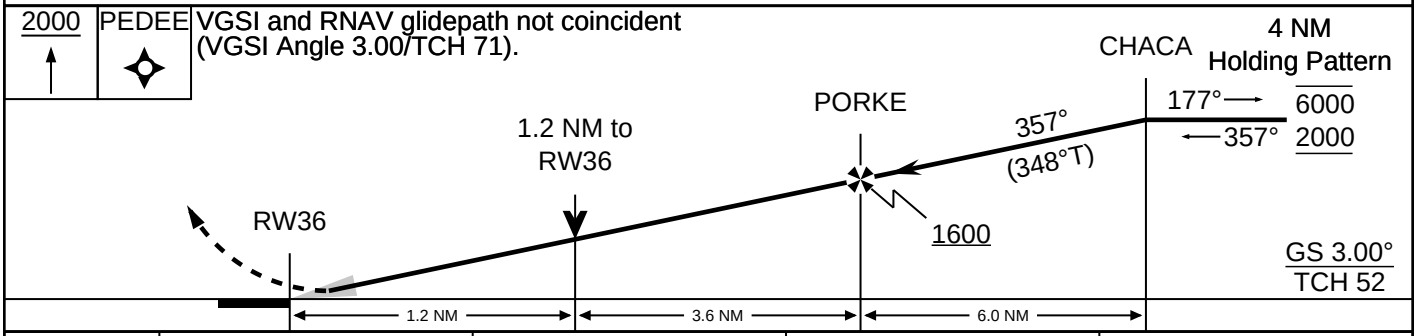

CATEGORY	A	B	C	D
LPV	225-4000 200			
LNAV/VNAV	374-4000 349			
LNAV	480-4000 455		480-5500 455	
CIRCLING	560-1 535		700-2 675	700-2 1/4 675