

WAAS CH 97533	APP CRS 193°	Rwy Ldg TDZE Apt Elev	3200 857 858
-------------------------	------------------------	-----------------------------	---

RNAV (GPS) RWY 19

KEWANEE MUNI (EZI)


RNP APCH - GPS.

▼ Baro-VNAV NA. Use GBG altimeter setting; when not received, use MLI altimeter setting and increase LPV DA to 1212 feet; increase LNAV/VNAV DA to 1446 feet and all visibilities $\frac{1}{8}$ SM.
▲ NA Increase all MDAs 40 feet and LNAV visibility Cat C $\frac{1}{8}$ SM, and Circling visibility Cat C $\frac{1}{4}$ SM.


MISSED APPROACH:
Climb to 2500 direct JUBDI and hold.

QUAD CITY APP CON ★
133.275 257.8


UNICOM
122.8 (CTAF) 0

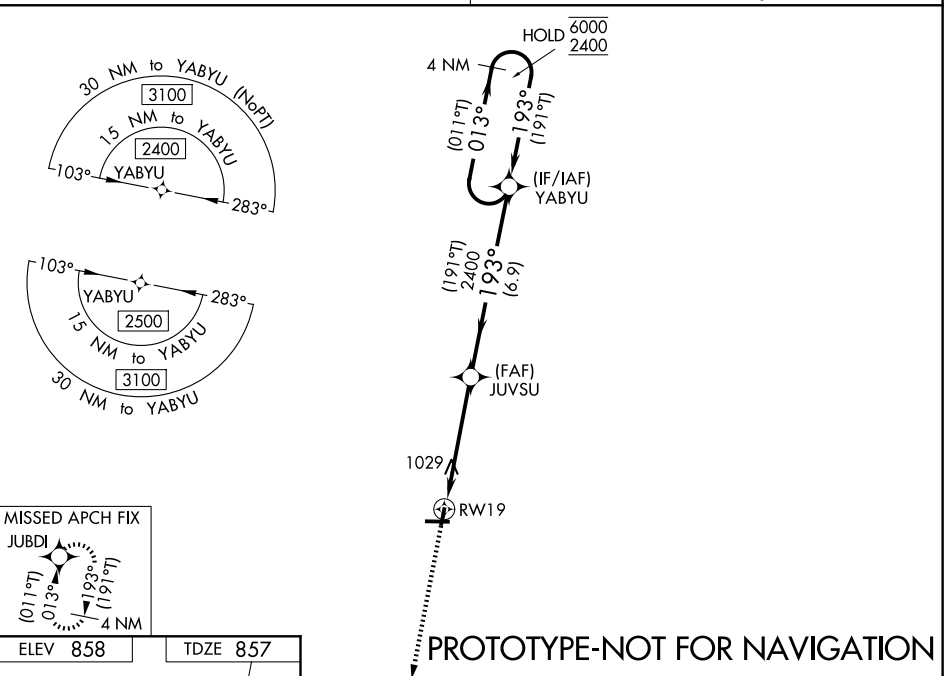

ELEV 858	TDZE 857
----------	----------



PROTOTYPE-NOT FOR NAVIGATION

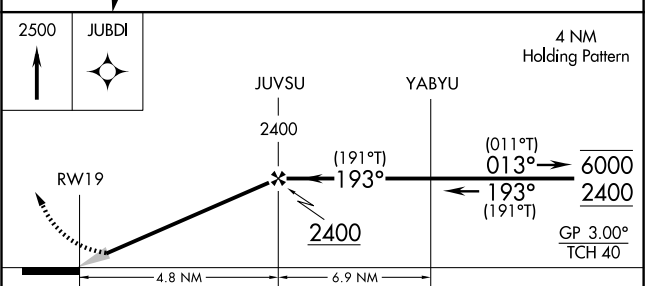

CATEGORY	A	B	C	D
LPV DA		1182-1 325 (400-1)		NA
LNAV/VNAV DA		1416-1 $\frac{5}{8}$ 559 (600-1 $\frac{5}{8}$)		NA
LNAV MDA	1400-1	543 (600-1)	1400-1 $\frac{5}{8}$ 543 (600-1 $\frac{5}{8}$)	NA
CIRCLING	1400-1 542 (600-1)	1520-1 662 (700-1)	1520-1 $\frac{3}{4}$ 662 (700-1 $\frac{3}{4}$)	NA