
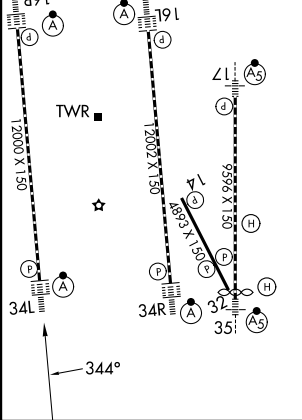


APP CRS	Rwy Ldg	12000
344°	TDZE	4229
	Apt Elev	4231

RNAV (RNP) Z RWY 34L
SALT LAKE CITY INTL (SLC)

RNP AR APCH - GPS. Authorization required. From PEFNO: RF.	ALSF-2	MISSED APPROACH: Climb to 4800 then climbing left turn to 8100 direct STACO and hold. *Missed approach requires minimum climb of 250 feet per NM to 4700.
For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.10, RNP 0.20 visibility all Cats to RVR 4500, RNP 0.30 visibility all Cats to RVR 6000.		

D-ATIS 124.75 125.625	SALT LAKE CITY APP CON 125.7 284.6	SALT LAKE CITY TOWER 132.65 336.4	GND CON 123.775 348.6
--------------------------	---------------------------------------	--------------------------------------	--------------------------

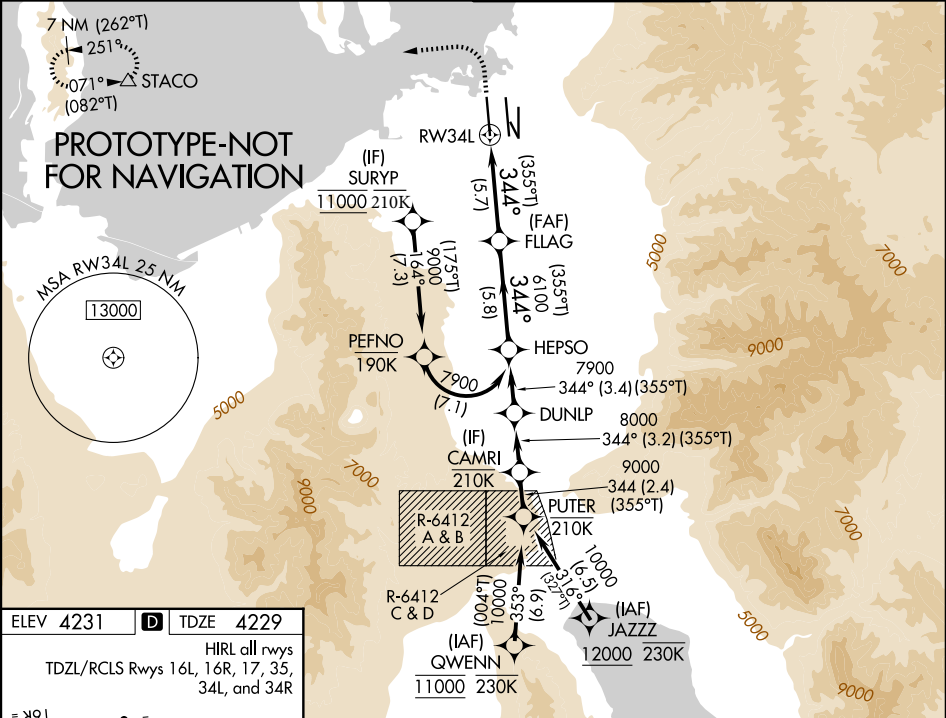

4800	8100	STACO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).	HEPSON
See planview for multiple IF locations.				
RW34L				
FLAG				
HEPSON				
GP 3.00°				
TCH 55				
5.7 NM				
5.8 NM				
CATEGORY	A	B	C	D
RNP 0.10 DA*	4490/24 261 (300-1/2)			
RNP 0.20 DA	4530/24 301 (300-1/2)			
RNP 0.30 DA	4643/40 414 (500-3/4)			
AUTHORIZATION REQUIRED				