

WAAS CH 50133 W11A	APP CRS 105°	Rwy Ldg TDZE Apt Elev	3302 1183 1183
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 11


PAYNESVILLE MUNI (PEX)

RNP APCH - GPS.



⚠ Baro-VNAV and VDP NA when using Lf altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Lf altimeter setting and increase LPV DA to 1434 feet; increase LNAV/VNAV DA to 1704 feet and all visibilities 1/8 SM. Increase all MDAs 60 feet and LNAV and Circling visibility Cat C 1/4 SM.

MISSED APPROACH:
Climb to 3000 direct
UDALE and hold.

AWOS-3PT 120.35	MINNEAPOLIS CENTER 125.5 323.1	CTAF 122.9
---------------------------	--	----------------------

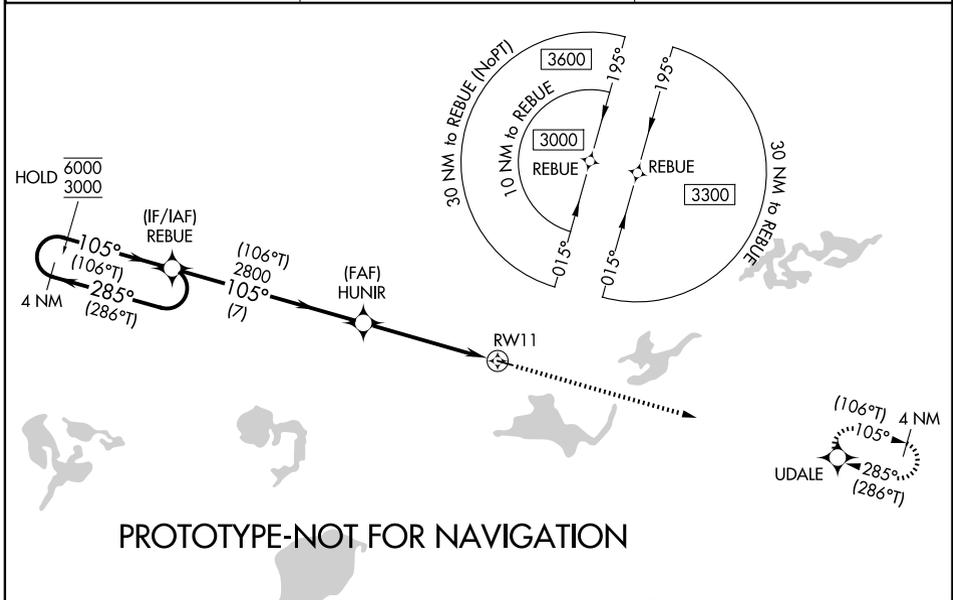

ELEV 1183	TDZE 1183
-----------	-----------

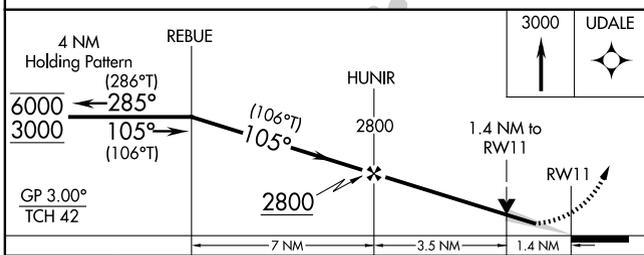

CATEGORY	A	B	C	D
LPV DA	1383-1 200 (200-1)			NA
LNAV/VNAV DA	1653-1 470 (500-1 3/8)			NA
LNAV MDA	1680-1 497 (500-1)		1680-1 497 (500-1 3/8)	NA
CIRCLING	1680-1 497 (500-1)	1760-1 577 (600-1)	1920-2 737 (800-2)	NA

MIRL Rwy 11-29 **Ⓛ**
REIL Rws 11 and 29 **Ⓛ**