


WAAS CH <b>82410</b> <b>W23A</b>	APP CRS <b>233°</b>	Rwy Ldg TDZE Apt Elev	<b>5028</b> <b>623</b> <b>626</b>
----------------------------------------	------------------------	-----------------------------	-----------------------------------------



# RNAV (GPS) RWY 23

LAKE COUNTY EXEC (LNN)

RNP APCH - GPS.		MISSED APPROACH: Climb to 1400 then climbing right turn to 2300 direct NEVTE and hold.
<p><b>▼</b> Rwy 23 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C or above 54°C.</p> <p><b>▲</b></p>		
AWOS-3PT <b>119.225</b>	CLEVELAND APP CON <b>125.35 346.325</b>	UNICOM <b>122.725 (CTAF) 0</b>

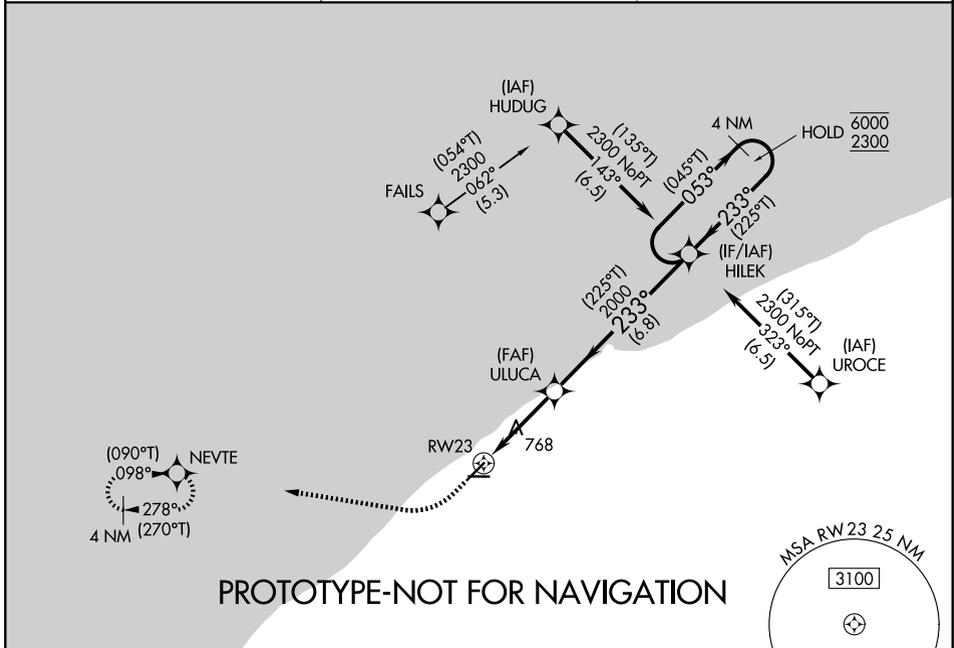

PROTOTYPE-NOT FOR NAVIGATION

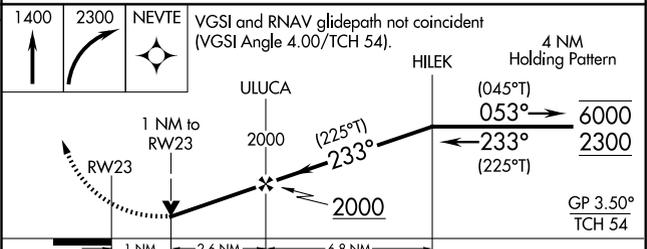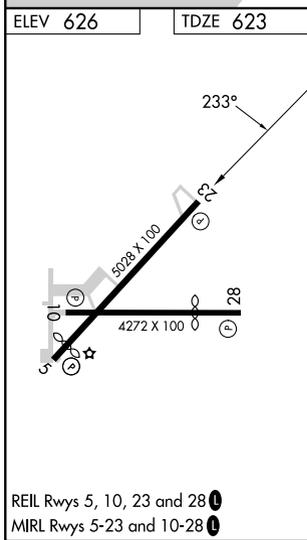

CATEGORY	A	B	C	D
LPV DA	980-1	357 (400-1)		NA
LNAV/VNAV DA	1015-1 1/8	392 (400-1 1/8)		NA
LNAV MDA	1080-1	457 (500-1)	1080-1 3/8 457 (500-1 3/8)	NA
CIRCLING	1080-1 454 (500-1)	1200-1 574 (600-1)	1520-2 3/4 894 (900-2 3/4)	NA