


Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 10/07/2021	APWS Task ID: 186DDF08B93B4C1F8A3FDDC6147DD1F4	APWS Project ID: A28BB93908BD4F8B8DF0A9DB34847720
Procedure: RNAV (GPS) RWY 4R AMDT 1F		Enroute: NO	Specialist: Bradshaw, Henry		Agreement Number:
Airport ID: KLIT			Airport City: LITTLE ROCK		State: AR
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: UPDATE LNAV/VNAV CONTROLLING OBSTACLE FROM "TREE (KLIT0137) 437 MSL" TO "TREE (05-078627) 451 MSL". PROCESSED IAW AIRCRAFT OPERATIONS GROUP (AJF-1000) MEMO, DATED JUNE 4, 2020, SUBJECT: FLIGHT INSPECTION OF NEW CONTROLLING OBSTACLES. ACTIVE DATA USED FOR AIRPORT AND RUNWAY. CONTACT JASON KRETSCHMER (AJV-A421) 405-954-4019. <i>Digitally signed by</i> JASON KRETSCHMER Jul 22, 2021 QUALITY 10 CHECKED QUALITY 38 CHECKED					

WAAS CH 70611 W04B	APP CRS 046°	Rwy Idg 7200 TDZE 260 Apt Elev 266
--	------------------------	---

RNAV (GPS) RWY 4R
BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Rwy 4R helicopter visibility reduction below ¾ SM NA. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV Cat A and B visibility to RVR 5000.	MALSR 	MISSED APPROACH: Climb to 2900 direct RIRIW and on track 047° to BRAUM and hold.
--	--	--

D-ATIS 125.65	LITTLE ROCK APP CON 135.4 353.6	ADAMS TOWER 118.7 257.8	GND CON 121.9 339.8	CLNC DEL 118.95
-------------------------	---	-----------------------------------	-------------------------------	---------------------------

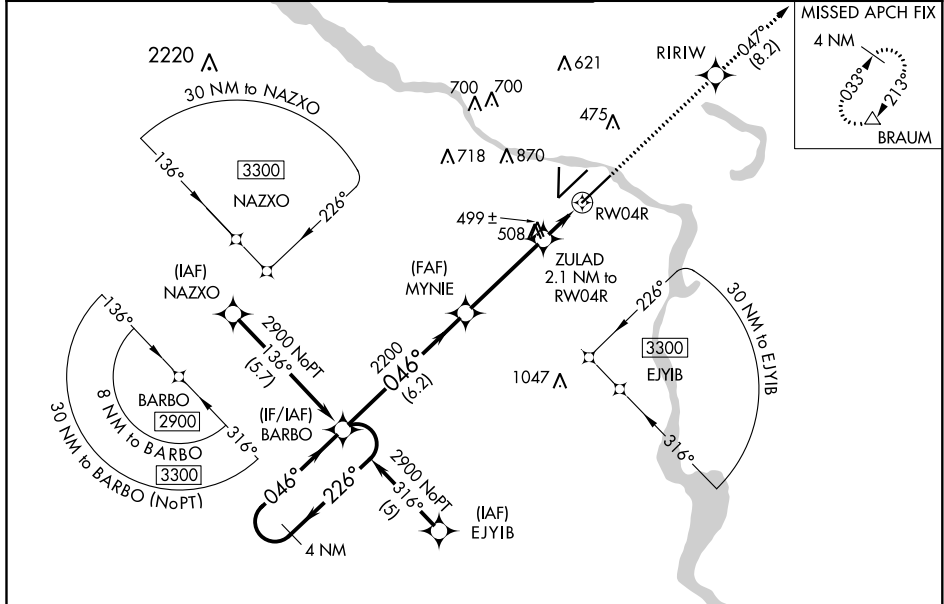

ELEV 266		D TDZE 260	
4 NM Holding Pattern		2900	RIRIW
GP 3.00° TCH 49		tr	047°
BARBO			BRAUM
2900 ← 226°		*LNAV only.	
046° →			
2200			
MYNIE			
2200			
ZULAD 2.1 NM to RW04R			
*1.4 NM to RW04R			
*960			
RW04R			
6.2 NM			
3.7 NM			
0.7 NM			
1.4 NM			
CATEGORY	A	B	C
LPV DA	574/40	314 (400-¾)	
LNAV/VNAV DA	728/60	468 (500-1¼)	
LNAV MDA	760/40	500 (500-¾)	760/50 500 (500-1)
CIRCLING	820-1 554 (600-1)	1000-1 734 (800-1)	1180-2¾ 914 (1000-2¾)
			1180-3 914 (1000-3)
		TDZ/CL Rwy 22R	
		HIRL Rwy 4R-22L, 4L-22R, and 18-36	

