

Flight Procedures Cover Page	Task Action: P-NOTAM	Task Type: IAP	Estimated Chart Date: 09/03/2026	APWS Task ID: 1BD51D83A57043B892C60AE541F97161	APWS Project ID: F34A1AB0B6094F39A684B4F3A1449F53
Procedure: RNAV (GPS) RWY 13 ORIG-D		Enroute: NO	Specialist: Johnson, Timothy		Agreement Number:
Airport ID: KICR			Airport City: WINNER		State: SD
Facility ID:	Facility Type:	Flight Inspection Remark Type:			
Procedure Comments: Visibility Initiative (Garmin) - Update IAP visibility minimums IAW Order 8260.3, Chapter 3, Section 3-3. Visibility Minimums. PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021, SUBJECT: GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/VALIDATION. CONTACT: CASEY HILL (405) 954-0624. QUALITY 6 CHECKED SN 3/23/26 QUALITY 9 CHECKED BEGUE					



WAAS CH 61212 W13A	APP CRS 129°	Rwy Ldg TDZE Apt Elev	5500 2020 2032
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13

WINNER RGNL (ICR)

⚠ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Valentine altimeter setting. When local altimeter setting not received, use Valentine, NE altimeter setting and increase all DA/MDA 240 feet; increase LPV all Cats visibility ¾ mile, LNAV/VNAV all Cats visibility 1 mile, LNAV Cat C visibility ¾ mile, Circling Cat B visibility ¾ mile and Cat C visibility 1 mile. Circling NA to Rwy's 3 and 21.	MISSED APPROACH: Climb to 4100 direct AGUFY and hold.
---	--

ASOS 126.775	MINNEAPOLIS CENTER 125.1 269.1	GCO 121.725	UNICOM 122.8 (CTAF) 0
------------------------	--	-----------------------	---------------------------------

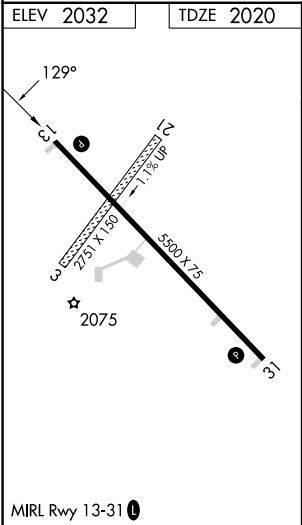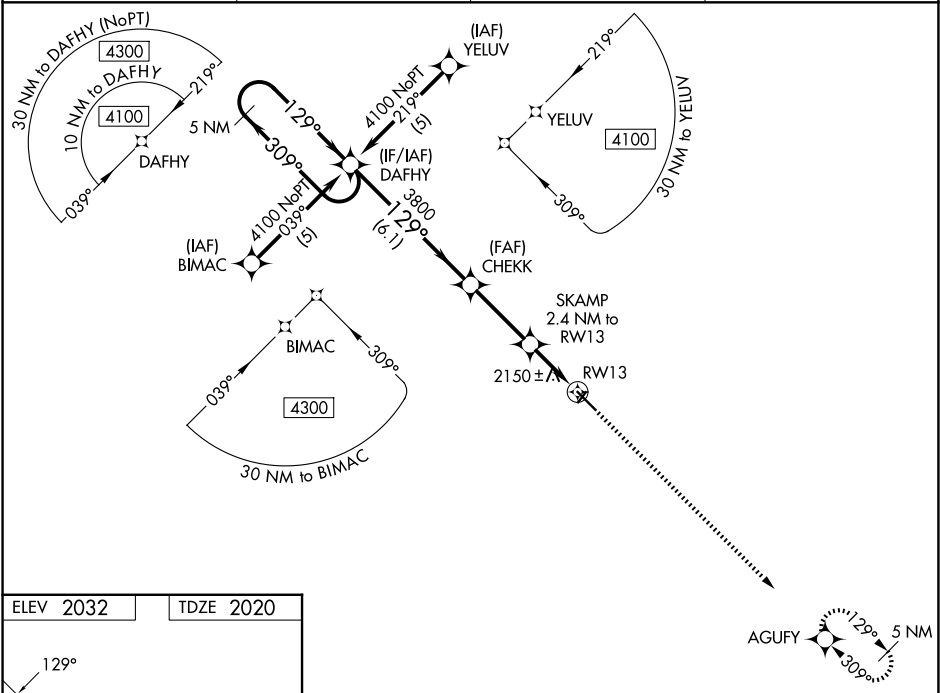

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 38).				4100	AGUFY
5 NM Holding Pattern				DAFH	CHECK
4100 ← 309° → 129° → 3800				SKAMP 2.4 NM to RW13	*LNAV only
GP 3.00° TCH 38				*2800	*1.4 NM to RW13
				6.1 NM	3 NM
CATEGORY	A	B	C	D	
LPV DA	2270-1 250 (300-1)			NA	
LNAV/VNAV DA	2456-1½ 436 (500-1½)			NA	
LNAV MDA	2480-1	460 (500-1)	2480-1¼ 460 (500-1¼)	NA	
CIRCLING	2580-1 548 (600-1)	2680-1 648 (700-1)	2680-1¾ 648 (700-1¾)	NA	

NC-1, 19 MAR 2026 to 16 APR 2026

NC-1, 19 MAR 2026 to 16 APR 2026