


(OROSZ3.ORSZ) FIG
ORSZ THREE DEPARTURE (RNAV)

AL-67 (FAA)



BOB HOPE (BUR)
BURBANK, CALIFORNIA

RNAV 1 - DME/DME/IRU or GPS.	CLNC DEL 118.0 348.6
RADAR required.	CPDLC
	SOCAL DEP CON 124.6 298.85

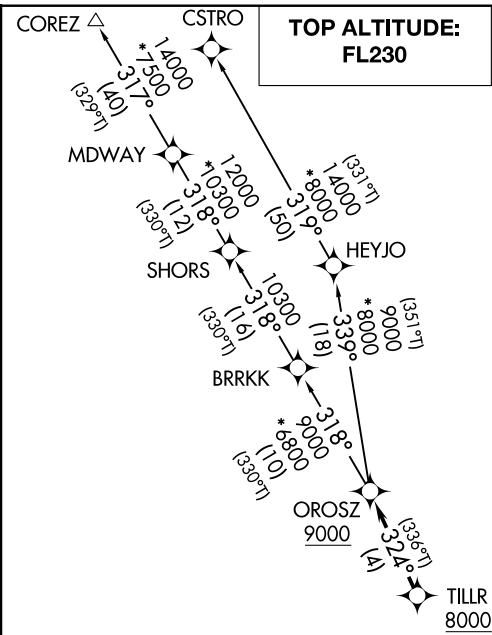

PROTOTYPE: NOT FOR NAVIGATION

NOTE: Maintain at or below 250K unless otherwise directed by ATC.



TAKEOFF MINIMUMS

- Rwy 8: Standard with minimum climb of 420'/NM to 2500.
Rwy 15: Standard with minimum climb of 340'/NM to 2100.
Rwy 26: Standard with minimum climb of 380'/NM to 4800.
Rwy 33: Standard with minimum climb of 460'/NM to 4900.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 8, 15: Climbing right turn heading 210° or as assigned for vectors to cross TILLR at or above 8000, thence...

TAKEOFF RUNWAY 26: Climbing right turn heading 290° or as assigned for vectors to cross TILLR at or above 8000, thence...

TAKEOFF RUNWAY 33: Climbing left turn heading 270° or as assigned for vectors to cross TILLR at or above 8000, thence...

...on (transition) maintain FL230. Expect filed altitude 10 minutes after departure.

COREZ TRANSITION (OROSZ3.COREZ)

CSTRO TRANSITION (OROSZ3.CSTRO)

ORSZ THREE DEPARTURE (RNAV)
(OROSZ3.ORSZ) FIG

BURBANK, CALIFORNIA
BOB HOPE (BUR)