

Flight Procedures Cover Page	Task Action: Abbreviated Amendment	Task Type: IAP	Estimated Chart Date: 02/20/2025	APWS Task ID: 228AB158D4CE46149E3B2CE7B2E27A27	APWS Project ID: 529F816CAFBC4E1194E765A95729C679
Procedure: VOR-A AMDT 5B		Enroute: NO	Specialist: Feronti, Tia		Agreement Number:
Airport ID: KCJR			Airport City: CULPEPER		State: VA
Facility ID: CSN	Facility Type: VORTAC	Flight Inspection Remark Type:			
Procedure Comments: PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021 GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/VALIDATION. DAVID DANNER, AJV-A420: 405-954-5077. 12/30/2024: THIS IS A CORRECTED COPY OF THE FORM APPROVED ON 12/06/2024. 1. PROFILE LINE 8: ADDED CSN VORTAC 060-230 2500, 230-330 5300, 330-060 3700.- INFORMATION MISSING FROM PREVIOUS FORM. QUALITY 38 CHECKED QUALITY 30 CHECKED					

CULPEPER, VIRGINIA

AL-5877 (FAA)

FIG



VORTAC CSN	APP CRS	Rwy Idg	N/A
116.3	184°	TDZE	N/A
Chan 110		Apt Elev	316

VOR-A
CULPEPER RGNL (CJR)

▼ Rwy 4, 22 helicopter visibility reduction below 1 SM NA. When Circling to Rwy 4, 22 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. When local altimeter setting not received, use IAD altimeter setting and increase all MDAs 80 feet, Circling Cats C and D visibility ¼ SM.

MISSED APPROACH: Climbing left turn to 2900 direct CSN VORTAC and hold.

AWOS-3 119.325	POTOMAC APP CON 128.525 306.925	CLNC DEL 121.6	UNICOM 123.075 (CTAF) 0
-------------------	------------------------------------	-------------------	----------------------------

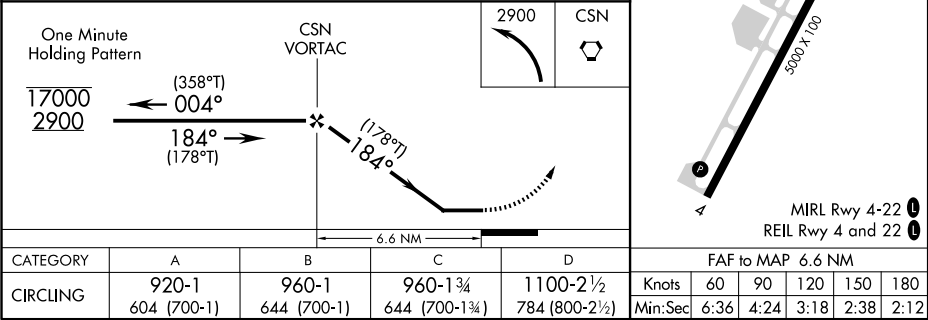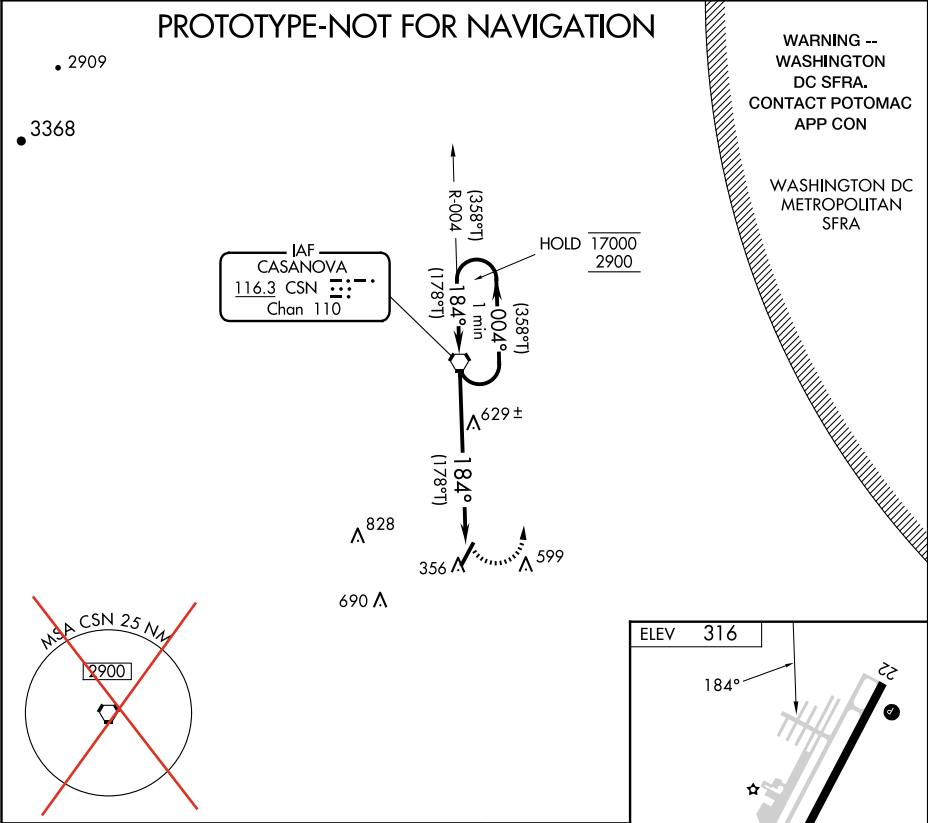

CULPEPER, VIRGINIA

Amdt 5B FIG

38°32'N-77°-52'W

CULPEPER RGNL (CJR)

VOR-A




VORTAC CSN	APP CRS	Rwy Idg	N/A
116.3	184°	TDZE	N/A
Chan 110		Apt Elev	316

VOR-A
CULPEPER RGNL (CJR)

⚠ When VGSI inoperative, procedure NA at night. Visibility reduction by Helicopters NA. When local altimeter setting not received, use Washington Dulles Intl altimeter setting and increase all DAs/MDAs 80 feet, Circling Cats C and D visibility ¼ mile.

MISSED APPROACH: Climbing left turn to 2900 direct CSN VORTAC and hold.

AWOS-3 119.325	POTOMAC APP CON 128.525 306.925	CLNC DEL 121.6	UNICOM 123.075 (CTAF) 📶
--------------------------	---	--------------------------	--

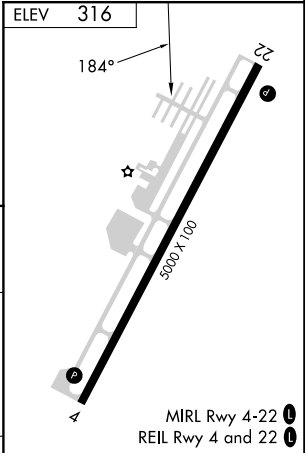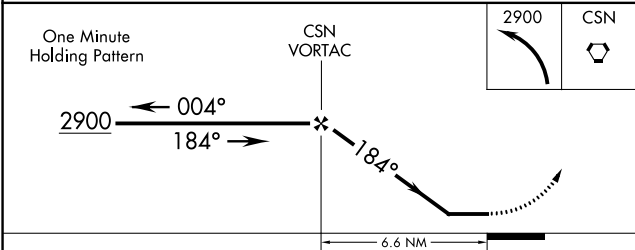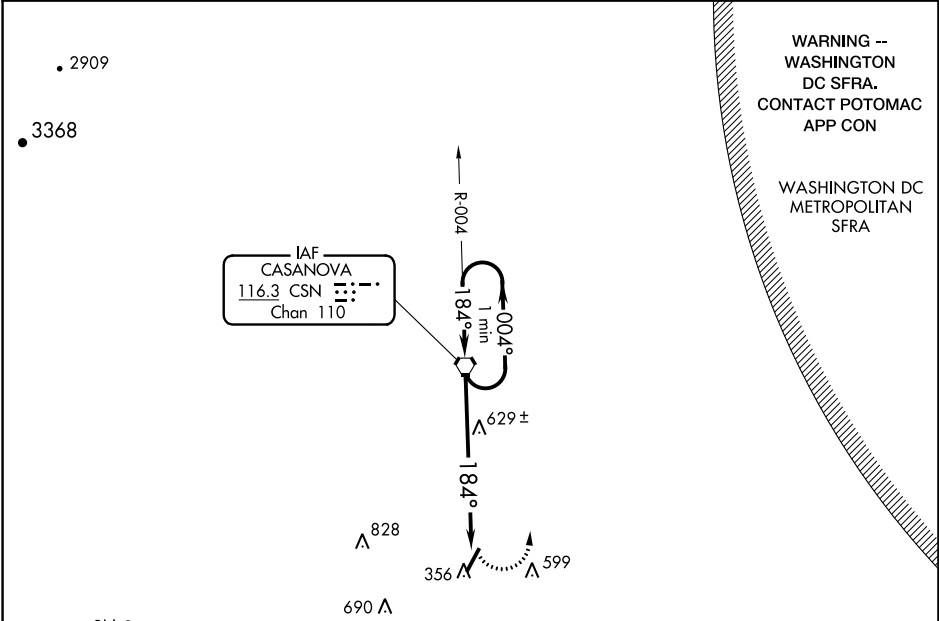

CATEGORY	A	B	C	D	FAF to MAP 6.6 NM					
CIRCLING	920-1 604 (700-1)	960-1 644 (700-1)	960-1¾ 644 (700-1¾)	1100-2½ 784 (800-2½)	Knots	60	90	120	150	180
					Min:Sec	6:36	4:24	3:18	2:38	2:12