

WAAS CH 77909 W27A	APP CRS <b>270°</b>	Rwy Idg <b>7095</b> TDZE <b>386</b> APT Elev <b>386</b>
--------------------------	------------------------	---

# RNAV (GPS) RWY 27

HENDERSON CITY-COUNTY (KEHR)



RNP APCH - GPS

FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -15°C OR ABOVE 54°C. BARO-VNAV AND VDP NA WHEN USING EVV ALTIMETER SETTING. WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE EVV ALTIMETER SETTING AND INCREASE LPV DA TO 677 FEET AND ALL VISIBILITIES 1/8 SM. INCREASE LNAV/VNAV DA TO 851 FEET AND ALL VISIBILITIES 1/8 SM. INCREASE ALL MDAS 60 FEET.

MISSED APPROACH:  
CLIMB TO 2500 DIRECT  
BIKME AND HOLD.

AWOS-3PT <b>118.85</b>	EVANSVILLE APP CON <b>124.025 257.8</b>	UNICOM <b>122.800 (CTAF)</b>
---------------------------	--	---------------------------------

## PROTOTYPE-NOT FOR NAVIGATION

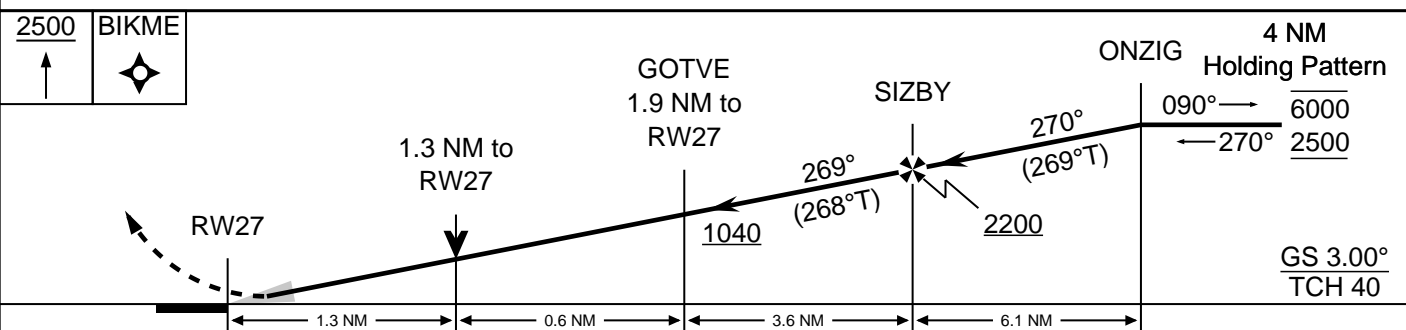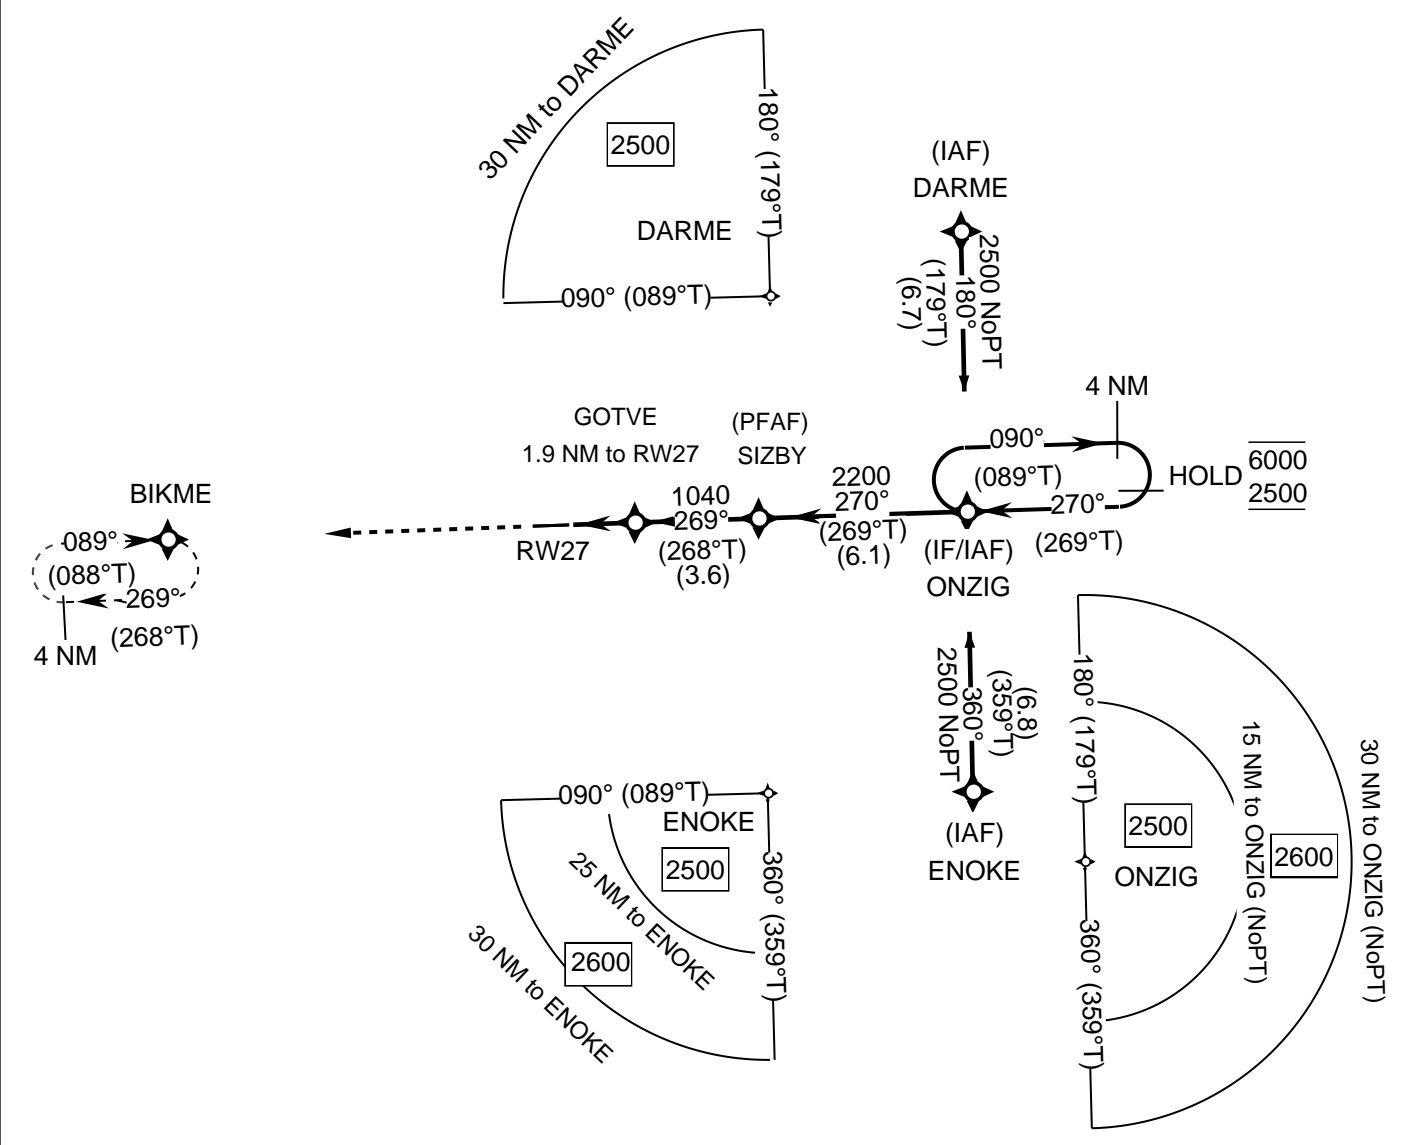

CATEGORY	A	B	C	D
LPV	636-3/4 250			
LNAV/VNAV	827-1 3/8 441			
LNAV	840-1 454		840-1 3/8 454	