

WAAS CH <b>82041</b> <b>W10A</b>	APP CRS <b>096°</b>	Rwy Ldg TDZE Apt Elev	<b>4201</b> <b>1089</b> <b>1090</b>
--	------------------------	-----------------------------	---



# RNAV (GPS) RWY 10

NEW CASTLE HENRY COUNTY MARLATT FLD (UWL)



RNP APCH - GPS.		MISSED APPROACH: Climb to 3000 direct TASUY and hold.
<p>▼ Rwy 10 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using AID altimeter setting. When local altimeter setting not received, use AID altimeter setting and increase LPV DA to 1408 feet; increase LNAV/VNAV DA to 1424 feet; increase all MDAs 80 feet and LNAV visibility Cats C and D 3/4 SM, and Circling visibility Cats C and D 1/2 SM.</p>		

AWOS-3 <b>132.375</b>	INDIANAPOLIS APP CON <b>135.45 317.8</b>	UNICOM <b>123.05 (CTAF) 0</b>
--------------------------	---	----------------------------------

## PROTOTYPE-NOT FOR NAVIGATION

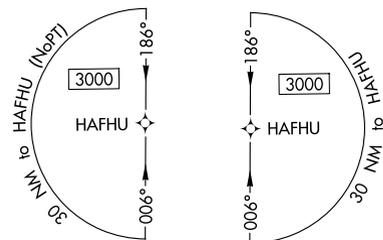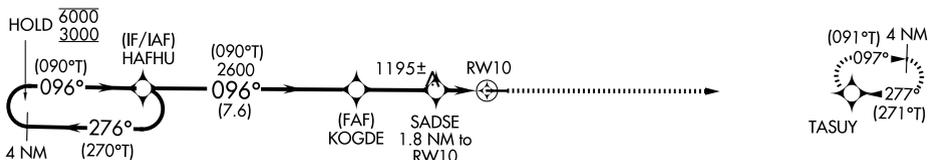

ELEV 1090	TDZE 1089
-----------	-----------

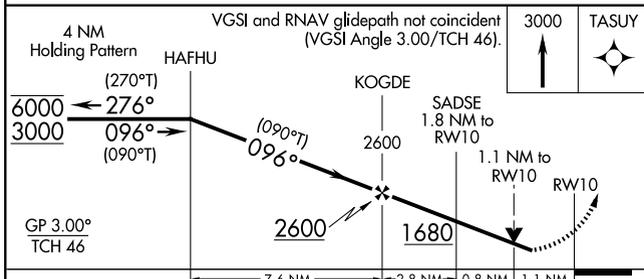

CATEGORY	A	B	C	D
LPV DA		1339-1	250 (300-1)	
LNAV/VNAV DA		1355-1	266 (300-1)	
LNAV MDA		1460-1	371 (400-1)	
CIRCLING	1520-1 430 (500-1)	1540-1 450 (500-1)	1760-1 3/4 670 (700-1 3/4)	1760-2 670 (700-2)

