


WAAS CH XXXX XXX	APP CRS 195°	Rwy Idg 5900 TDZE 984 APT Elev 984
------------------------	------------------------	---

RNAV (GPS) RWY 20

FAYETTEVILLE MUNI (KFYM)

RNP APCH - GPS.	MISSED APPROACH: CLIMB TO 3000 DIRECT EZBUV AND HOLD.
BARO-VNAV AND VDP NA WHEN USING MDQ ALTIMETER SETTING. RWY 20 HELICOPTER VISIBILITY REDUCTION BELOW 3/4 SM NOT AUTHORIZED. FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -16°C OR ABOVE 54°C. WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE MDQ ALTIMETER SETTING AND INCREASE LPV DA TO 1319 FEET AND ALL VISIBILITIES 1/8 SM; INCREASE LNAV/VNAV DA TO 1439 FEET AND ALL VISIBILITIES 1/8 SM; INCREASE ALL MDAS 60 FEET AND LNAV VISIBILITY CATS C AND D 1/8 SM, AND CIRCLING VISIBILITY CAT C 1/4 SM.	

AWOS-3 135.275	HUNTSVILLE APP CON ★ 125.6 354.1	CLNC DEL (GCO) 121.725	UNICOM 122.8 (CTAF) 0
--------------------------	--	----------------------------------	---------------------------------

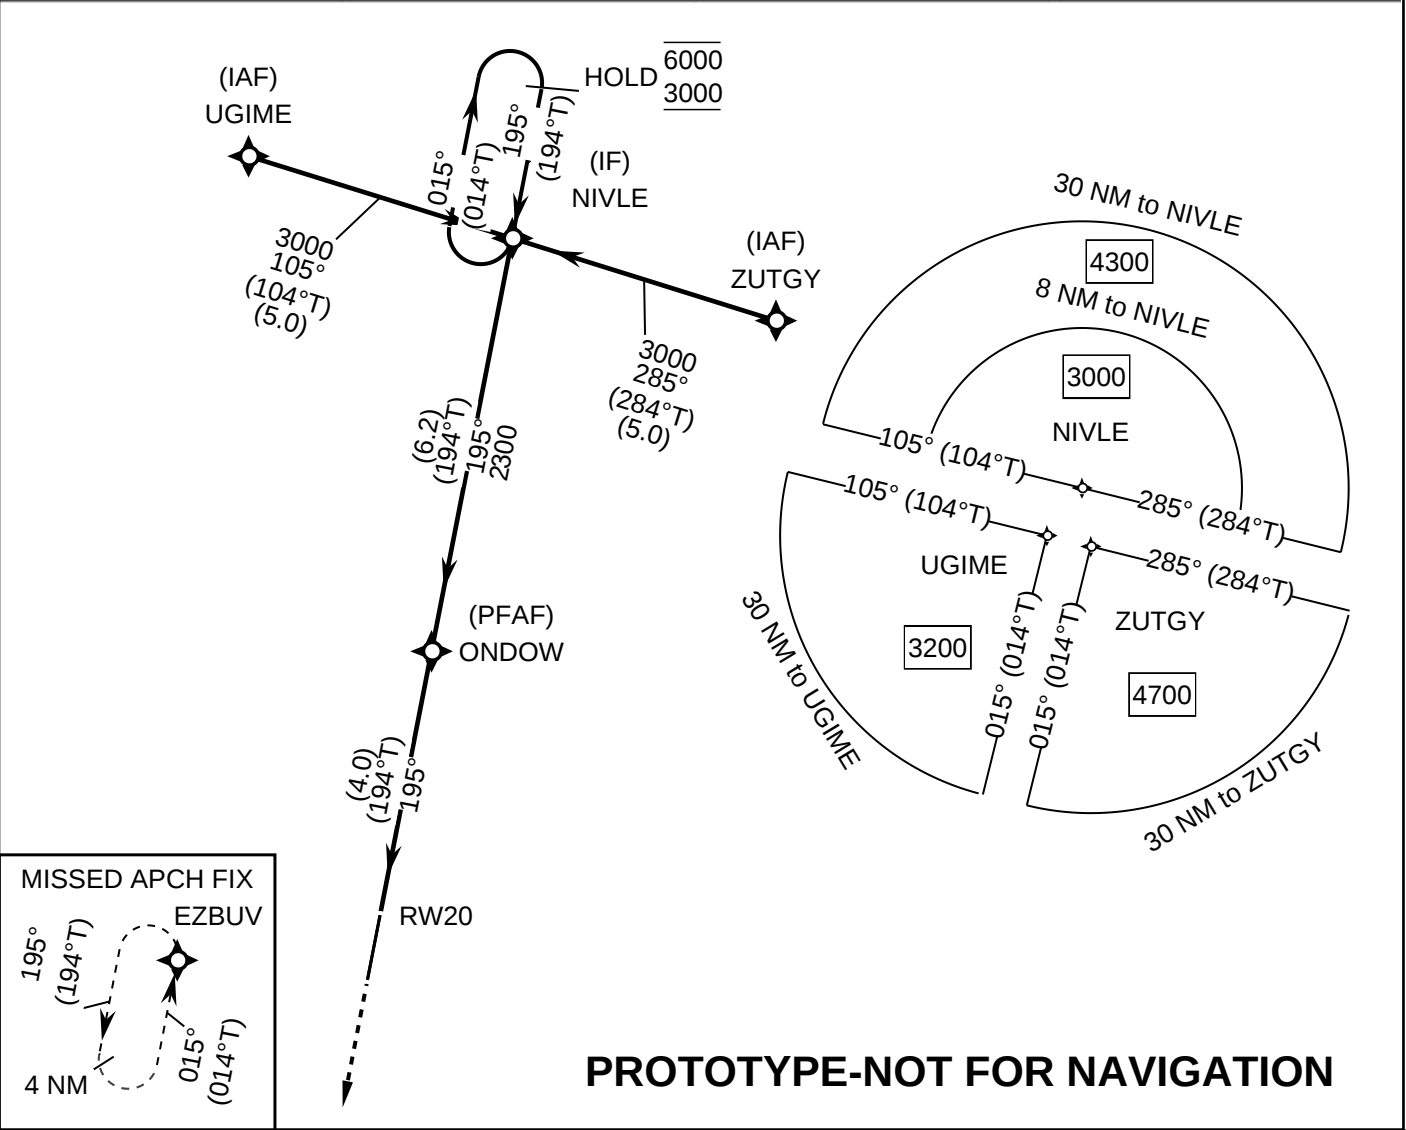

3000 ↑	EZBUV ✦	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 20).	
		RWY20 1.2 NM to RWY20 ONDOW 2300 NIVLE 015° → 6000 ← 195° 3000 GS 3.00° TCH 40	
		1.2 NM 2.8 NM 6.2 NM	
CATEGORY	A	B	D
LPV	1260-3/4 276		
LNAV/VNAV	1380-1 396		
LNAV	1380-3/4 396		1380-1 396
CIRCLING	1420-1 436	1560-1 576	1580-1 1/2 596