


WAAS CH 48912 W32A	APP CRS 319°	Rwy Ldg TDZE Apt Elev	6400 53 53
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 32


SALISBURY-OCEAN CITY WICOMICO RGNL (SBY)

RNP APCH - GPS.				MALSR	MISSED APPROACH: Climb to 2100 direct HYDRS and hold.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C. ▲ For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cat C and D visibility to 1 SM.						

ASOS 118.325	PATUXENT APP CON ★ 127.95 314.0	SALISBURY TOWER ★ 119.425 (CTAF) 0	GND CON 123.775	CLNC DEL 123.775	CLNC DEL 132.45 (when twr closed)	UNICOM 122.95
------------------------	---	---	---------------------------	----------------------------	--	-------------------------

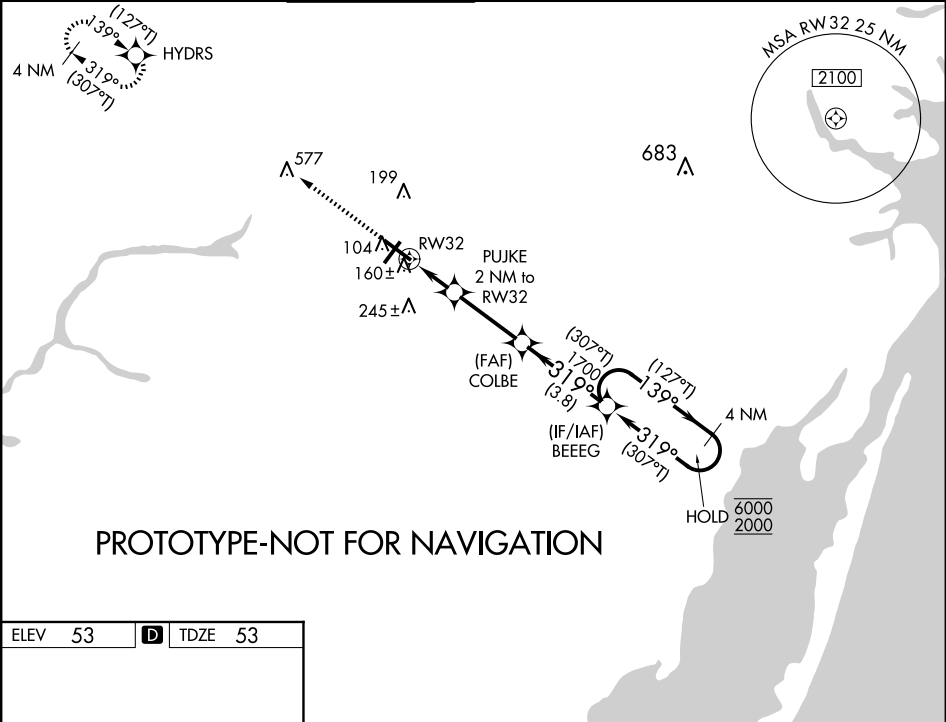

PROTOTYPE-NOT FOR NAVIGATION

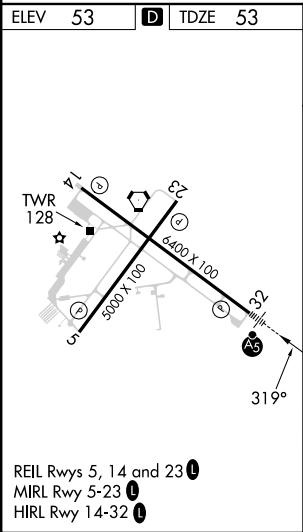

2100		HYDRS							
CATEGORY		A		B		C		D	
LPV DA				253-½		200 (200-½)			
LNAV/VNAV DA				458-¾		405 (500-¾)			
LNAV MDA		420-½ 367 (400-½)				420-⅝ 367 (400-⅝)			
CIRCLING		480-1 427 (500-1)		520-1 467 (500-1)		560-1½ 507 (600-1½)		700-2 647 (700-2)	