




WAAS CH 42610 W10A	APP CRS 099°	Rwy Ldg 7016 TDZE 624 Apt Elev 624
--	------------------------	---

RNAV (GPS) RWY 10


CHERRY CAPITAL (TVC)

RNP APCH - GPS.		MALS R	MISSED APPROACH:
<p>▼ Rwy 10 helicopter visibility reduction below 3/4 SM NA. For uncompenstated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.</p> <p>▲ For inop ALS, increase LPV visibility all Cats to 7/8 SM. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cats C and D.</p> <p>☁ -21°C</p>			<p>Climb to 4000 direct ROPTe and on track 157° to LADIN and hold.</p>

ATIS 119.175	MINNEAPOLIS CENTER 132.9 338.3	TRAVERSE CITY TOWER* 124.2 (CTAF) 0 348.6	GND CON 121.8 348.6	UNICOM 122.95
------------------------	--	---	-------------------------------	-------------------------

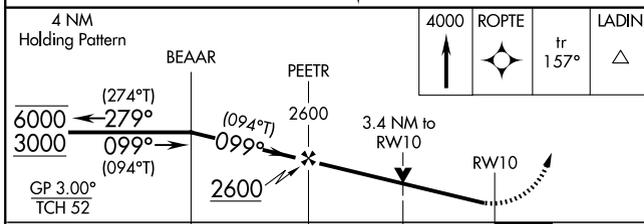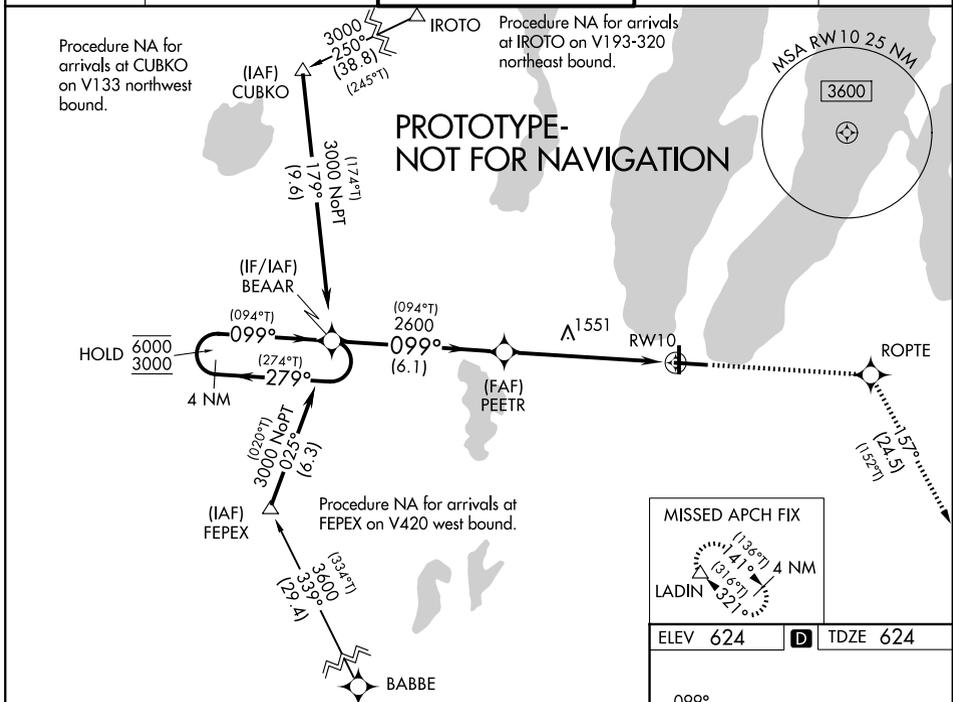

ELEV 624	D	TDZE 624
----------	----------	----------



CATEGORY	A	B	C	D
LPV DA		909-3/4	285 (300-3/4)	
LNAV/VNAV DA		1780-4	1156 (1200-4)	
LNAV MDA	1780-3/4 1156 (1200-3/4)	1780-1 1156 (1200-1)	1780-3	1156 (1200-3)
CIRCLING	1780-1/4 1156 (1200-1/4)	1780-1/2 1156 (1200-1/2)	1780-3	1156 (1200-3)

