

WAAS CH 99605 W07A APP CRS 071° Rwy Idg 5008 TDZE 6 APT Elev 7

RNAV (GPS) RWY 7



THE FLORIDA KEYS MARATHON INTL (KMTH)

RNP APCH - GPS

MISSED APPROACH: CLIMB TO 2000 DIRECT LOGEY AND HOLD.

RWY 7 HELICOPTER VISIBILITY REDUCTION BELOW 1 SM NOT AUTHORIZED. WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE EYW ALTIMETER SETTING: INCREASE LPV DA TO 482 FEET AND ALL VISIBILITIES 1/4 SM, LNAV/VNAV DA TO 474 FEET AND ALL VISIBILITIES 3/8 SM, INCREASE ALL MDAS 100 FEET AND LNAV CAT C/D VISIBILITY 1/4 SM AND CIRCLING CAT C/D VISIBILITY 1/2 SM. FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW 12°C OR ABOVE 54°C. BARO-VNAV NA WHEN USING EYW ALTIMETER SETTING. PROCEDURE NA AT NIGHT.

AWOS 135.525 MIAMI CENTER 133.5 306.9 UNICOM 122.975 (CTAF)

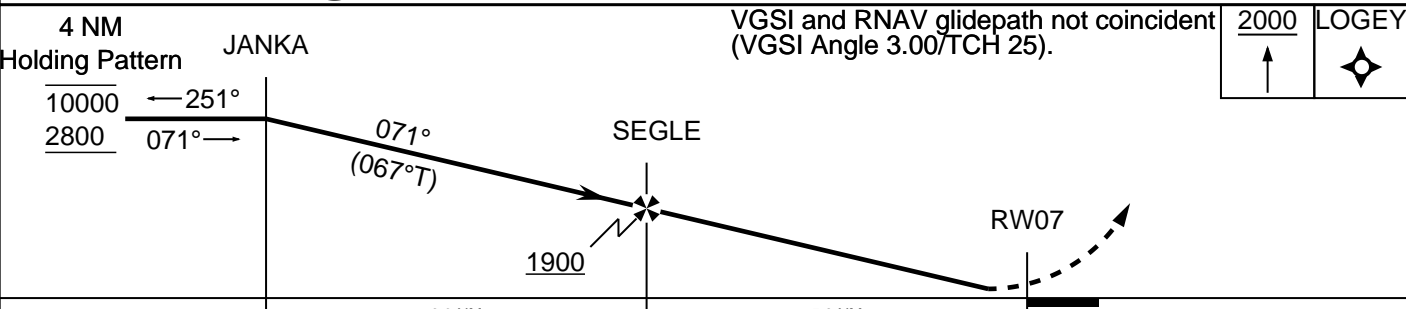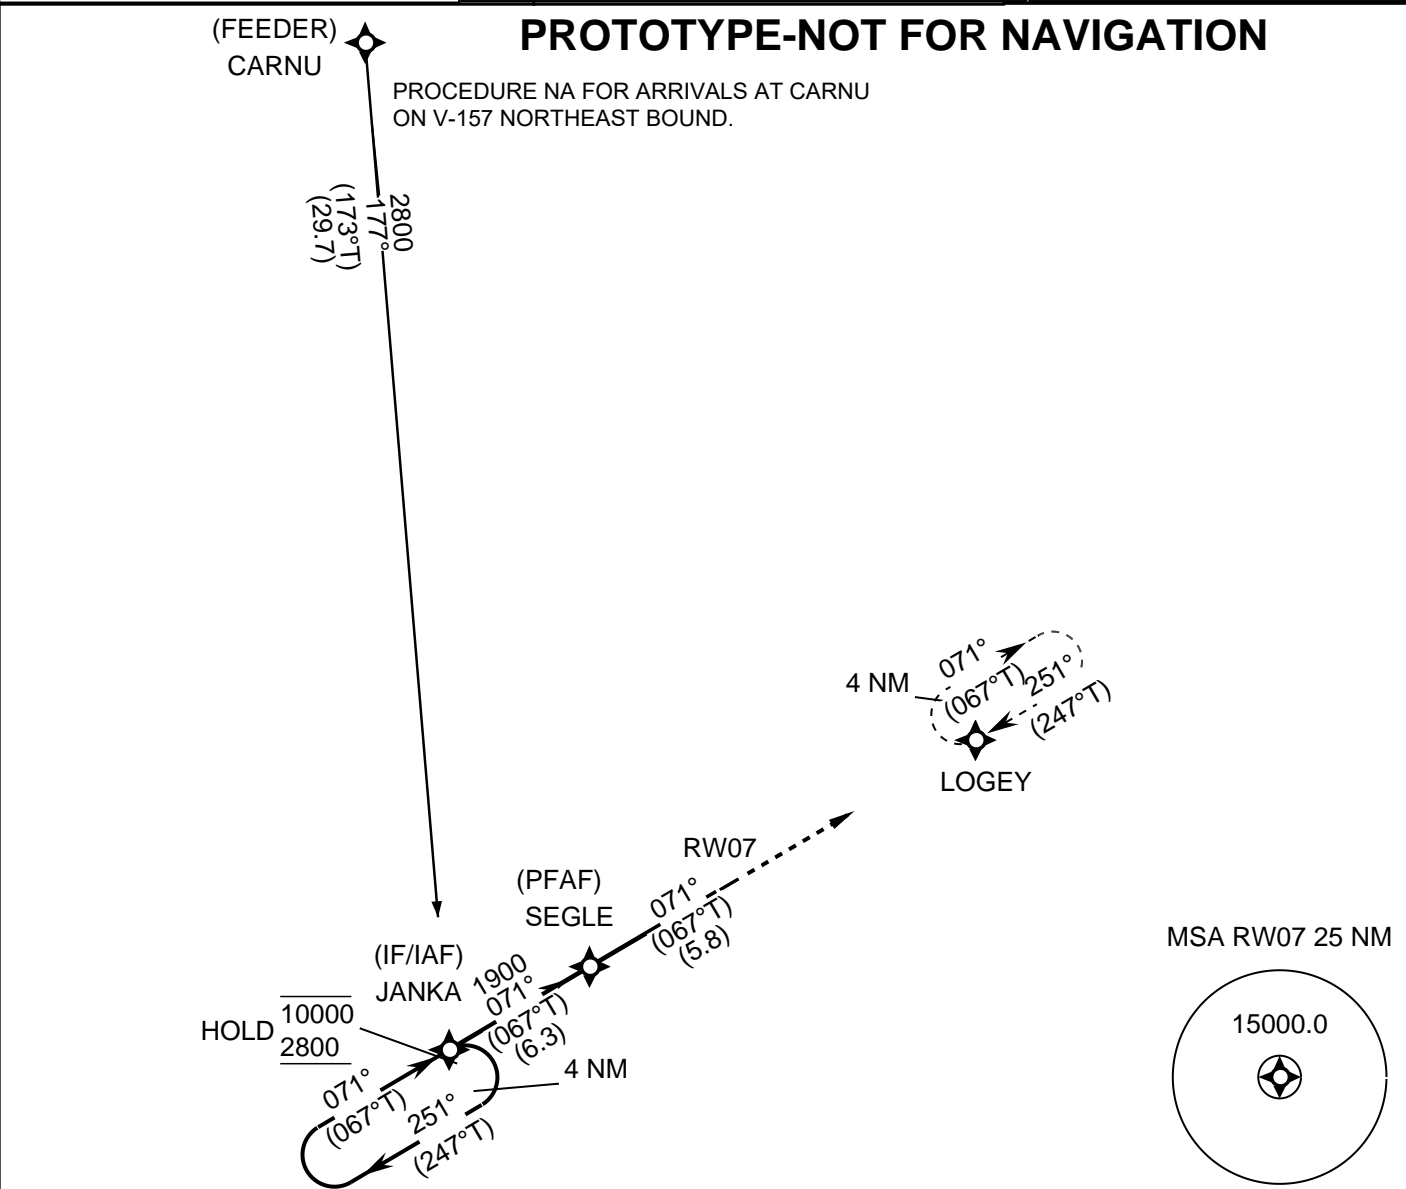

CATEGORY	A	B	C	D
LPV	389-1 1/8 383			
LNAV/VNAV	381-1 375			
LNAV	600-1 594		600-1 3/4 594	
CIRCLING	600-1 593		620-1 3/4 613	660-2 653