

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: Textual DP	Estimated Chart Date: 02/20/2025	APWS Task ID: 38D14BBD43E3490FB603DC411FF35293	APWS Project ID: 54814F8B06FD4634878512AE9129BA53
Procedure: TAKEOFF MINIMUMS AND OBSTACLE DP AMDT 1A		Enroute: NO	Specialist: Krueger, Zachary		Agreement Number:
Airport ID: KHWD			Airport City: HAYWARD		State: CA
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			

Procedure Comments:

ABBREVIATED AMENDMENT COMPLETED USING ACTIVE DATA.

CLEAR NOTAM FDC 3/0498

RWY 10L REQUIRES 300-1 1/4 OR STANDARD WITH MINIMUM CLIMB OF 211 FT/NM TO 300.

CONTACT ERIC SUSKI:405-650-4749.

Digitally signed by

ERIC N SUSKI

Nov 13, 2024



FIPC BASIC FORM

PROCEDURE: TAKEOFF MINIMUMS AND OBSTACLE DP AMDT 1A		AIRPORT NAME: HAYWARD EXEC		AIRPORT ID: KHWD	SPECIAL CONTROL NO: SP-11-190-24
FAC ID: KHWD		CITY: HAYWARD		ST: CA	ORIG CHART DATE: 02/20/2025
DFL TYPE: PROC/T	THIRD PARTY: <input type="checkbox"/> YES	EST. TIME ON SITE: 0.4	REIMB. NUMBER:	PTS TASK ID: 38D14BBD43E3490FB603DC411FF35293	

PREFLIGHT NOTES

REVIEWER:	DATE:
COMMENTS:	CHECK ONE: <input type="checkbox"/> FLT CK REQ <input type="checkbox"/> NFCR <input type="checkbox"/> REJECT
	YES NO
	CPV COMPLETE? <input checked="" type="checkbox"/> X <input type="checkbox"/>

PROCEDURE RESULTS

INSPECTION DATE: 12/10/2024	CREW #: VN570	N #: N71	INSTRUMENT PROCEDURE STATUS: <input checked="" type="checkbox"/> SAT <input type="checkbox"/> SAT W/CHANGES <input type="checkbox"/> UNSAT	ARINC CODING: <input checked="" type="checkbox"/> SAT <input type="checkbox"/> SAT/GOLD <input type="checkbox"/> UNSAT
FLIGHT INSPECTOR SIGNATURE: kevin y cheng @ 12/10/2024 22:22		PRINTED NAME: CHENG, KEVIN YI		NOTAM INITIATED? <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

FLIGHT INSPECTOR REMARKS:
 SP-11-190-24 Reconfiguration of existing procedure: Hayward Executive, Hayward, CA, Obstacle Departure Procedure flown SAT for RWY 10L/10R/28L/28R. RWY 10L obstacle verified with 211 FT/NM minimum climb.

IN-FLIGHT OBSTACLE REPORT

OBSTRUCTION ID #:	COORDINATES OR LOCATION:	GNSS ALTITUDE (MSL):	BAROMETRIC ALTITUDE (MSL):	HEIGHT ABOVE GROUND LEVEL:
--------------------------	---------------------------------	-----------------------------	-----------------------------------	-----------------------------------



TAKEOFF MINIMUMS, (OBSTACLE) DEPARTURE PROCEDURES, AND DIVERSE VECTOR AREA (RADAR VECTORS)



24249

HANFORD, CA

HANFORD MUNI (HJO)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1A 15SEP16 (16259) (FAA)

DEPARTURE PROCEDURE:

Rwy 14, climbing left turn heading 050° to intercept V-23.

Rwy 32, climbing right turn heading 050° to intercept V-23.

TAKEOFF OBSTACLE NOTES:

Rwy 14: fence 9' from DER, 298' left of centerline, 244' MSL.

Catenary 1293' from DER, 1293' left of centerline, 39' AGL/287' MSL.

Poles beginning 1679' from DER, crossing centerline, up to 52' AGL/296' MSL.

Trees beginning 2224' from DER, 391' left of centerline up to 313' MSL.

Rwy 32: fence 168' from DER, 9' left of centerline, 245' MSL.

Pole 588' from DER, 588' left of centerline, 25' AGL/278' MSL.

Sign 614' from DER, 151' right of centerline, 9' AGL/261' MSL.

Trees and poles beginning 592' from DER, 3' left of centerline, up to 300' MSL.

Poles beginning 1127' from DER, 222' right of centerline, up to 40' AGL/293' MSL.

Tree 2159' from DER, 434' right of centerline, 299' MSL.



HAYWARD, CA

HAYWARD EXEC (HWD)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 13JAN11 (21140) (FAA)

DEPARTURE PROCEDURE:

Rwys 10L, 10R, climbing right turn direct OSI VORTAC.

Rwys 28L, 28R, climbing left turn direct OSI VORTAC.

TAKEOFF OBSTACLE NOTES:

Rwy 10L, hangars, trees and buildings beginning 625' from DER, 67' left of centerline, up to 100' AGL/155' MSL.

Trees beginning 2050' from DER, 1' right of centerline, up to 60' AGL/107' MSL.

Rwy 10R, trees, poles, and buildings beginning 21' from DER, 61' left of centerline, up to 100' AGL/155' MSL.

Windsock, blast fence, trees, buildings and pole beginning 23' from DER, 38' right of centerline, up to 74' AGL/119' MSL.

Rwy 28L, trees beginning 899' from DER, 141' left of centerline, up to 93' AGL/108' MSL.

Antennas, road, and trees beginning 108' from DER, 68' right of centerline, up to 87' AGL/102' MSL.

Rwy 28R, antenna and trees beginning 728' from DER, 28' left of centerline, up to 87' AGL/102' MSL.

Trees beginning 391' from DER, 4' right of centerline, up to 95' AGL/125' MSL.

HAYWARD EXECUTIVE (HWD)

DIVERSE VECTOR AREA (RADAR VECTORS)

AMDT 1 07JAN16 (16007) (FAA)

Rwys 10L/R, heading as assigned by ATC.

Rwys 28L/R, heading as assigned by ATC; requires min. climb of 310' per NM to 4600.

HOLLISTER, CA

HOLLISTER MUNI (CVH)

TAKEOFF MINIMUMS AND (OBSTACLE) DEPARTURE PROCEDURES

AMDT 1 05JUN08 (08157) (FAA)

TAKEOFF MINIMUMS:

Rwy 6, NA-obstacles.

Rwy 24, NA-ATC.

Rwy 13, std. w/ min. climb of 391' per NM to 3500, or 3100-3 for climb in visual conditions.

Rwy 31, std. w/ min climb of 209' per NM to 2300, or 3100-3 for climb in visual conditions.

DEPARTURE PROCEDURE:

Rwy 13, climbing right turn to heading 332° and via SJC R-121 direct SJC VOR/DME to 6000 before proceeding on course or for climb in visual conditions: cross Hollister Muni Airport at or above 3100 MSL before proceeding on course.

Rwy 31, climb heading 307° and via SJC R-121 direct SJC VOR/DME to 6000 before proceeding on course or for climb in visual conditions: cross Hollister Muni Airport at or above 3100 MSL before proceeding on course.

TAKEOFF OBSTACLE NOTES:

Rwy 13, terrain beginning 992' from DER, 348' left of centerline, up to 289' MSL.

Terrain beginning 2467' from DER, 154' right of centerline, up to 309' MSL.

Trees beginning 1277' from departure end of runway, 348' left of centerline, up to 309' MSL.

Trees beginning 2467' from DER, 153' right of centerline, up to 270' MSL.

Rwy 31, terrain beginning 76' from DER, 392' left of centerline, up to 247' MSL.

Terrain beginning 14' from DER, 179' right of centerline, up to 231' MSL.

03 OCT 2024 to 31 OCT 2024

03 OCT 2024 to 31 OCT 2024



TAKEOFF MINIMUMS, (OBSTACLE) DEPARTURE PROCEDURES, AND DIVERSE VECTOR AREA (RADAR VECTORS)




24249

SW-2


KHWD
HAYWARD EXECUTIVE
HAYWARD, CA
ODP
RWY 10L
1:100K

KHWD:RW10L CG/CGTA TREE (192)
06-305847


KHWD

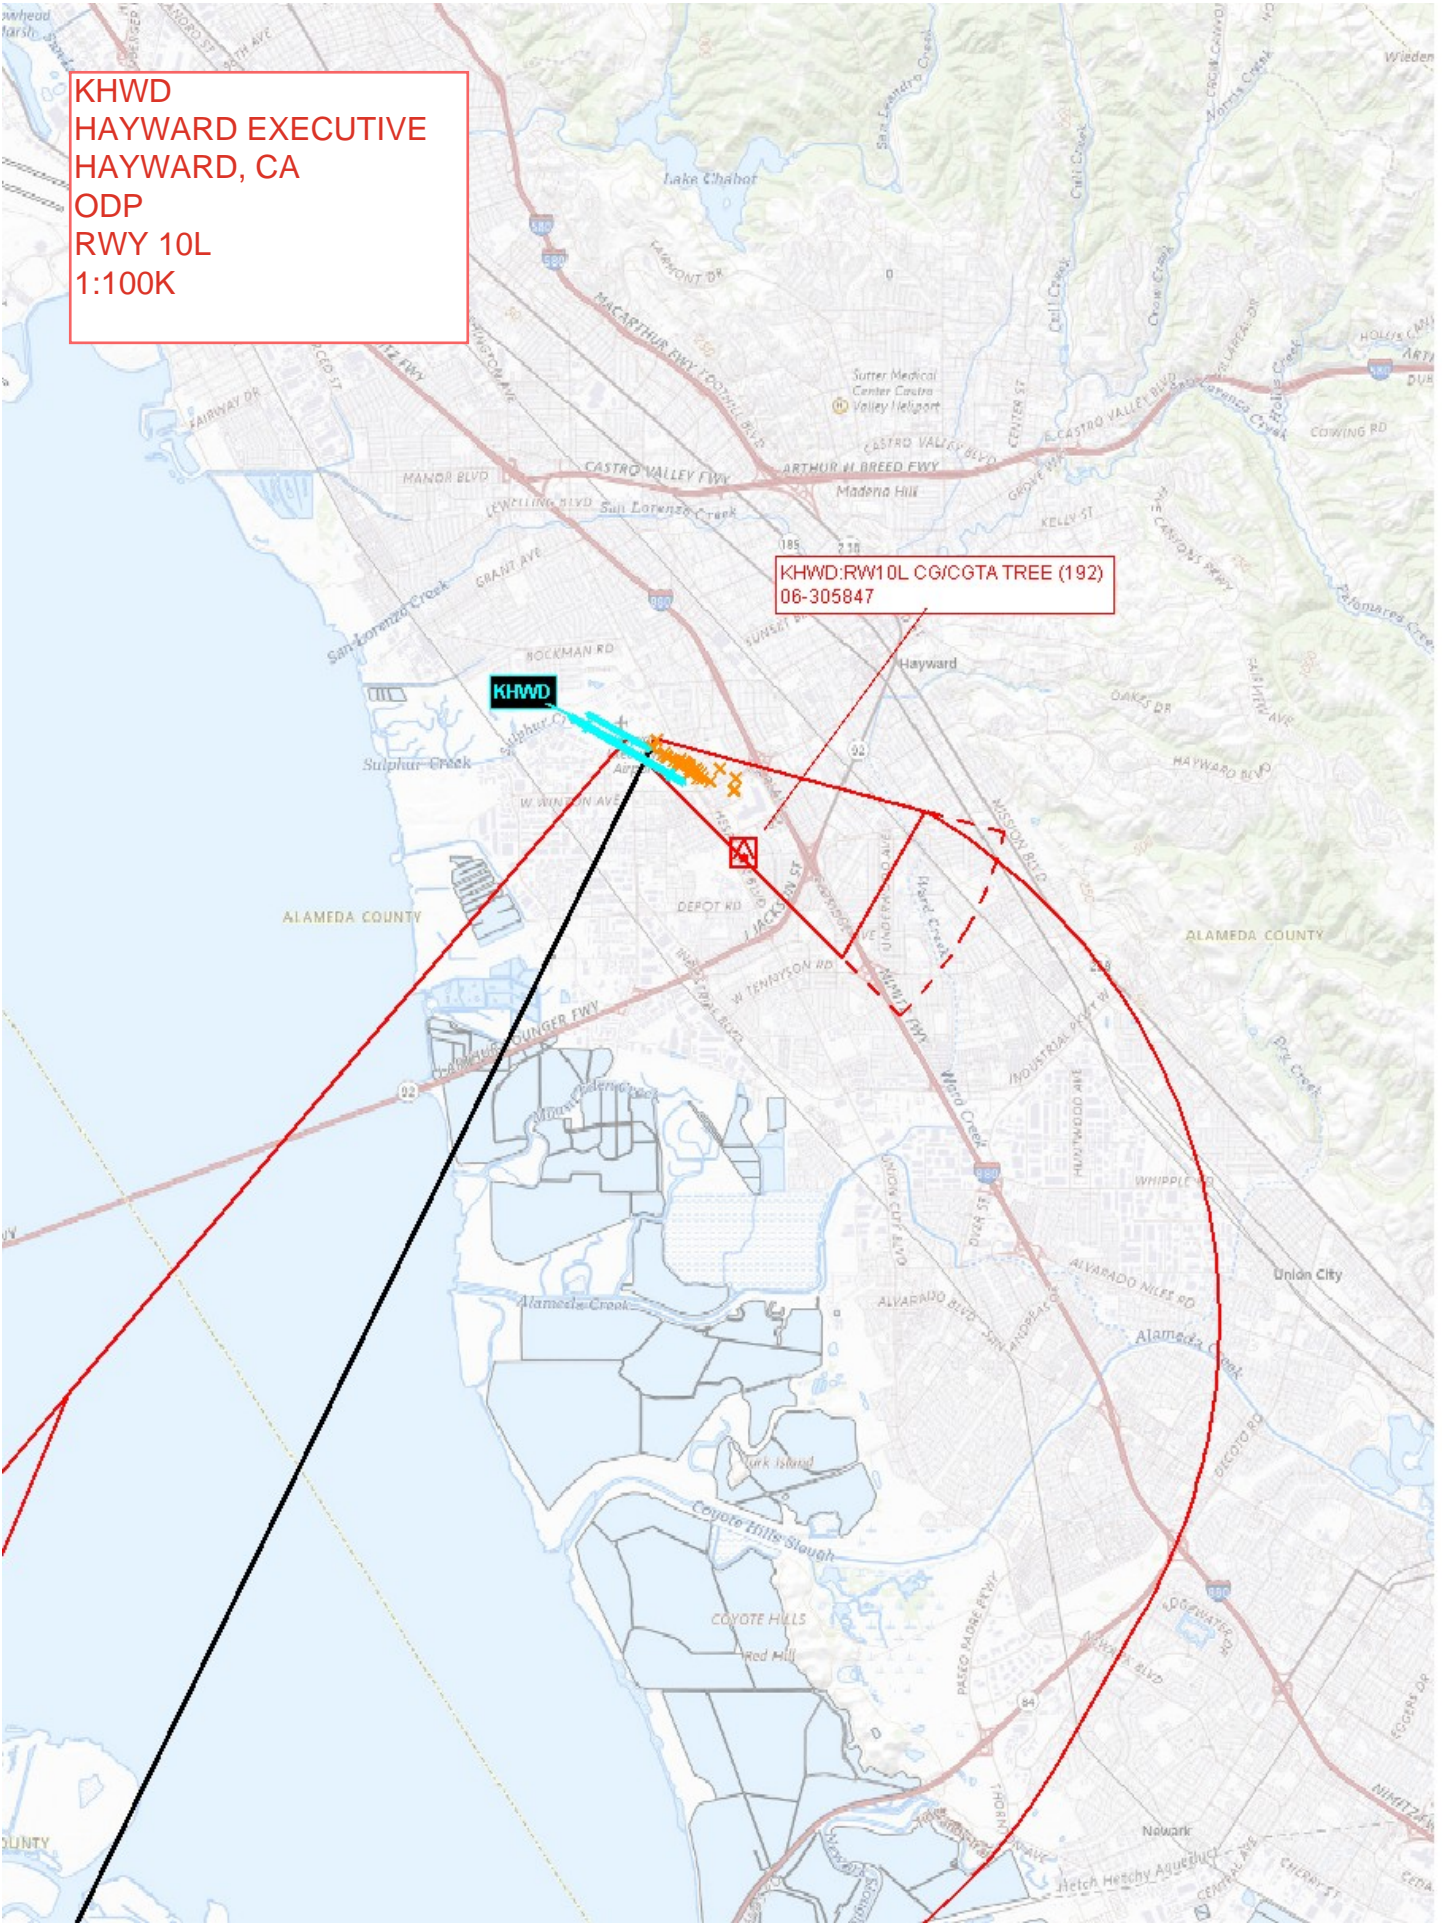


KHWD
HAYWARD EXECUTIVE
HAYWARD, CA
ODP
RWY 10R
1:100K

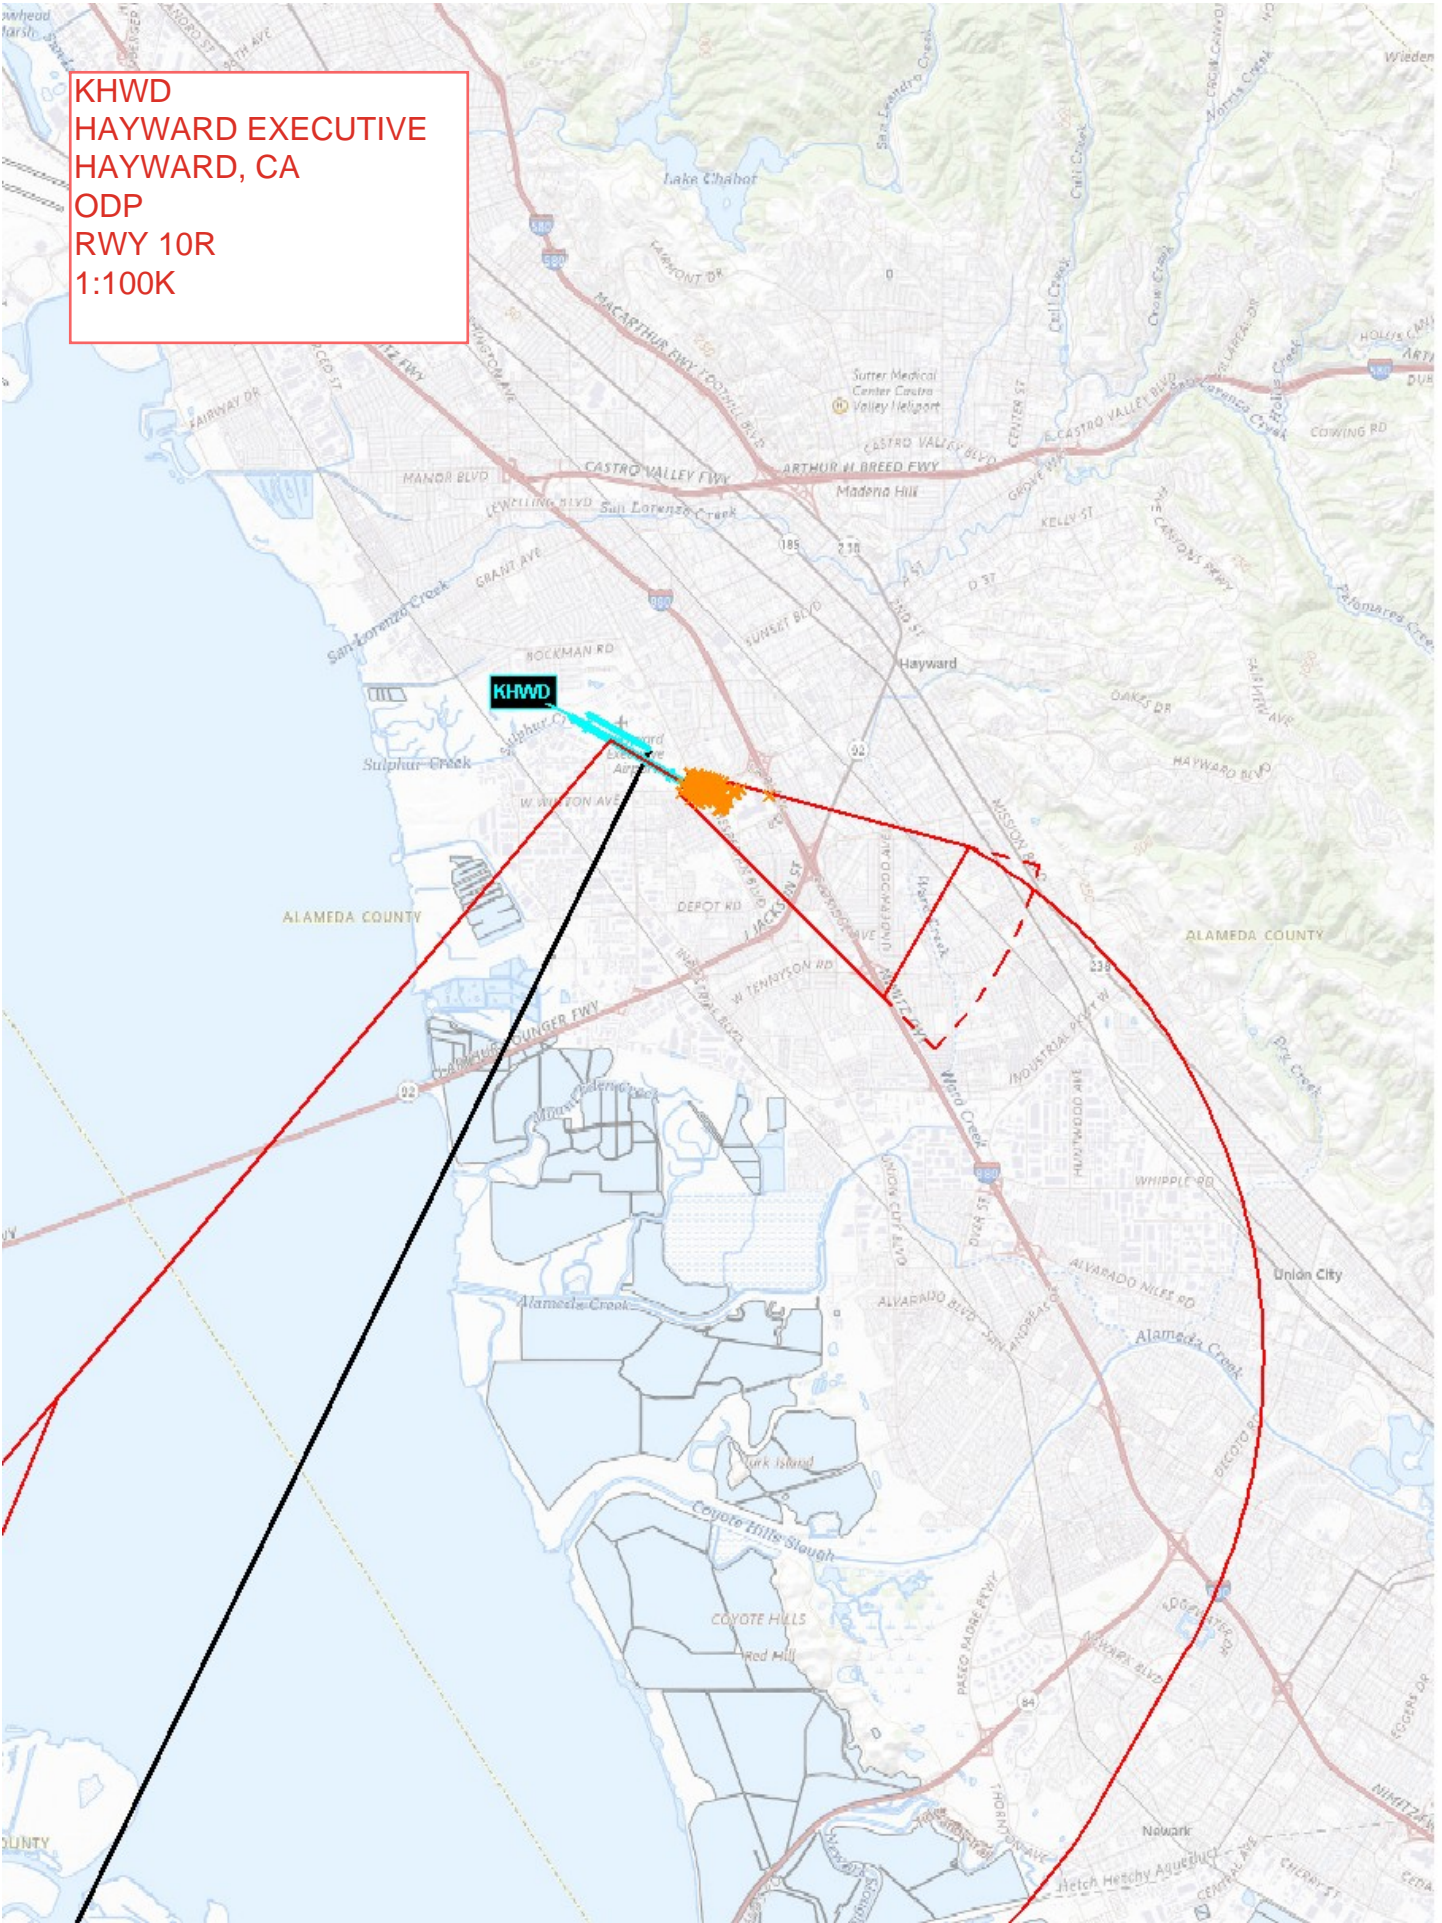

KHWD
HAYWARD EXECUTIVE
HAYWARD, CA
ODP
RWY 28L
1:100K

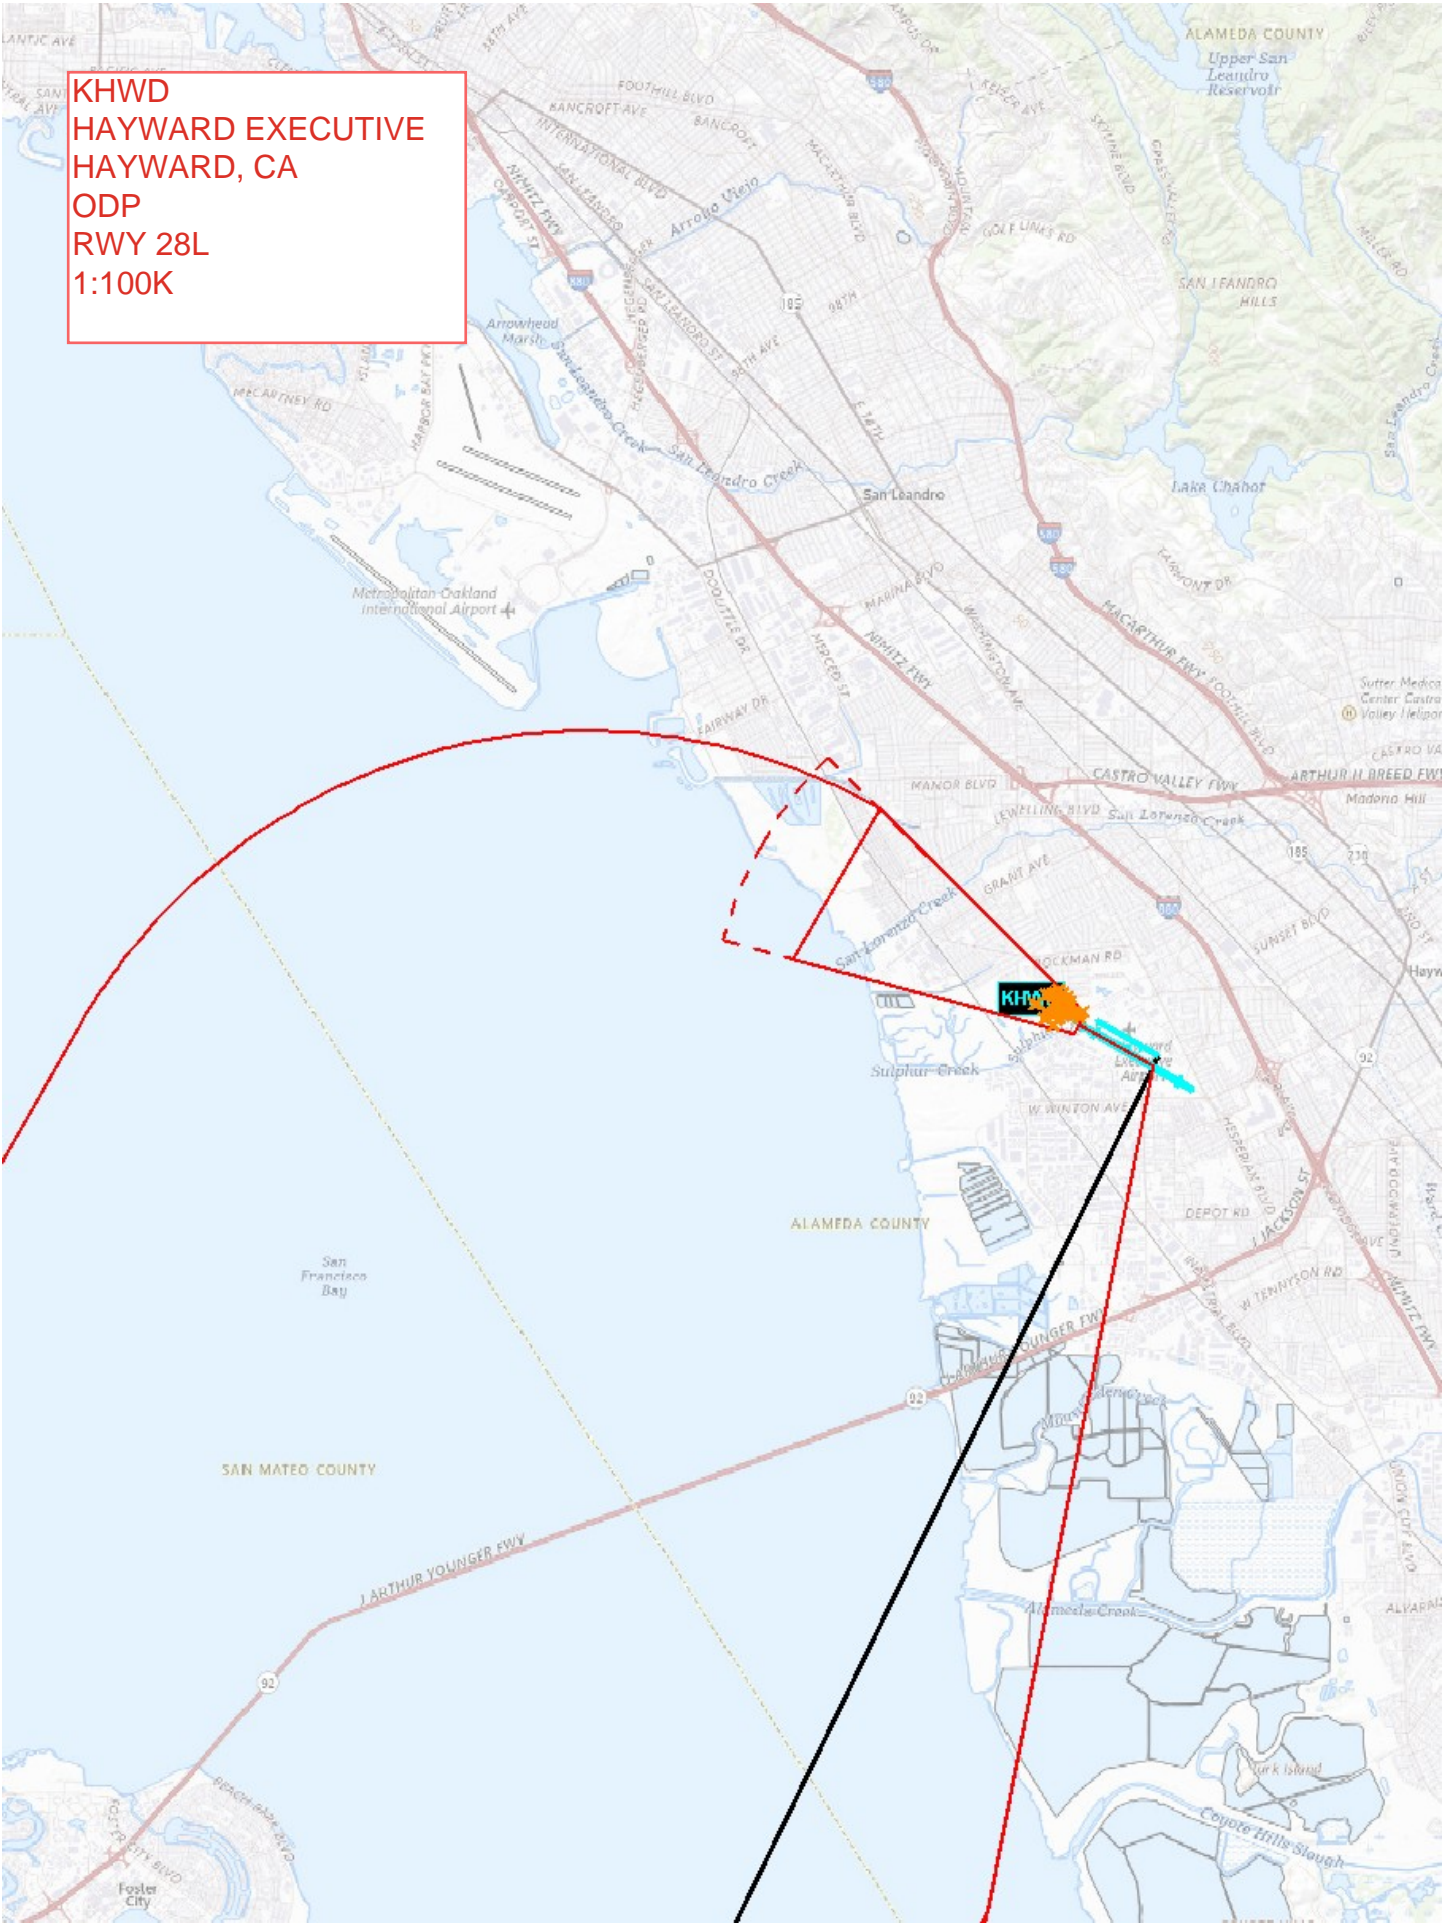

KHWD
HAYWARD EXECUTIVE
HAYWARD, CA
ODP
RWY 28R
1:100K

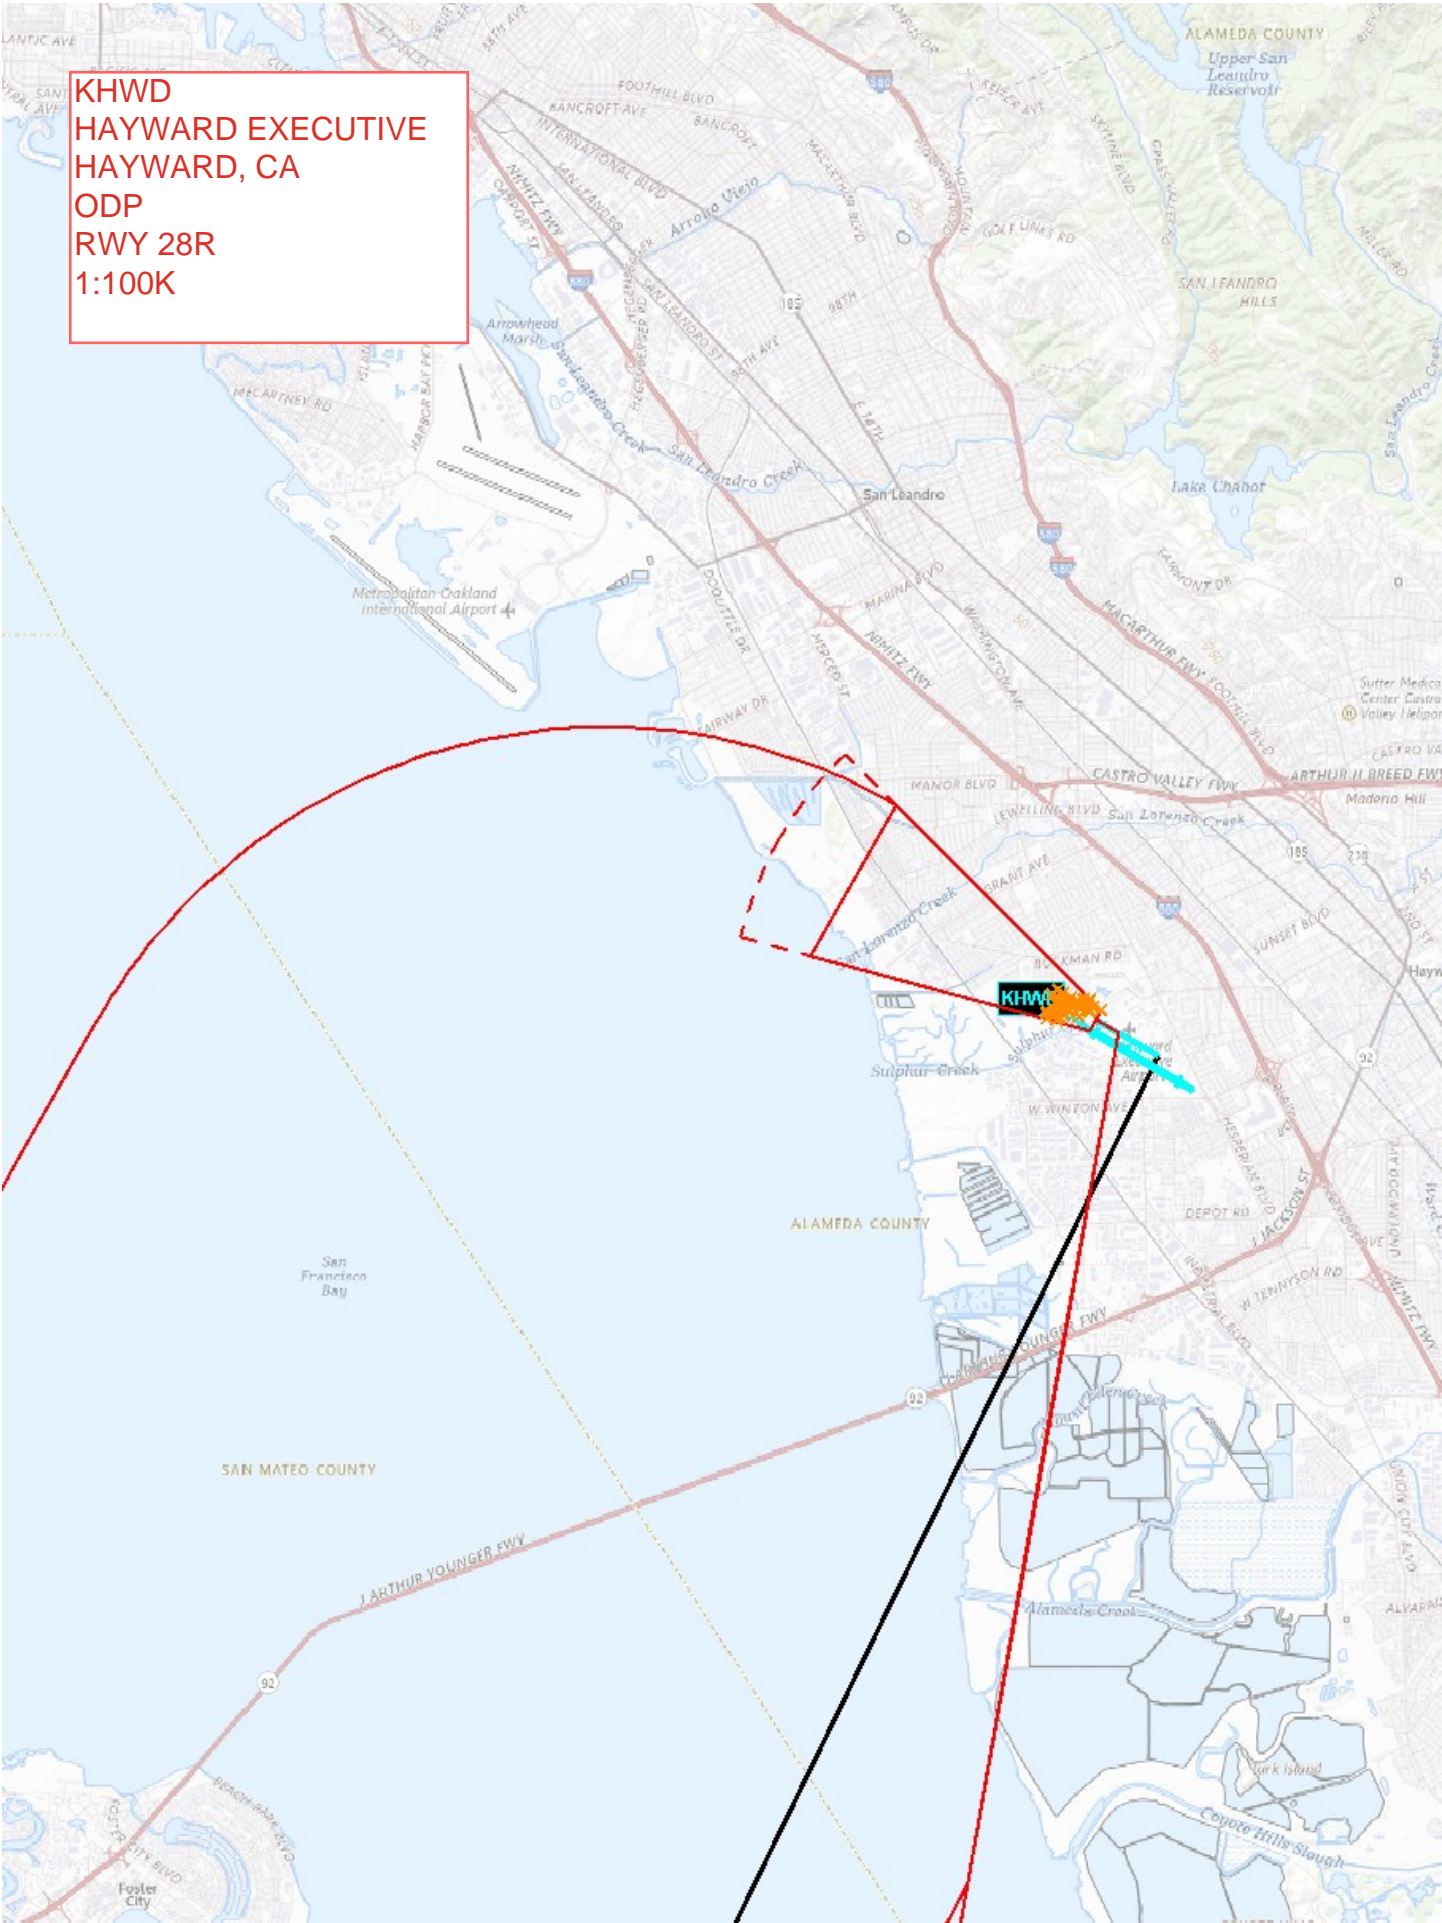

KHWD
HAYWARD EXECUTIVE
HAYWARD, CA
ODP
RWY 10L
1:500K

CTC NORCAL APP WITHIN 20 NM ON 127.0 298
OBS MANDATING ROUTE TERRAIN+AAO (4035)
TP_541402_DIVB

CTC NORCAL APP WITHIN 20 NM ON 125.35 3545

KHWD: RWY 10L CG/CGTA TREE (192)
06-305847

NOTICE
FOR REASONS OF NATIONAL SECURITY
PILOTS ARE REQUESTED TO AVOID FLIGHT
AT AND BELOW 800' AGL IN THIS AREA

CTC NORCAL APP WITHIN 20 NM ON 121.3 270.35

CTC NORCAL APP WITHIN 20 NM ON 133.95 317.6

CTC NORCAL APP WITHIN 20 NM ON 135.2 379.4

CTC NORCAL APP WITHIN 20 NM ON 120.1 290.25



KHWD
HAYWARD EXECUTIVE
HAYWARD, CA
ODP
RWY 10R
1:500K

OBS MANDATING ROUTE TERRAIN+AAO (4035)
TP_541402_DIVB

CTC NORCAL APP WITHIN
20 NM ON 125.35 3545

NOTICE
FOR REASONS OF NATIONAL SECURITY
PILOTS ARE REQUESTED TO AVOID FLIGHT
AT AND BELOW 800' AGL IN THIS AREA

CTC NORCAL APP WITHIN
20 NM ON 121.3 270.35

CTC NORCAL APP WITHIN
20 NM ON 133.95 317.6

CTC NORCAL APP WITHIN
20 NM ON 135.2 379.4

CTC NORCAL APP WITHIN
20 NM ON 120.1 290.25



KHWD
HAYWARD EXECUTIVE
HAYWARD, CA
ODP
RWY 28L
1:500K

OBS MANDATING ROUTE TERRAIN+AAO (4035)
TP_541402_DIVB

CTC NORCAL APP WITHIN
20 NM ON 125.35 3545

NOTICE
FOR REASONS OF NATIONAL SECURITY
PILOTS ARE REQUESTED TO AVOID FLIGHT
AT AND BELOW 800' AGL IN THIS AREA

CTC NORCAL APP WITHIN
20 NM ON 121.3 270.35

CTC NORCAL APP WITHIN
20 NM ON 133.95 317.6

CTC NORCAL APP WITHIN
20 NM ON 135.2 379.4

CTC NORCAL APP WITHIN
20 NM ON 120.1 290.25



KHWD
HAYWARD EXECUTIVE
HAYWARD, CA
ODP
RWY 28R
1:500K

OBS MANDATING ROUTE TERRAIN+AAO (4035)
TP_541402_DIVB

CTC NORCAL APP WITHIN
20 NM ON 125.35 3545

NOTICE
FOR REASONS OF NATIONAL SECURITY
PILOTS ARE REQUESTED TO AVOID FLIGHT
AT AND BELOW 800' AGL IN THIS AREA

CTC NORCAL APP WITHIN
20 NM ON 121.3 270.35

CTC NORCAL APP WITHIN
20 NM ON 133.95 317.6

CTC NORCAL APP WITHIN
20 NM ON 135.2 379.4

CTC NORCAL APP WITHIN
20 NM ON 120.1 290.25

