

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 10/29/2026	APWS Task ID: 3A8C9F8878AB4E53BA80E48DE0D68D82	APWS Project ID: 332990F92D194078BF599049A37BE904
Procedure: RNAV (GPS) RWY 31 AMDT 2A		Enroute: NO	Specialist: Smith, Bryant		Agreement Number:
Airport ID: KBDH			Airport City: WILLMAR		State: MN
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: ACTIVE AIRNAV DATA USED. ABBREVIATED AMENDMENT CANCELS NOTAM: !FDC 6/7320 BDH IAP WILLMAR MUNI/JOHN L RICE FLD, WILLMAR, MN. RNAV (GPS) RWY 31, AMDT 2... LNAV/VNAV VISIBILITY 7/8. CONTACT: ROB HAMILTON A433 MANAGER, 405-954-4608 QUALITY 41 CHECKED QUALITY 47 CHECKED					

FIPC BASIC FORM							
PROCEDURE: RNAV (GPS) RWY 31 AMDT 2A			AIRPORT NAME: WILLMAR MUNI/JOHN L RICE FLD		AIRPORT ID: KBDH	SPECIAL CONTROL NO: BG-07-319-26	
FAC ID: KBDH31.02		CITY: WILLMAR			ST: MN	ORIG CHART DATE: 10/29/2026	
DFL TYPE: PROC/S	THIRD PARTY: ☐ YES	EST. TIME ON SITE: 0.4	REIMB. NUMBER:		PTS TASK ID: 3A8C9F8878AB4E53BA80E48DE0D68D82		
PREFLIGHT NOTES							
REVIEWER: scott wiebe					DATE: 08/27/2026		
COMMENTS:					CHECK ONE:		
					☒ FLT CK REQ ☐ NFCR ☐ REJECT		
							YES
					CPV COMPLETE?		X
PROCEDURE RESULTS							
INSPECTION DATE: 08/27/2026		CREW #: VN219	N #: N83	INSTRUMENT PROCEDURE STATUS: ☒ SAT ☐ SAT W/CHANGES ☐ UNSAT		ARINC CODING: ☒ SAT ☐ SAT/GOLD ☐ UNSAT	
FLIGHT INSPECTOR SIGNATURE: scott wiebe @ 08/27/2026 17:40			PRINTED NAME: WIEBE, GREGORY SCOTT				NOTAM INITIATED? ☐ YES ☒ NO
FLIGHT INSPECTOR REMARKS: No electronic data recorded. Meets the requirements of 8200.52A, Para 13-14e and TFIG#163							
IN-FLIGHT OBSTACLE REPORT							
OBSTRUCTION ID #:	COORDINATES OR LOCATION:		GNSS ALTITUDE (MSL):		BAROMETRIC ALTITUDE (MSL):		HEIGHT ABOVE GROUND LEVEL:

WAAS CH 72632 W31A	APP CRS 306°	Rwy Idg TDZE Apt Elev	5500 1126 1126
--	------------------------	-----------------------------	---

OLD

RNAV (GPS) RWY 31

WILLMAR MUNI/JOHN L RICE FLD (BDH)

RNP APCH - GPS.


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Olivia altimeter setting; increase LPV DA to 1381 feet; increase LNAV/VNAV DA to 1475 feet and all visibilities $\frac{1}{8}$ SM; increase all MDAs 60 feet and LNAV visibility Cat C and D $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using Olivia Rgnl altimeter setting.

MISSED APPROACH: Climb to 2800 direct BEESE and hold.


AWOS-3PT
118.75

MINNEAPOLIS CENTER
125.5 323.1

UNICOM
122.8 (CTAF) 0

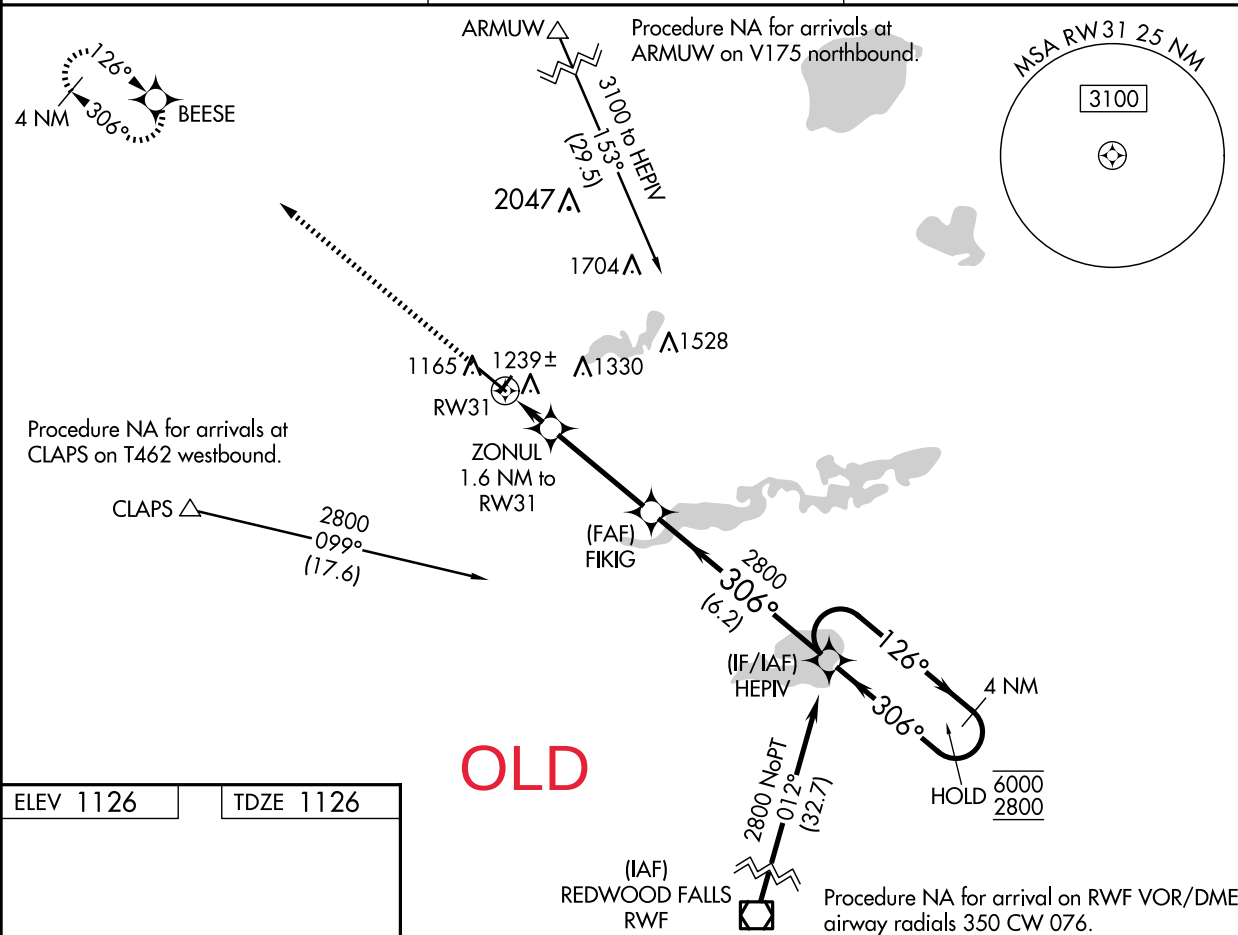

ELEV 1126 TDZE 1126

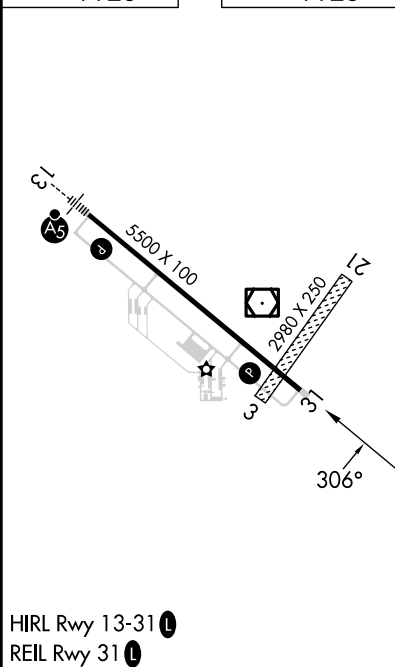

2800	BESEE	FIKIG	HEPIV	4 NM Holding Pattern
ZONUL 1.6 NM to RW31	2800	2800	6000 2800	
1 NM to RW31	1680	306°	126°	GP 3.00° TCH 49
1 NM	0.6	3.5 NM	6.2 NM	
CATEGORY	A	B	C	D
LPV DA	1326- $\frac{3}{4}$ 200 (200- $\frac{3}{4}$)			
LNAV/VNAV DA	1420- $\frac{3}{4}$ 294 (300- $\frac{3}{4}$)			
LNAV MDA	1500-1 374 (400-1)			