

LOC/DME I-GBD 111.9 Chan 56	APP CRS 356°	Rwy Ldg TDZE 1883 Apt Elev 1887
---	------------------------	---

ILS or LOC RWY 36
GREAT BEND MUNI (GBD)



ADF required.

When local altimeter setting not received, use LYO altimeter setting and increase S-ILS 36 DA to 2179 feet; increase all MDAs 100 feet and BROTO fix minimums visibility Cat C/D ¼ SM, and S-LOC 36 visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM. For inop ALS, increase S-LOC Cats C/D visibility to 1 ½ SM. *2460 when using LYO altimeter setting.

MALSRL
AS

MISSED APPROACH:
Climb to 2900 then climbing left turn to 3600 direct BABSY LOM and hold.

AWOS-3PT 119.275	KANSAS CITY CENTER 118.8 322.425	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

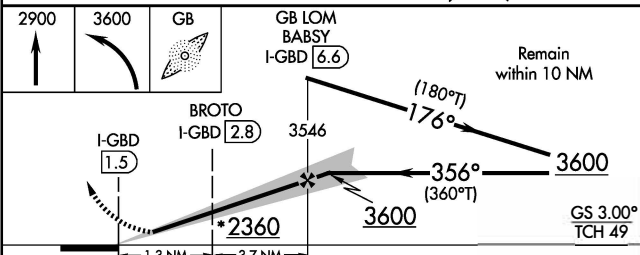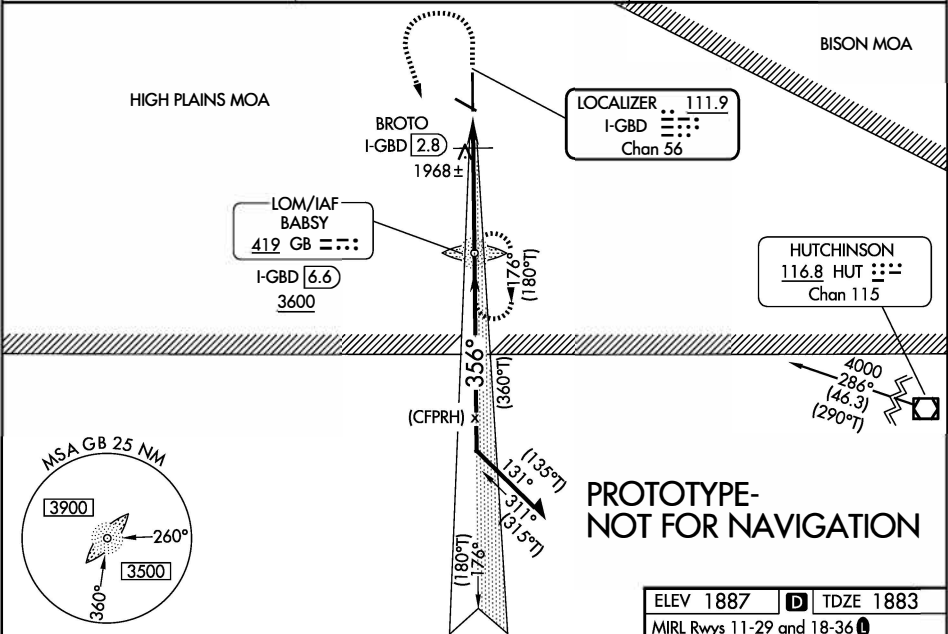

CATEGORY	A	B	C	D
S-ILS 36	2083-½ 200 (200-½)			
S-LOC 36	2360-½	477 (500-½)	2360-1	477 (500-1)
CIRCLING	2360-1	473 (500-1)	2520-1¾ 633 (700-1¾)	2640-2½ 753 (800-2½)
BROTO DME FIX MINIMUM				
S-LOC 36	2220-½ 337 (400-½)			
CIRCLING	2300-1 413 (500-1)	2340-1 453 (500-1)	2520-1¾ 633 (700-1¾)	2640-2½ 753 (800-2½)

ELEV 1887 D TDZE 1883
MIRL Rwy 11-29 and 18-36 0
REIL Rwy 18 0

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42