

Flight Procedures Cover Page	Task Action: P-NOTAM	Task Type: IAP	Estimated Chart Date: 09/03/2026	APWS Task ID: 3FCA329B6C68422B811B804CA8920E6A	APWS Project ID: C68A3C3F826F4B13A305F7329884C181
Procedure: RNAV (GPS) RWY 13 AMDT 2B		Enroute: NO	Specialist: Johnson, Timothy		Agreement Number:
Airport ID: KPIR			Airport City: PIERRE		State: SD
Facility ID:	Facility Type:	Flight Inspection Remark Type:			

Procedure Comments:
Visibility Initiative (Garmin) - Update IAP visibility minimums IAW Order 8260.3, Chapter 3, Section 3-3. Visibility Minimums.

PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021, SUBJECT: GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/VALIDATION.

CONTACT: CASEY HILL (405) 954-0624.



WAAS CH 53404 W13A	APP CRS 133°	Rwy Ldg 6900 TDZE 1731 Apt Elev 1744
--	------------------------	---



RNAV (GPS) RWY 13

PIERRE RGNL (PIR)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F).
DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 4000 direct HOGEX and hold.

ASOS 119.025	MINNEAPOLIS CENTER 125.1 269.1	CTAF 122.70	UNICOM 122.95
------------------------	--	-----------------------	-------------------------

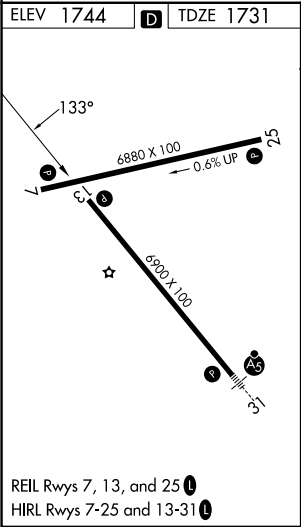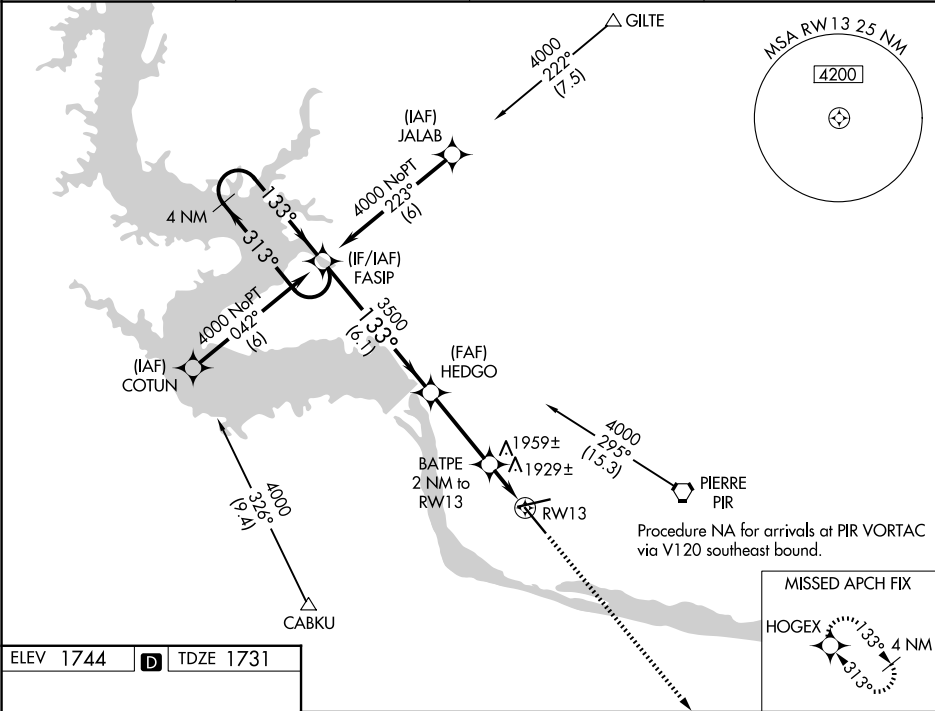

CATEGORY	A	B	C	D
LPV DA	1981- ³ / ₄ 250 (300- ³ / ₄)			
LNAV/ VNAV DA	2285-2 554 (600-2)			
LNAV MDA	2220-1 489 (500-1)	2220-1½ 489 (500-1½)	2220-1½ 489 (500-1½)	2220-1½ 489 (500-1½)
CIRCLING	2240-1 496 (500-1)	2300-1 556 (600-1)	2400-1¾ 656 (700-1¾)	2460-2¼ 716 (800-2¼)