

WAAS CH 97525 W31A	APP CRS 313°	Rwy Ldg TDZE 725 Apt Elev 727	4501
--	------------------------	---	-------------

RNAV (GPS) RWY 31

VIRGIL I GRISSOM MUNI (BFR)


RNP APCH - GPS.

▼


When local altimeter setting not received, use BMG altimeter setting and increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and LP visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM. Procedure NA at night. Rwy 31 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 2500 direct KOXVU and hold.

AWOS-3PT 119.125	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

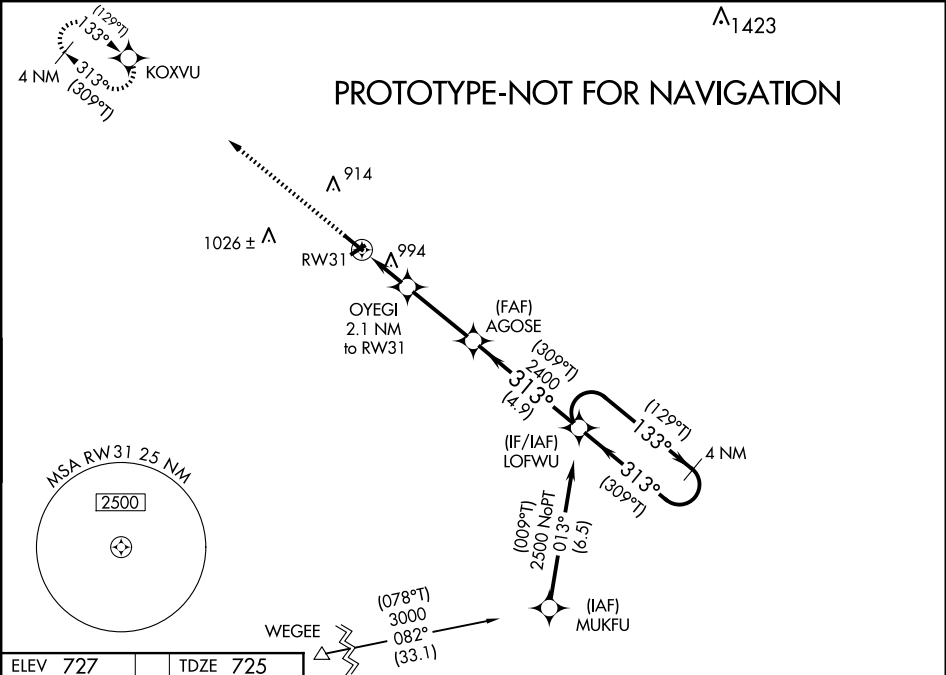

ELEV 727	TDZE 725
----------	----------

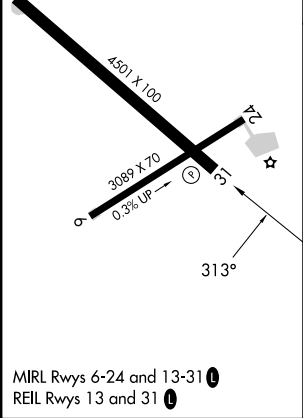

2500		KOXVU		Visual Segment - Obstacles.		4 NM Holding Pattern	
				AGOSE		LOFWU	
		OYEGI 2.1 NM to RW31		2400		2500	
		RW31		1420			
		2.1 NM		3 NM		4.9 NM	
CATEGORY		A	B	C	D		
LP MDA		1260-1	535 (600-1)	1260-1½	535 (600-1½)		
LNAV MDA		1260-1	535 (600-1)	1260-1½	535 (600-1½)		
CIRCLING		1300-1	573 (600-1)	1380-1¾ 653 (700-1¾)	1380-2 653 (700-2)		