

APP CRS	Rwy Ldg	9501
094°	TDZE	1016
	Apt Elev	1027

RNAV (RNP) Z RWY 9

KANSAS CITY INTL (MCI)



RNP AR APCH - GPS. Authorization required. From SPANI, STRAM: RF.

▼ For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.20 all Cats visibility to RVR 4500; increase RNP 0.30 all Cats visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 4000 direct DUSTN and on track 092° to LYMES and hold.

D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8
-------------------	-------------------------------------	-------------------------------------	------------------

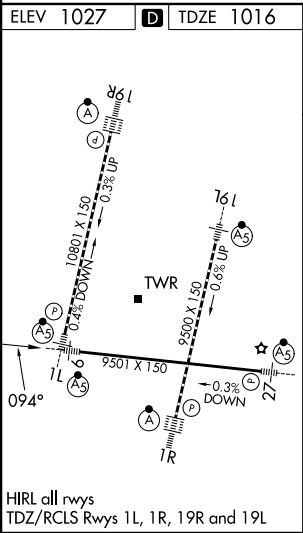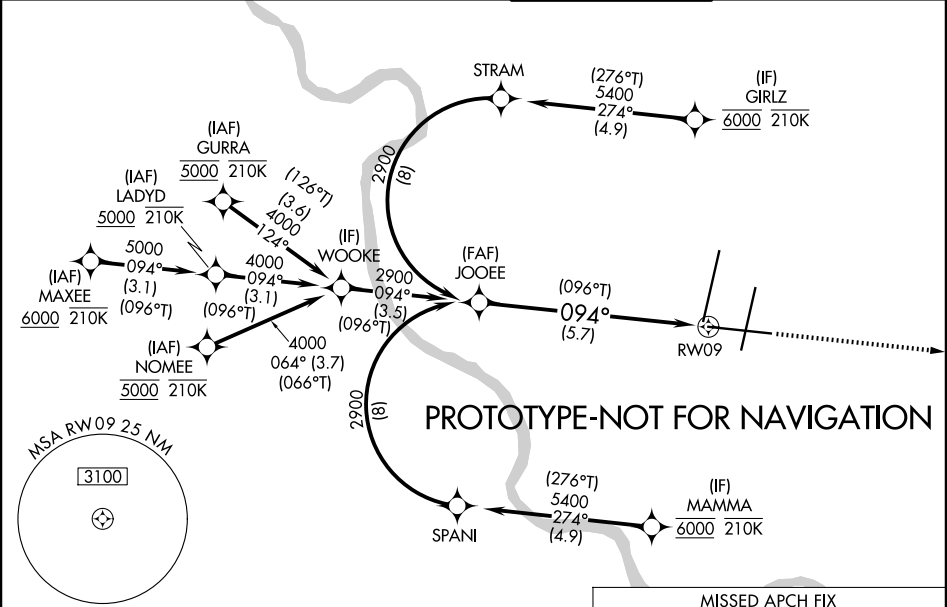

MISSED APCH FIX
(094°T)
DUSTN (21.8)
LYMES (274°T)
(not to scale)
4 NM

4000

DUSTN

tr 092°

LYMES

See planview for multiple IF locations.

JOOEE 2900

2900

GP 3.00°

TCH 56

5.7 NM

RW09

CATEGORY	A	B	C	D
RNP 0.20 DA		1336/24	320 (400-½)	
RNP 0.30 DA		1418/40	402 (400-¾)	

AUTHORIZATION REQUIRED