


Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 06/15/2023	APWS Task ID: 46FCA839CD1B452B8ABF4052F3BA394A	APWS Project ID: 20A93B1471454BC580773D32CB3CABC6
Procedure: ILS OR LOC RWY 28 AMDT 15		Enroute: NO	Specialist: Mendenhall, Christopher		Agreement Number:
Airport ID: KTVC			Airport City: TRAVERSE CITY		State: MI
Facility ID: TVC	Facility Type: ILS	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: PROCEDURE DEVELOPED UTILIZING ACTIVE DATA. GPS REQUIRED CONTACT JASON KRETSCHMER (405) 919-4059 Digitally signed by JASON KRETSCHMER Mar 06, 2023 QUALITY 29 CHECKED 3/3/23 J. DuBois QUALITY 9 CHECKED					

[illegible]

LOC I-TVC	APP CRS	Rwy Idg	7016
110.7	279°	TDZE	616
		Apt Elev	624

ILS or LOC RWY 28
CHERRY CAPITAL (TVC)

RNPAPCH - GPS.			MALSR 	MISSED APPROACH: Climb to 1100 then climbing left turn to 3000 direct TVC VOR/DME and hold, continue climb-in-hold to 3000.	
Aircraft not GPS equipped - RADAR required for procedure entry.					
V A S-LOC 28 minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2½ SM. AYATA FIX minimums: For inop ALS, increase S-LOC 28 Cats C and D visibility to 2 SM.					
ATIS	MINNEAPOLIS CENTER	TRAVERSE CITY TOWER ★	GND CON	UNICOM	
119.175	132.9 338.3	124.2 (CTAF) 0 348.6	121.8 348.6	122.95	

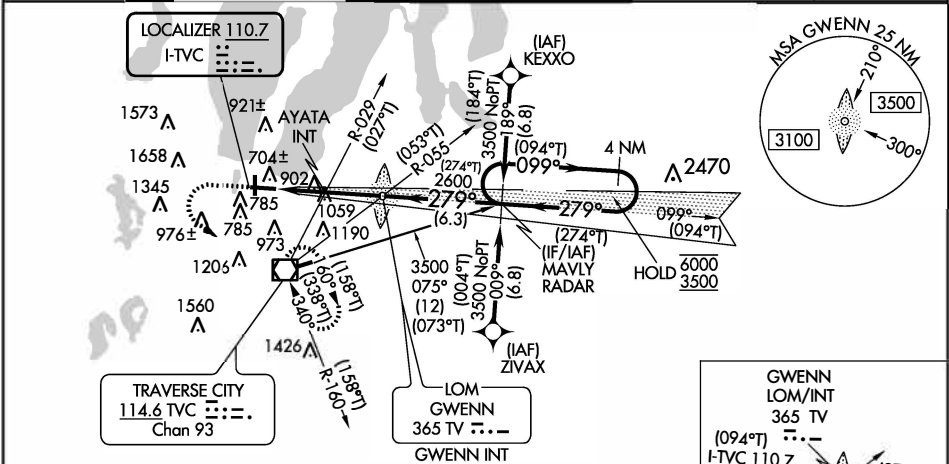

PROTOTYPE-NOT FOR NAVIGATION

Procedure NA for arrival on TVC VOR/DME airway radials 035 CW 152.

ELEV 624

TDZE 616

1100

3000

TVC

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).

81

5378 X 150

794±

7016 X 150

36

279°

AYATA INT

2496

1440

2600

279°

274°T

099°

279°

274°T

GS 3.00° TCH 52

GWENN LOM/INT

MAVLY RADAR

4 NM Holding Pattern

094°T

099°

6000

3500

CATEGORY

A

B

C

D

S-ILS 28

816-½

200 (200-½)

S-LOC 28

1440-½

824 (900-½)

1440-¾

824 (900-¾)

1440-1⅞

824 (900-1⅞)

CIRCLING

1440-1¼

816 (900-1¼)

1440-2½

816 (900-2½)

1720-3

1096 (1100-3)

AYATA FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)

S-LOC 28

1320-½

704 (700-½)

1320-1⅝

704 (700-1⅝)

CIRCLING

1320-1

696 (700-1)

1420-2¼

796 (800-2¼)

1720-3

1096 (1100-3)

FAF to MAP 5.8 NM

Knots

60

90

120

150

180

Min:Sec

5:48

3:52

2:54

2:19

1:56


HIRL Rwy 10-28

MIRL Rwy 18-36

REIL Rwy 36

ILS or LOC RWY 28
CHERRY CAPITAL (TVC)

MISSED APPROACH:
Climb to 1100 then
climbing left turn to
3000 direct TVC
VOR/DME and hold,
continue climb-in-hold
to 3000.

UNICOM
122.95

CATEGORY	A	B	C	D
S-ILS 28	816-1½ 200 (200-½)			
S-LOC 28	1480-¾ 864 (900-¾)	1480-2 864 (900-2)		
 CIRCLING	1480-1¼ 856 (900-1¼)	1500-2½ 876 (900-2½)	1720-3 1096 (1100-3)	
AYATA FIX MINIMUMS				
S-LOC 28	1360-½ 744 (800-½)	1360-¾ 744 (800-¾)	1360-1¾ 744 (800-1¾)	
 CIRCLING	1360-1 736 (800-1)	1360-1¼ 736 (800-¼)	1500-2½ 876 (900-2½)	1720-3 1096 (1100-3)

CHERRY CAPITAL (TVC)
ILS or LOC RWY 28

