APP CRS	Rwy ldg	3704
238°	TDZE	474
	APT Elev	474

RNAV (GPS) RWY 24

POTSDAM MUNI/DAMON FLD (KPTD)

RNP APCH - GPS.

Rwy 24 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use MSS altimeter setting and increase all MDA 80 feet; increase LNAV and Circling Cat C visibility 1/4 SM.

MISSED APPROACH: Climbing left turn to 2400 direct WURIP and hold.

AWOS-3P	BOSTON CENTER	UNICOM
118.325	135.25 377.1	122.8 (CTAF) L

PROTOTYPE-NOT FOR NAVIGATION

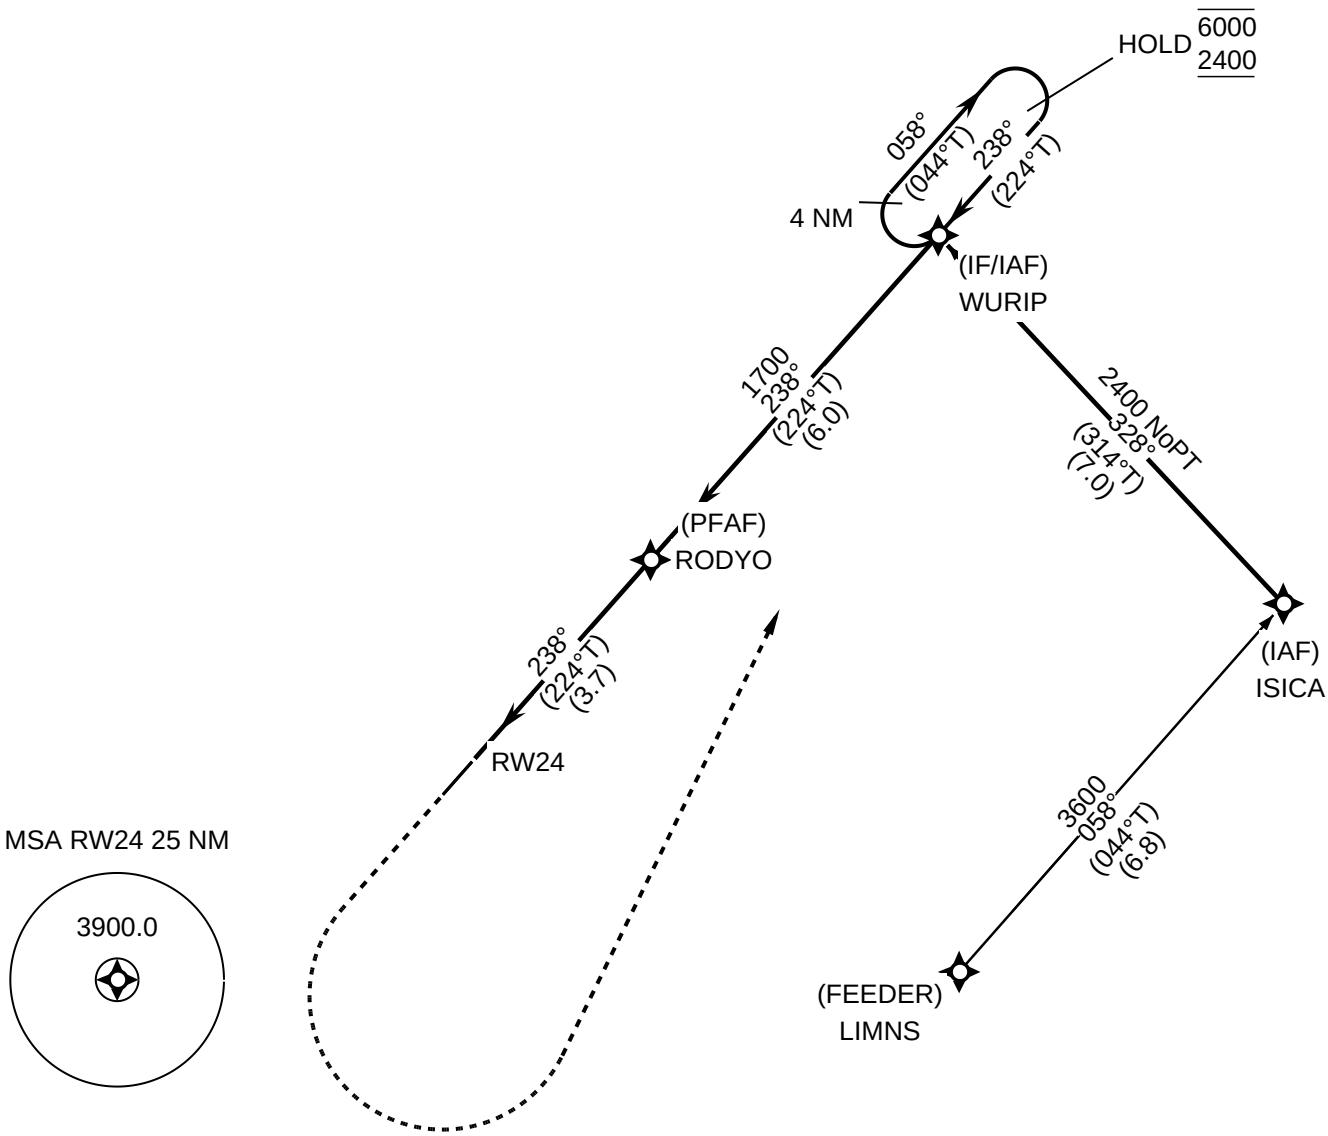

874	2400	WURIP

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 41).

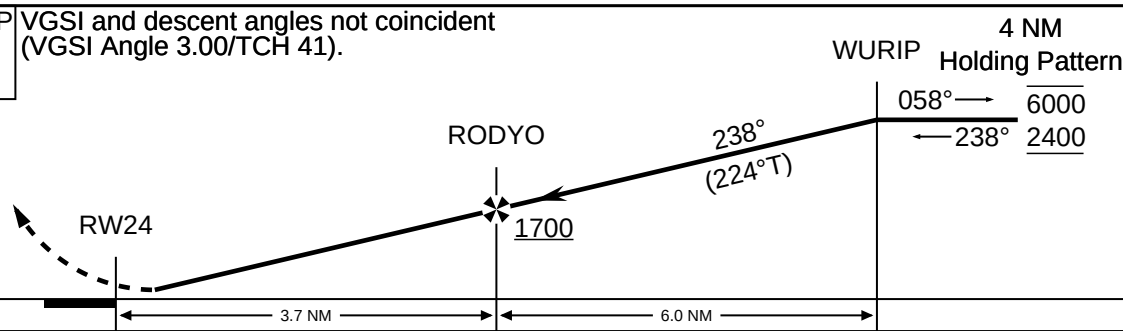

CATEGORY	A	B	C	D
LNAV	880-1 406		880-1 1/8 406	NA
CIRCLING	920-1 446	980-1 506	1040-1 1/2 566	NA