



Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: STAR	Estimated Chart Date: 09/05/2024	APWS Task ID: 4FD78CE59C434CA88DE3FC3C6EA4FF80	APWS Project ID: 13FF286B992B4A9791BEAF097B2F54D4
Procedure: STAR ANTHM (RNAV) FOUR BALTIMORE MD KBWI		Enroute: YES	Specialist: Bradshaw, Henry		Agreement Number:
Airport ID: KBWI			Airport City: BALTIMORE		State: MD
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
<p>Procedure Comments:</p> <p>PROCEDURE REDESIGNED PER PBN</p> <p>AFS APPROVAL REQUESTED FOR: DECLARATION LEG LENGTH FAILURE IN FLAAG TO STARZ SEGMENT DESCENT GRADIENT IN LUNDY TO CURBY SEGMENT DESCENT GRADIENT IN OLBAY TO CRABZ SEGMENT</p> <p>CONTACT: ALLAN WILL (AJV-A423) (405) 954-6103</p> <p>04/23/24: THIS IS AN UPDATED COPY OF THE FORM DEVELOPED ON 2/28/2024. 8260-17.1: 1. PROCEDURAL DATA NOTES: UPDATED "NOTE: ARTCC WILL ISSUE LANDING DIRECTION (EAST OR WEST). POTOMAC TRACON WILL ISSUE RWY ASSIGNMENT." TO "NOTE: LANDING NORTH USE RUNWAY 33L TRANSITION, LANDING SOUTH USE RUNWAY 15R TRANSITION, LANDING EAST USE RUNWAY 10 TRANSITION, LANDING WEST USE RUNWAY 28 TRANSITION. EXPECT RUNWAY ASSIGNMENT FROM TRACON PRIOR TO ANTHM." – ATC REQUEST. 2. ADDITIONAL FLIGHT DATA: REMOVED "CHART: CAUTION: UNMARKED AEROSTAT TETHERED TO CABLE WITHIN R-4001C UP TO 10000 MSL." – ATC REQUEST - DISMANTLED</p> <p>05/16/24: THIS IS A CORRECTED COPY OF THE FORM APPROVED ON 05/06/24. 8260-17.1: 1. ADDITIONAL FLIGHT DATA: CHANGED "CHART: P56A, P56B, R4001A, R4002B, R4001C." TO "CHART: P56A, P56B, R4001A, R4001B, R4001C." – CORRECTED SPELLING</p> <div><div></div><div><div>05/17/2024</div><div></div></div></div>					

FIPC DME/DME FORM						
PROCEDURE: STAR ANTHM (RNAV) FOUR BALTIMORE MD KBWI			AIRPORT NAME: BALTIMORE/WASHINGTON INTL		AIRPORT ID: KBWI	SPECIAL CONTROL NO: YG-03-262-24
FAC ID: ANTHM4		CITY: BALTIMORE			ST: MD	ORIG CHART DATE: 09/05/2024
DFL TYPE: PROC/D	THIRD PARTY: <input type="checkbox"/> YES	EST. TIME ON SITE: 1.0	REIMB. NUMBER:	PTS TASK ID: 4FD78CE59C434CA88DE3FC3C6EA4FF80		
PREFLIGHT NOTES						
REVIEWER: michael g campbell					DATE: 04/23/2024	
COMMENTS:					CHECK ONE: <input checked="" type="checkbox"/> FLT CK REQ <input type="checkbox"/> NFCR <input type="checkbox"/> REJECT	
						YES NO
					CPV COMPLETE?	X
PROCEDURE RESULTS						
INSPECTION DATE: 04/23/2024	CREW #: VN504	N #: N80	INSTRUMENT PROCEDURE STATUS: <input checked="" type="checkbox"/> SAT <input type="checkbox"/> SAT W/CHANGES <input type="checkbox"/> UNSAT		ARINC CODING: <input checked="" type="checkbox"/> SAT <input type="checkbox"/> SAT/GOLD <input type="checkbox"/> UNSAT	
FLIGHT INSPECTOR SIGNATURE: michael g campbell @ 04/23/2024 17:59			PRINTED NAME: CAMPBELL, MICHAEL GRANT			NOTAM INITIATED? <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
FLIGHT INSPECTOR REMARKS:						
DME/DME STATUS: <input checked="" type="checkbox"/> SAT <input type="checkbox"/> UNSAT		SPECIALIST SIGNATURE: david c-ctr cook @ 05/01/2024 14:45			PRINTED NAME: Dave Cook	
SPECIALIST REMARKS: All ESV's recorder by Flight Inspection aircraft. Satisfactory for DME/DME/IRU flight.						
IN-FLIGHT OBSTACLE REPORT						
OBSTRUCTION ID #:	COORDINATES OR LOCATION:	GNSS ALTITUDE (MSL):	BAROMETRIC ALTITUDE (MSL):	HEIGHT ABOVE GROUND LEVEL:		

FIPC BASIC FORM								
PROCEDURE: STAR ANTHM (RNAV) FOUR BALTIMORE MD KBWI			AIRPORT NAME: BALTIMORE/WASHINGTON INTL		AIRPORT ID: KBWI	SPECIAL CONTROL NO: YG-03-262-24		
FAC ID: ANTHM4		CITY: BALTIMORE			ST: MD	ORIG CHART DATE: 09/05/2024		
DFL TYPE: PROC/D	THIRD PARTY: <input type="checkbox"/> YES	EST. TIME ON SITE: 1.0	REIMB. NUMBER:		PTS TASK ID: 4FD78CE59C434CA88DE3FC3C6EA4FF80			
PREFLIGHT NOTES								
REVIEWER: michael g campbell					DATE: 04/23/2024			
COMMENTS:					CHECK ONE: <input checked="" type="checkbox"/> FLT CK REQ <input type="checkbox"/> NFCR <input type="checkbox"/> REJECT			
							YES	NO
					CPV COMPLETE?		X	
PROCEDURE RESULTS								
INSPECTION DATE: 04/23/2024		CREW #: VN504	N #: N80	INSTRUMENT PROCEDURE STATUS: <input checked="" type="checkbox"/> SAT <input type="checkbox"/> SAT W/CHANGES <input type="checkbox"/> UNSAT		ARINC CODING: <input checked="" type="checkbox"/> SAT <input type="checkbox"/> SAT/GOLD <input type="checkbox"/> UNSAT		
FLIGHT INSPECTOR SIGNATURE: michael g campbell @ 04/23/2024 17:59			PRINTED NAME: CAMPBELL, MICHAEL GRANT			NOTAM INITIATED? <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO		
FLIGHT INSPECTOR REMARKS:								
IN-FLIGHT OBSTACLE REPORT								
OBSTRUCTION ID #:	COORDINATES OR LOCATION:		GNSS ALTITUDE (MSL):		BAROMETRIC ALTITUDE (MSL):		HEIGHT ABOVE GROUND LEVEL:	



Federal Aviation Administration

Memorandum

Date: November 8, 2023

To: Christopher Hope, Manager, Flight Technologies and Procedures Division
THRU: Romana Wolf, Manager, Flight Procedures and Airspace Group

From: Bev Bordy, Manager, Instrument Flight Procedures Coordination Team, AJV-A45

Prepared by: Jeff Rutledge, Sr. ATC Specialist, NAVTAC CTR Support

Subject: Approval Request: Baltimore, MD (KBWI) ANTHM (RNAV) STAR
DECLARATION LEG LENGTH FAILURE

FLAAG to STARZ SEGMENT

The requirements stated in Order 8260.3F, (United States Standard for Terminal Instrument Procedures (TERPS)), paragraph 2-2-10.a. are:

“2-2-10. Deceleration. Sufficient distance and a reduced descent gradient are required prior to any fix with a speed restriction. STARs not meeting the requirements of this paragraph may be authorized with Flight Standards approval (see paragraph 1-4-2).

a. Where deceleration is required but descent is not permitted (for example, between two fixes with the same mandatory altitudes) or is not required (for example, between two fixes with the same minimum altitudes), provide a minimum distance of at least 4 NM prior to a fix with a speed reduction of 40 KIAS or less. For deceleration greater than 40 KIAS, allow 1 NM between fixes for every 10 knots of deceleration required. For example, a deceleration of 10, 20, 30, or 40 KIAS requires a minimum length of 4 NM; a deceleration of 50 KIAS requires a minimum length of 5 NM; a deceleration of 60 KIAS requires 6 NM.

Paragraph 1-4-2. ...states in part:

“Nonstandard IFP. ...obstacles, navigation information, or traffic congestion may require special consideration where justified by operational requirements. In such cases, nonstandard IFPs that deviate from these criteria may be approved, provided they are documented, and an equivalent level of safety exists...”

RSO179: [Approval Required] The length of the leg from FLAAG to STARZ is 7.76NM. This leg must be at least 12.0 NM long due to deceleration from 250.0 KIAS to 210 KIAS between 6000.0 ft. MSL to 4000.0 ft. MSL. Flight Standards approval is required.

The segment with the restrictions of at 11000 at ROKTT 250KIAS followed by cross STARZ between 4000/5000 and 210KIAS requires a 12 NM length, per the 8260.3F paragraph 2-2-10 a, for a reduction of 10- 40Kts. The deceleration required by the ROKTT-STARZ segment is 40 Kts. The reduction from 250 Kts to 210 Kts from ROKTT to STARZ is 5.86 NM. The previous fix ANTHM has no restrictions therefore the aircraft will be at or below 250 KIAS 17.65 NM prior to reaching STARZ. The distance from ANTHM to STARZ is 30.66 NM allowing ample distance to reduce speed to 210 KIAS. The KBWI ANTHM STAR has been in publication for several years and there have been no instances where aircraft could not make this restriction reported.

Route Evaluation for NUSMM:BUBBI:KBWI:RW10											
NUSMM:BUBBI:KBWI:RW10 Evaluation Results Part 1/2											
Leg Tp	End Pt	Turn Tp	Alt Restr	Alt Restr 2	Spd Restr	Turn Ang	Leg Length	Min Seg Length	Descent Gradient	Max Descent Grad	Min Decel Dist
IF	NUSMM [IFPA r1 07-19-18 TO UNK]						0.0	0.0	0.0	0.0	0.0
TF	KEMAN [IFPA r4 02-01-18 TO UNK]	FLY_BY				2.34	37.26	1.0	0.0	0.0	0.0
TF	BYNER [IFPA r0 11-13-14 TO UNK]	FLY_BY				1.61	21.43	1.0	0.0	0.0	0.0
TF	LUNDY [IFPA r3 11-05-20 TO UNK]	FLY_BY	29000.00			0.63	24.07	1.0	0.0	0.0	0.0
TF	CURBY [IFPA r1 11-05-20 TO UNK]	FLY_BY	+21000.00	-24000.0		0.64	23.28	1.0	343.22	330.0	0.0
TF	KEESH [IFPA r2 11-05-20 TO UNK]	FLY_BY				0.66	10.0	1.0	262.77	330.0	0.0
TF	BUBBI [IFPA r3 11-13-14 TO UNK]	FLY_BY	+15000.00	-18000.0	280.0	16.37	12.81	3.19	262.77	330.0	0.0
TF	SHEPH [IFPA r0 10-15-15 TO UNK]	FLY_BY	-15000.00			0.02	8.0	3.19	0.0	330.0	0.0
TF	EAGLL [IFPA r0 11-13-14 TO UNK]	FLY_BY	+12000.00	-13000.0		0.5	10.68	1.0	280.69	330.0	0.0
TF	ANTHM [IFPA r0 11-13-14 TO UNK]	FLY_BY				3.89	17.3	1.0	42.17	330.0	0.0
TF	ROKTT [IFPA r1 03-31-16 TO UNK]	FLY_BY	11000.00		250.0	0.12	6.4	1.0	42.17	330.0	0.0
TF	FLAAG [IFPA r1 03-31-16 TO UNK]	FLY_BY	+6000.00	-7000.0		79.52	16.5	2.83	302.91	320.4	0.0
TF	STARZ	FLY_BY	+4000.00	-5000.0	210.0	31.86	7.76	3.9	257.78	318.0	12.0
TF	STRPS	FLY_BY	4000.00		210.0	38.44	3.08	2.05	0.0	250.0	0.0
TF	BRAYV [IFPA r1 03-31-16 TO UNK]	FLY_BY				36.93	3.98	2.03	0.0	250.0	0.0
TF	SPNGL	FLY OVER	4000.00				2.09	1.05	0.0	250.0	0.0
VM							0.0	0.0	0.0	0.0	0.0

Consideration was given to removing and or changing the restrictions at ROKTT and or STARZ. However, to allow aircraft to be configured for the segments following STARZ restrictions remained unchanged since there has never been a reported difficulty and was not an impediment to the safety or profile of the procedure.



Federal Aviation Administration

Memorandum

Date: November 8, 2023

To: Christopher Hope, Manager, Flight Technologies and Procedures Division
THRU: Romana Wolf, Manager, Flight Procedures and Airspace Group

From: Bev Bordy, Manager, Instrument Flight Procedures Coordination Team, AJV-A45

Prepared by: Jeff Rutledge, Sr. ATC Specialist, NAVTAC CTR Support

Subject: Approval Request: Baltimore, MD (KBWI) ANTHM (RNAV) STAR
Descent Gradient

LUNDY to CURBY Segment

The requirements stated in Order 8260.3F, (United States Standard for Terminal Instrument Procedures (TERPS), paragraph 2-2-8.a. are:

“(1) the maximum permissible gradient 10000 MSL and above is 330 ft/NM (approximately 3.11 degrees).

“(2) The maximum permissible DG below 10000 feet MSL is 318 ft. /NM (approximately 3.0 degrees).

“(3) When a STAR contains a descent between fixes that passes through 10000 feet MSL, the maximum permissible DG is between 318 ft. /NM and 330 ft. /NM and is in proportion to the amount of the altitude change that is below/above 10000 feet MSL. Use formula 2-2-1 to determine the maximum DG (DGmax) between fixes that contain a descent that passes through 10000 feet MSL.”

Paragraph 2-2-8.b states:

“When a gradient exceeds the maximum DG allowed in paragraph 2-2-8a, the STAR requires approval.”

Paragraph 1-4-2. ...states in part:

“Nonstandard IFP. ...obstacles, navigation information, or traffic congestion may require special consideration where justified by operational requirements. In such cases, nonstandard IFPs that deviate from these criteria may be approved, provided they are documented, and an equivalent level of safety exists...”

RSO144: [Approval Required] The Descent Gradient (343.21) from LUNDY to CURBY is greater than the Maximum Permissible Descent Gradient (330.0).

A computed descent gradient value from LUNDY to CURBY of 343.21 ft./NM resulted from the descent gradient being calculated from descending from the restriction of At FL290 at LUNDY (FL290 used) to cross CURBY AOB FL240 and At or ABOVE FL210 (FL240 B FL210) over 46.09 NM. The restriction after CURBY is at BUBBI, a restriction of AOB FL180 and AOA 15000 (FL180N15000). The restriction after BIBBI is AOB 15000 at SHEPH then AOB13000 and AOA12000 (13000B12000) at EAGLL and 11000 at JABRR then AOB 9000 at OLBAY. The distance required to descend from LUNDY at FL290 to OLBAY at 9000 is 111.26 NM. Calculating a descent gradient from LUNDY to OLBAY 111.26 NM resulted in a descent gradient of 329.4 ft./NM.

TF	LUNDY (IFPA r2 11-13-14 TO UNK)	FLY_BY	29000.00			0.63	24.07	1.0	0.0	0.0	0.0
TF	CURBY (IFPA r0 11-13-14 TO UNK)	FLY_BY	+21000.00	-24000.0		0.64	23.28	1.0	343.22	330.0	0.0
TF	KEESH (IFPA r1 10-15-15 TO UNK)	FLY_BY				0.66	10.0	1.0	262.77	330.0	0.0
TF	BUBBI (IFPA r3 11-13-14 TO UNK)	FLY_BY	+15000.00	-18000.0	280.0	16.37	12.81	3.19	262.77	330.0	0.0
TF	SHEPH (IFPA r0 10-15-15 TO UNK)	FLY_BY	-15000.00			0.02	8.0	3.19	0.0	330.0	0.0
TF	EAGLL (IFPA r0 11-13-14 TO UNK)	FLY_BY	+12000.00	-13000.0		0.5	10.68	1.0	280.69	330.0	0.0
TF	ANTHM (IFPA r0 11-13-14 TO UNK)	FLY_BY				1.96	17.3	1.0	32.1	330.0	0.0
TF	JABRR (IFPA r1 10-15-15 TO UNK)	FLY_BY	11000.00		250.0	0.0	13.84	1.0	32.1	330.0	0.0
TF	OLBAY (IFPA r0 10-15-15 TO UNK)	FLY_BY	-9000.00		250.0	16.0	15.39	1.78	129.9	324.0	0.0
TF	CRABZ (IFPA r1 10-15-15 TO UNK)	FLY_BY	+5000.00	-6000.0		39.1	10.99	3.35	364.0	318.0	0.0

Consideration was given to removing and or changing the restrictions at LUNDY, CURBY, SHEPH, EAGLL, JABRR and OLBAY. However, due to airspace constraints and traffic flows it was decided that the restrictions are necessary to prevent aircraft from entering adjacent airspace, prevent conflicts from other traffic and procedures, and reduce ATC workload due to required coordination, (point outs).



Federal Aviation Administration

Memorandum

Date: November 8, 2023

To: Christopher Hope, Manager, Flight Technologies and Procedures Division
THRU: Romana Wolf, Manager, Flight Procedures and Airspace Group

From: Bev Bordy, Manager, Instrument Flight Procedures Coordination Team, AJV-A45

Prepared by: Jeff Rutledge, Sr. ATC Specialist, NAVTAC CTR Support

Subject: Approval Request: Baltimore, MD (KBWI) ANTHM (RNAV) STAR
Descent Gradient

OLBAY to CRABZ Segment

The requirements stated in Order 8260.3F, (United States Standard for Terminal Instrument Procedures (TERPS), paragraph 2-2-8.a. are:

“(1) the maximum permissible gradient 10000 MSL and above is 330 ft/NM (approximately 3.11 degrees

“(2) The maximum permissible DG below 10000 feet MSL is 318 ft. /NM (approximately 3.0 degrees).

Paragraph 2-2-8.b states:

“When a gradient exceeds the maximum DG allowed in paragraph 2-2-8a, the STAR requires approval.”

Paragraph 1-4-2. ...states in part:

“Nonstandard IFP. ...obstacles, navigation information, or traffic congestion may require special consideration where justified by operational requirements. In such cases, nonstandard IFPs that deviate from these criteria may be approved, provided they are documented, and an equivalent level of safety exist.

RSO144: [Approval Required] The Descent Gradient (363.99) from OLBAY to CRABZ is greater than the Maximum Permissible Descent Gradient (318.0)

A computed descent gradient value from OLBAY to CRABZ of 363.99 ft./NM resulted from the descent gradient being calculated from descending from the restriction of AOB 9000 at OLBAY to cross CRABZ AOB 6000 and AOA 5000 (6000 B 5000) over 10.99 NM. The restriction after CRABZ is at FINNZ, a restriction of AT 5000. The distance required to descend from OLBAY at 9000 to FINNZ at 5000 is 16.68 NM. Calculating a descent gradient from OLBAY to FINNZ resulted in a descent gradient of 239.80 ft./NM.

LE	10-12-12 [IFPA r0 10-15-15 TO UNK]	FLY_BY	0.0		11000.0	520.0	0.0	62.4	303.12	308.82	1.18	15.81	8141.33	520.0	8.0	28.41	583.01	348.24
TF	CRABZ [IFPA r1 10-15-15 TO UNK]	FLY_BY	1.78	12.67	8747.33	250.0	8.0	56.47	293.07	349.54	1.57	4.42	6000.0	250.0	19.55	47.3	280.77	328.08
TF	FINNZ [IFPA r0 10-15-15 TO UNK]	FLY_BY	1.57	4.42	6000.0	250.0	19.55	47.3	280.77	328.08	1.12	7.87	5000.0	210.0	8.09	44.8	232.25	277.05

Consideration was given to removing and or changing the restrictions at OLBAY, CRABZ and FINNZ. However, due to airspace constraints and traffic flows it was decided that the restrictions are necessary to prevent aircraft from entering adjacent airspace, prevent conflict from other traffic and procedures, and reduce ATC workload due to required coordination, (point outs).


ANTHM THREE ARRIVAL (RNAV) Transition Routes

BALTIMORE, MARYLAND

NE-3, 28 DEC 2023 to 25 JAN 2024

POTOMAC APP CON
133.85 254.25
BWI D-ATIS
115.1 127.8

- NOTE: RADAR required
- NOTE: RNAV 1.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: Turbojet aircraft only.
- NOTE: Prohibited area (P56) 1.5 NM north of DCA avoid surface to 18000 MSL.
- NOTE: ARTCC will issue landing direction assignment (east or west). Potomac TRACON will issue runway assignments.

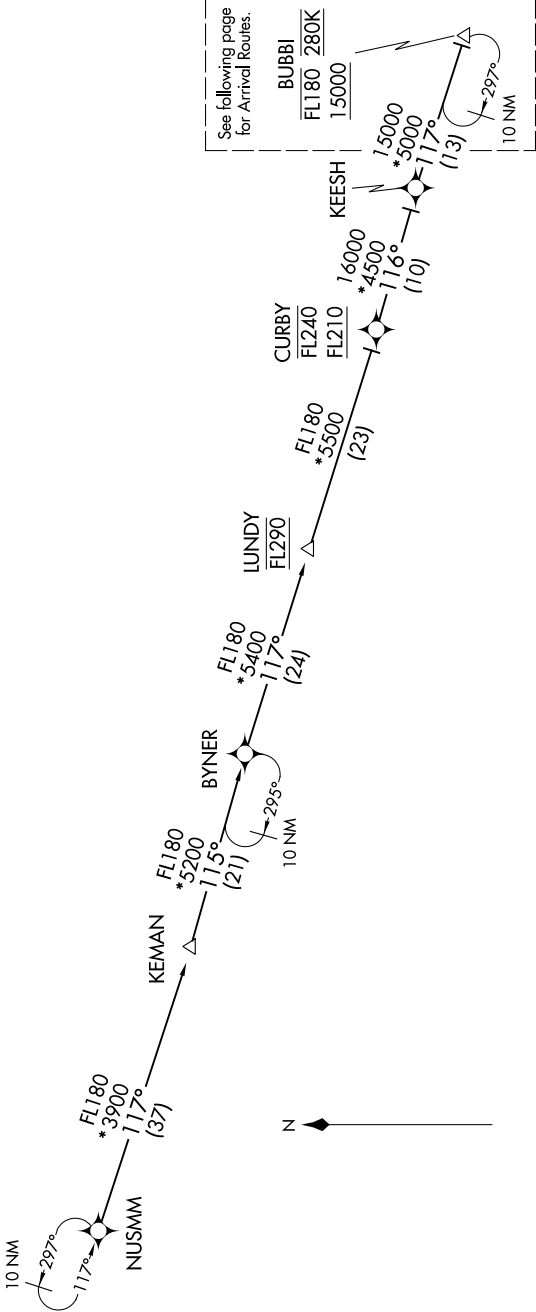

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGES)

NE-3, 28 DEC 2023 to 25 JAN 2024


KEESH TRANSITION (KEESH.ANTHM3)
KEMAN TRANSITION (KEMAN.ANTHM3)
NUSMM TRANSITION (NUSMM.ANTHM3)

ANTHM THREE ARRIVAL (RNAV) Transition Routes

BALTIMORE, MARYLAND

ANTHM THREE ARRIVAL (RNAV) Arrival Routes

BALTIMORE, MARYLAND

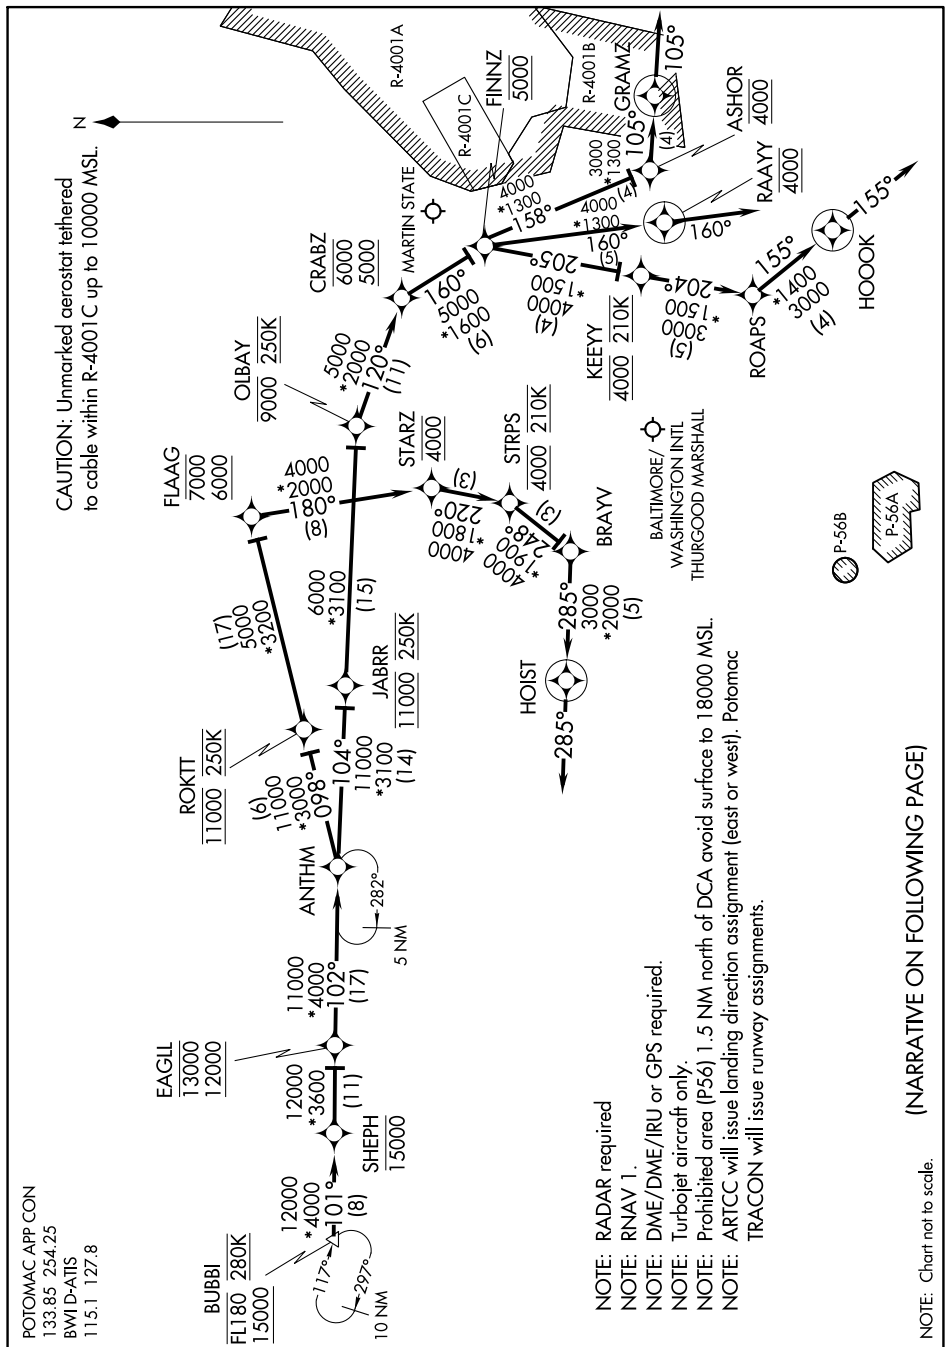

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

NE-3, 28 DEC 2023 to 25 JAN 2024

ANTHM THREE ARRIVAL (RNAV) Arrival Routes

BALTIMORE, MARYLAND

ARRIVAL ROUTE DESCRIPTION

Landing BWI:

From BUBBI on track 101° to cross SHEPH at or below 15000, then on track 101° to cross EAGLL between 12000 and 13000, then on track 102° to cross ANTHM.

LANDING EAST: RWYS 10 and 15L/R: From ANTHM on track 098° to cross ROKTT at 11000 and at 250K, then on track 098° to cross FLAAG between 6000 and 7000, then on track 180° to cross STARZ at 4000, then on track 220° to cross STRPS at 4000 and at 210K, then on track 248° to BRAYV, then on track 285° to HOIST, then on heading 285° or as assigned by ATC.
Expect RADAR vectors to final approach course.


LANDING WEST: RWY 28: From ANTHM on track 104° to cross JABRR at 11000 and at 250K, then on track 104° to cross OLBAY at or below 9000 and at 250K, then on track 120° to cross CRABZ between 5000 and 6000, then on track 160° to cross FINNZ at 5000, then on track 158° to cross ASHOR at 4000, then on track 105° to GRAMZ, then on heading 105°.
Expect RADAR vectors to final approach course.

LANDING WEST: RWYS 33L/R: From ANTHM on track 104° to cross JABRR at 11000 and at 250K, then on track 104° to cross OLBAY at or below 9000 and at 250K, then on track 120° to cross CRABZ between 5000 and 6000, then on track 160° to cross FINNZ at 5000, then on track 205° to cross KEEYY at 4000 and at 210K, then on track 204° to ROAPS, then on track 155° to HOOOK, then on heading 155°.
Expect RADAR vectors to final approach course.

LANDING MTN: From BUBBI on track 101° to cross SHEPH at or below 15000, then on track 101° to cross EAGLL between 12000 and 13000, then on track 102° to ANTHM, then on track 104° to cross JABRR at 11000 and at 250K, then on track 104° to cross OLBAY at or below 9000 and at 250K, then on track 120° to cross CRABZ between 5000 and 6000, then on track 160° to cross FINNZ at 5000, then on track 160° to cross RAAYY at 4000, then on heading 160°.
Expect RADAR vectors to final approach course.

ANTHM FOUR ARRIVAL (RNAV) Arrival Routes

BALTIMORE, MARYLAND

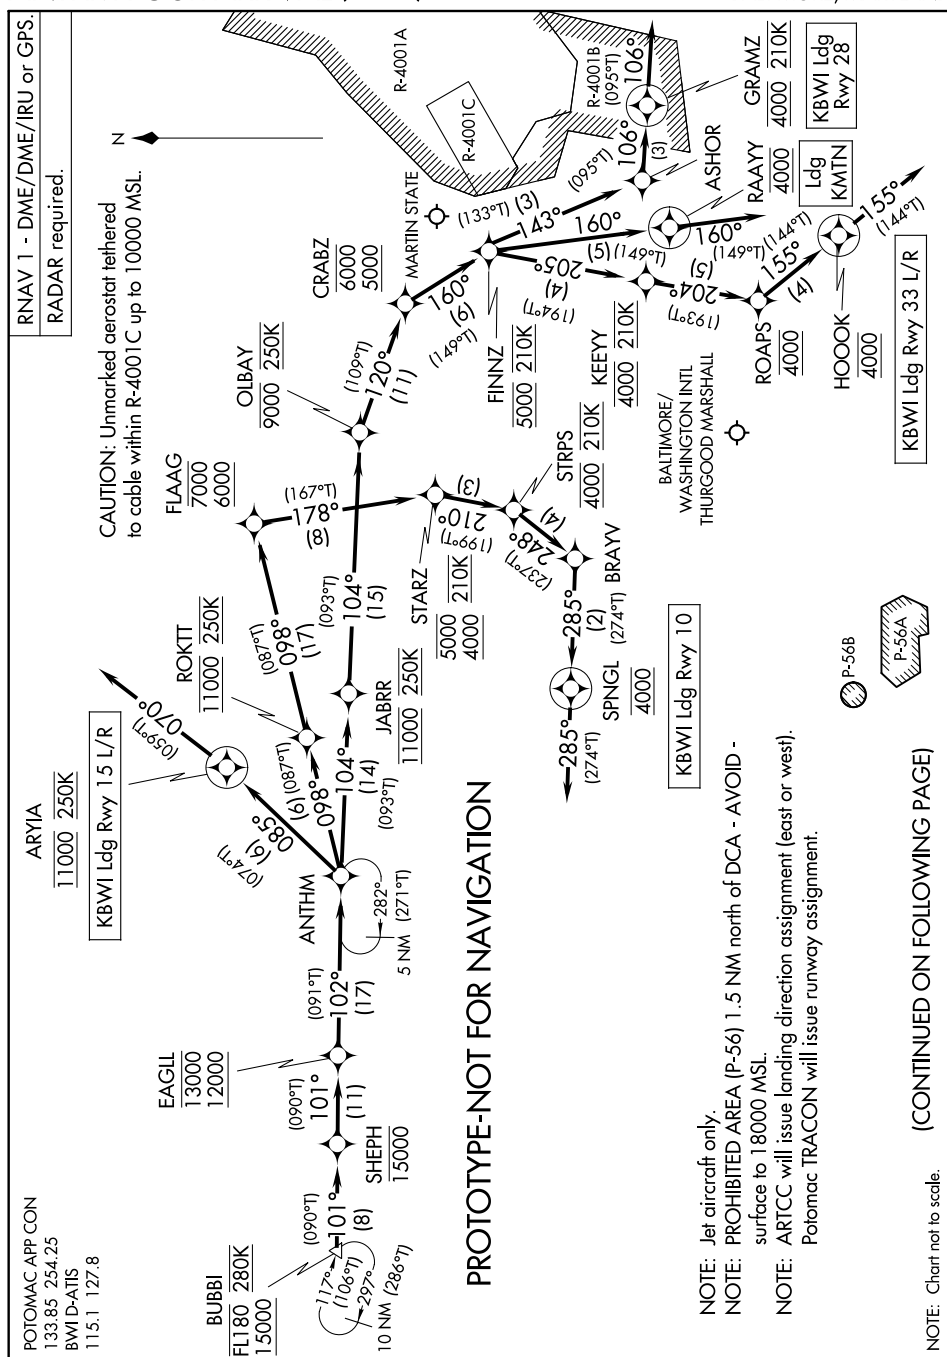

ANTHM FOUR ARRIVAL (RNAV) Arrival Routes

(BUBBI.ANTHM4) FIG

Baltimore, Maryland

ARRIVAL ROUTE DESCRIPTION

Landing KBWI:

From BUBBI on track 101° to cross SHEPH at or below 15000, then on track 101° to cross EAGLL between 12000 and 13000, then on track 102° to cross ANTHM.

LANDING KBWI RWY 10: From ANTHM on track 098° to cross ROKTT at 11000 and at 250K, then on track 098° to cross FLAAG between 6000 and 7000, then on track 178° to cross STARZ between 4000 and 5000 and at 210K, then on track 210° to cross STRPS at 4000 and at 210K, then on track 248° to BRAYV, then on track 285° to cross SPNGL at 4000, then on heading 285° or as assigned by ATC.
Expect RADAR vectors to final approach course.


LANDING KBWI RWYS 15L/R: From ANTHM on track 085° to cross ARYIA at 11000 and at 250K, then on heading 070° or as assigned by ATC.
Expect RADAR vectors to final approach course.

LANDING KBWI RWY 28: From ANTHM on track 104° to cross JABRR at 11000 and at 250K, then on track 104° to cross OLBAY at or below 9000 and at 250K, then on track 120° to cross CRABZ between 5000 and 6000, then on track 160° to cross FINNZ at 5000 and at 210K, then on track 143° to ASHOR, then on track 106° to cross GRAMZ at 4000 and at 210K, then on track 106°.
Expect RADAR vectors to final approach course.

LANDING KBWI RWYS 33L/R: From ANTHM on track 104° to cross JABRR at 11000 and at 250K, then on track 104° to cross OLBAY at or below 9000 and at 250K, then on track 120° to cross CRABZ between 5000 and 6000, then on track 160° to cross FINNZ at 5000 and at 210K, then on track 205° to cross KEEYY at 4000 and at 210K, then on track 204° to cross ROAPS at 4000, then on track 155° to cross HOOOK at 4000, then on track 155°.
Expect RADAR vectors to final approach course.


LANDING KMTN: From BUBBI on track 101° to cross SHEPH at or below 15000, then on track 101° to cross EAGLL between 12000 and 13000, then on track 102° to ANTHM, then on track 104° to cross JABRR at 11000 and at 250K, then on track 104° to cross OLBAY at or below 9000 and at 250K, then on track 120° to cross CRABZ between 5000 and 6000, then on track 160° to cross FINNZ at 5000 and at 210K, then on track 160° to cross RAAYY at 4000, then on track 160°.
Expect RADAR vectors to final approach course.

PROTOTYPE-NOT FOR NAVIGATION

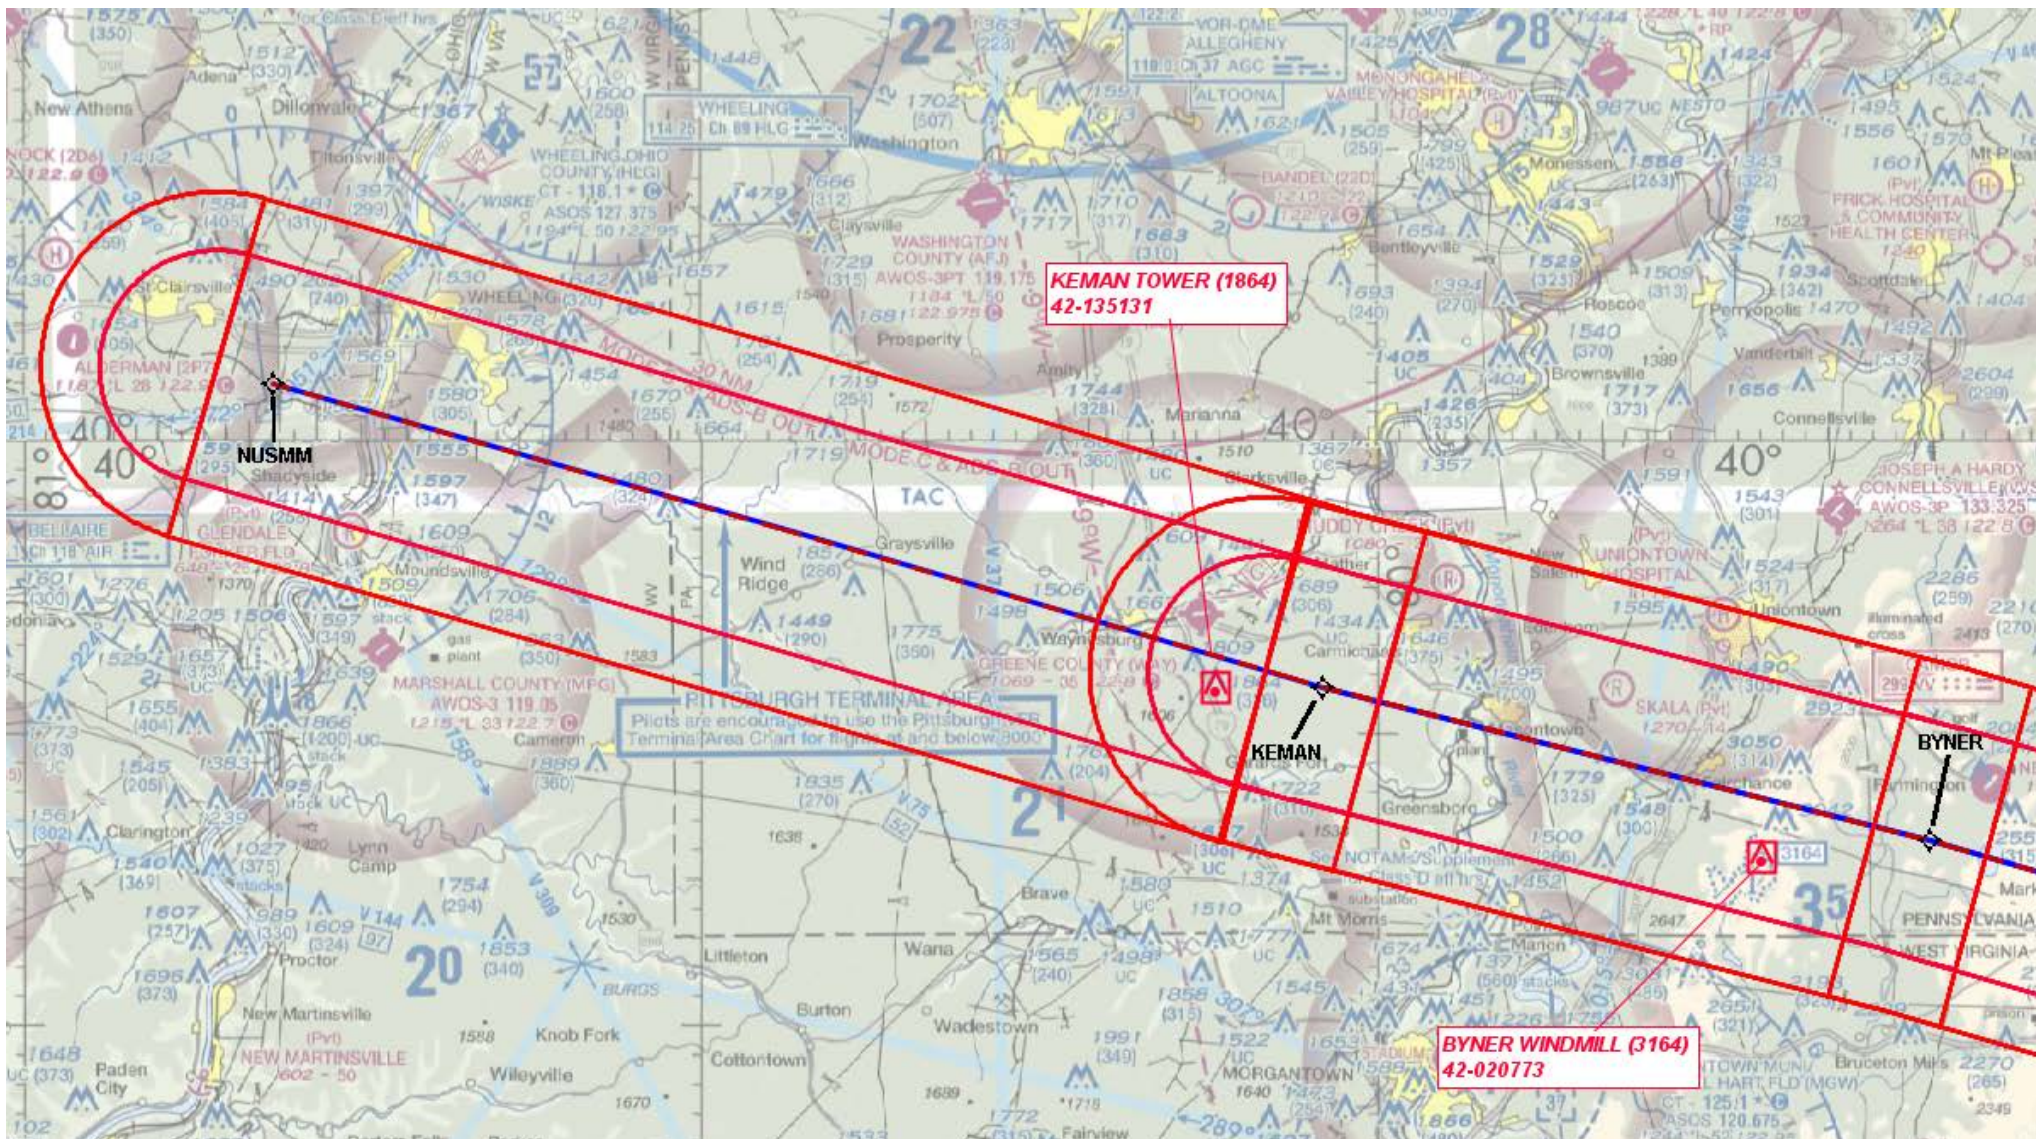


KBWI - Baltimore/Washington International Thurgood Marshall Airport
BALTIMORE, MD
ANTHM FOUR ARRIVAL (RNAV)
SCALE 1:500,000
PAGE 1 OF 4

ANTHM (RNAV)

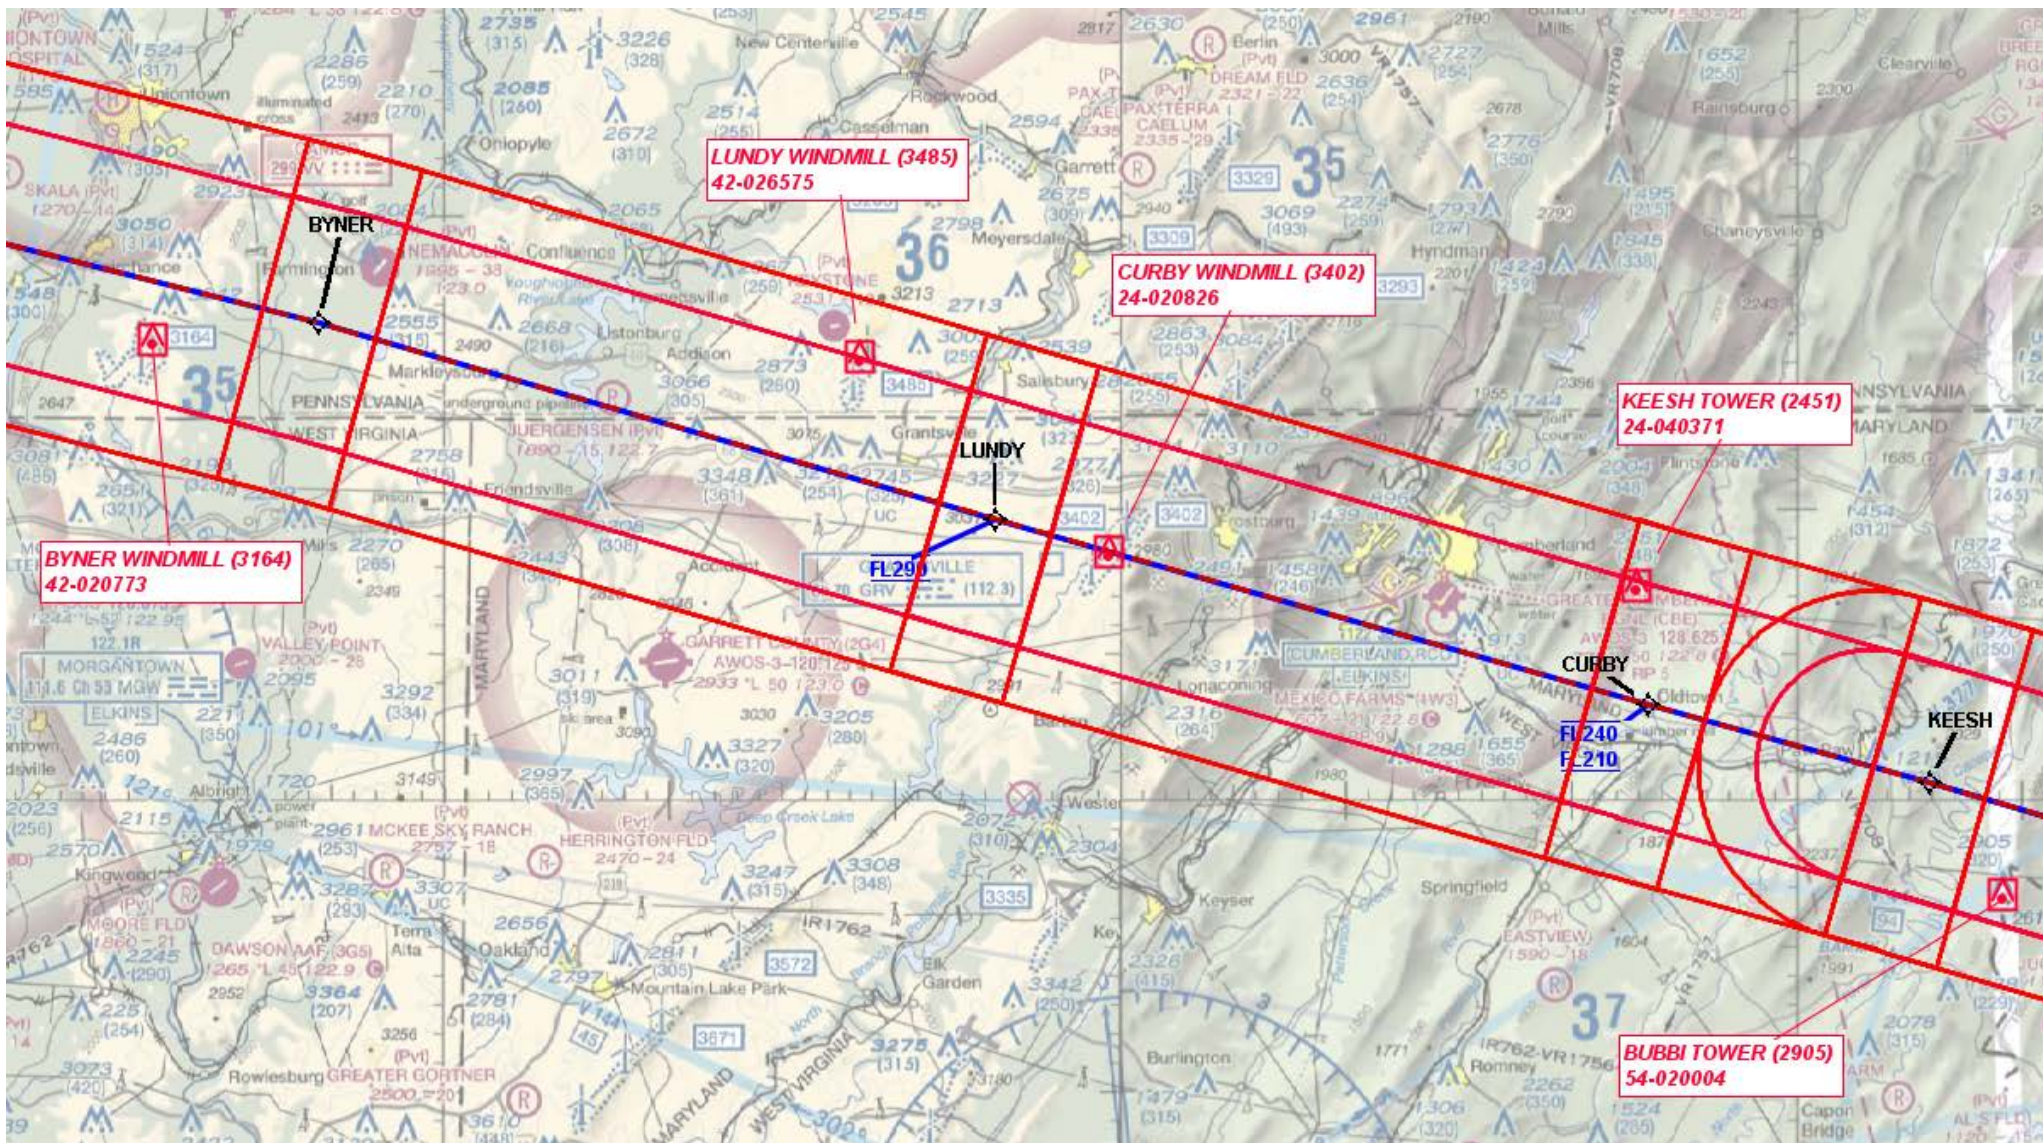


KBWI - Baltimore/Washington International Thurgood Marshall Airport
BALTIMORE, MD
ANTHM FOUR ARRIVAL (RNAV)
SCALE 1:500,000
PAGE 2 OF 4

ANTHM (RNAV)

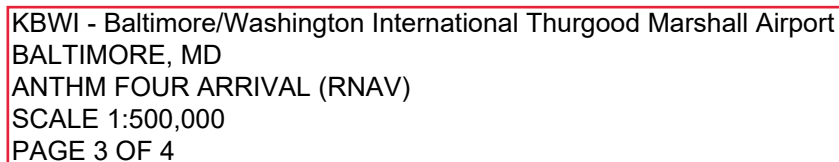

Page 8 of 74

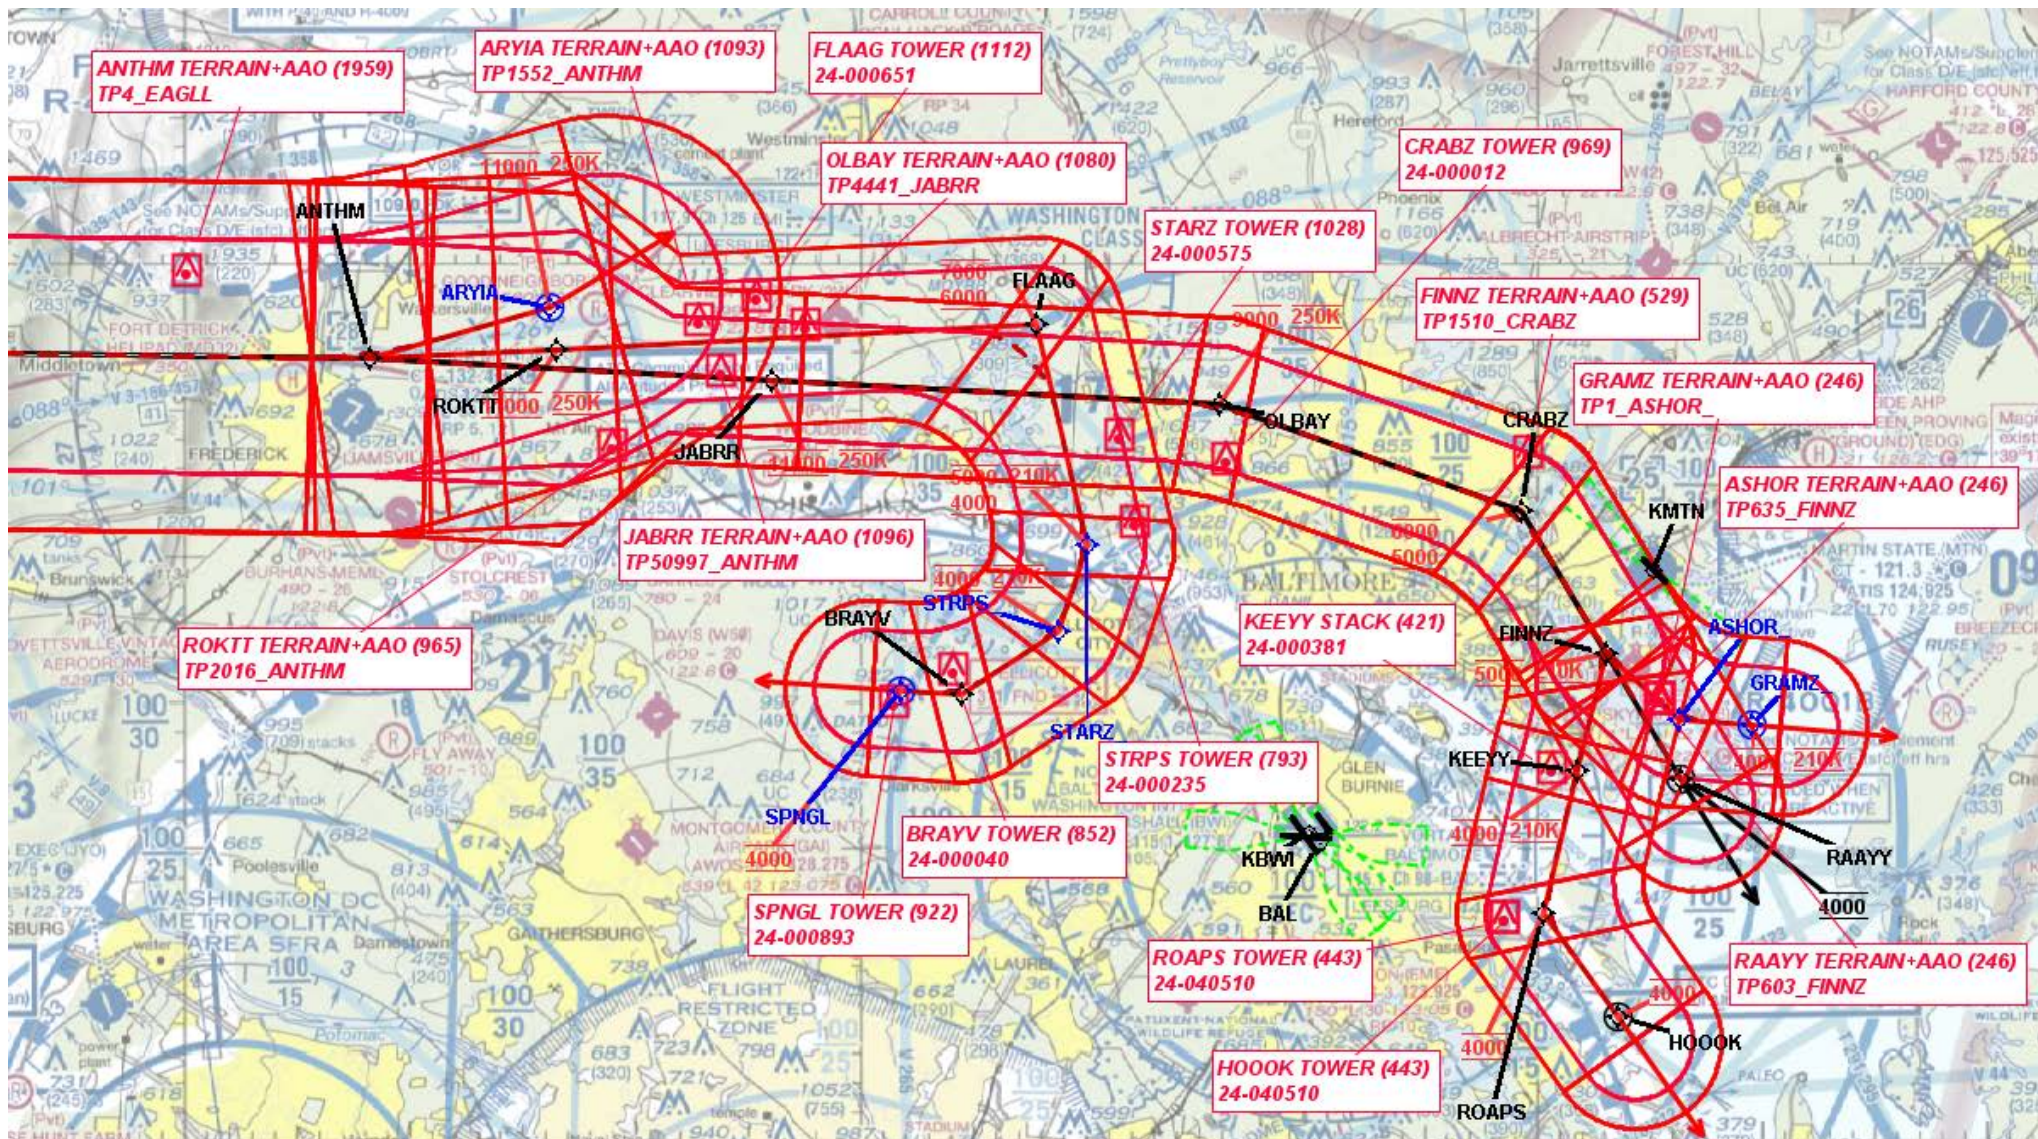

KBWI - Baltimore/Washington International Thurgood Marshall Airport
BALTIMORE, MD
ANTHM FOUR ARRIVAL (RNAV)
SCALE 1:500,000
PAGE 4 OF 4

ANTHM (RNAV)