

LOC/DME I-CLE 111.9 Chan 56	APP CRS 058°	Rwy Ldg 6R 8029 6L 9000	TDZE 777 773	Apt Elev 800 800
--	------------------------	-------------------------------	--------------------	------------------------

ILS or LOC RWY 6R



CLEVELAND-HOPKINS INTL (CLE)

RNAV 1. From GROHL, HICKR, and RUHSH: RNAV 1-DME/DME/IRU or GPS required for procedure entry. Aircraft not DME/DME/IRU or GPS equipped - RADAR required for procedure entry.
DME required.



Rwy 6L ALSF-2	Rwy 6R MALSR	MISSED APPROACH: Climb to 3000 direct MOMBE and on track 099° to NEILL and hold.
------------------	-----------------	---

▼ Circling Rwy 10 NA at night. Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glideslope. Inop table does not apply to Sidestep 6L. For inop ALS, increase S-LOC 6R Cats C/D visibility to 1 1/2 SM.

D-ATIS 127.85	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45
-------------------------	--	--	--------------------------------

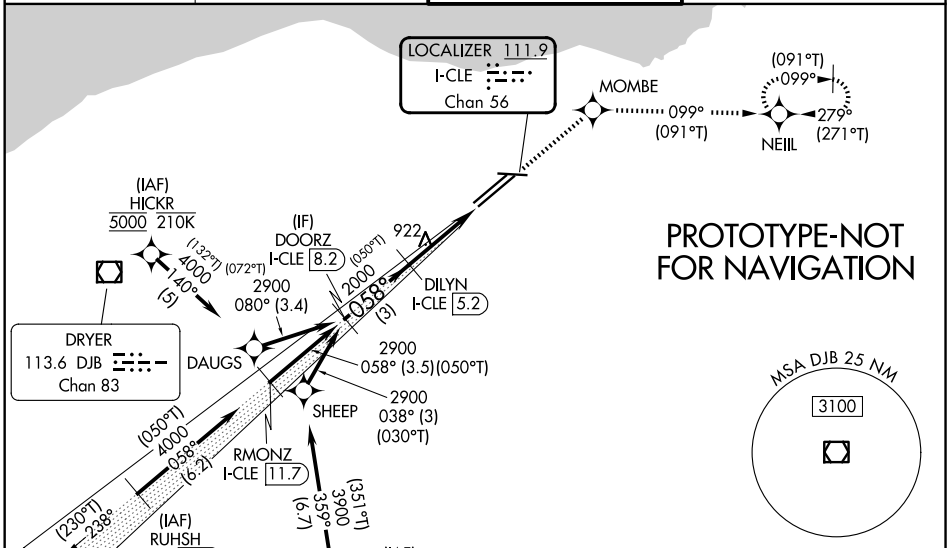

ELEV 800	TDZE 6R 777	TDZE 6L 773
----------	-------------	-------------

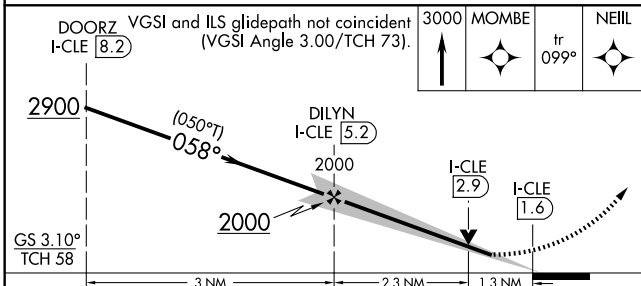

CATEGORY	A	B	C	D
S-ILS 6R	977/18		200 (200-1/2)	
S-LOC 6R	1260/24	483 (500-1/2)	1260/50	483 (500-1)
SIDESTEP 6L	1260-1 1/2		487 (500-1 1/2)	
CIRCLING	1420-1 620 (700-1)		1420-1 3/4	620 (700-1 3/4)
			1420-2	620 (700-2)

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L and 24R
HIRL Rwy 6L-24R, 6R-24L and 10-28

LOC/DME I-CLE 111.9 Chan 56	APP CRS 058°	Rwy Ldg 8029 TDZE 777 Apt Elev 800
---	------------------------	---

ILS RWY 6R (SA CAT II)
CLEVELAND-HOPKINS INTL (CLE)


RNAV 1. From GROHL, HICKR, and RUHSH: RNAV 1-DME/DME/IRU or GPS required for procedure entry. Aircraft not DME/DME/IRU or GPS equipped - RADAR required for procedure entry.
DME required.

▼ Simultaneous approach authorized. Simultaneous operations require use of vertical guidance; maintain last assigned altitude until established on glideslope. Circling Rwy 10 NA at night. Requires specific OPSPEC, MSPEC, or LOA approval.



MALSRL

MISSED APPROACH:
Climb to 3000 direct MOMB and on track 099° to NEILL and hold.

D-ATIS 127.85	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45
-------------------------	--	--	--------------------------------

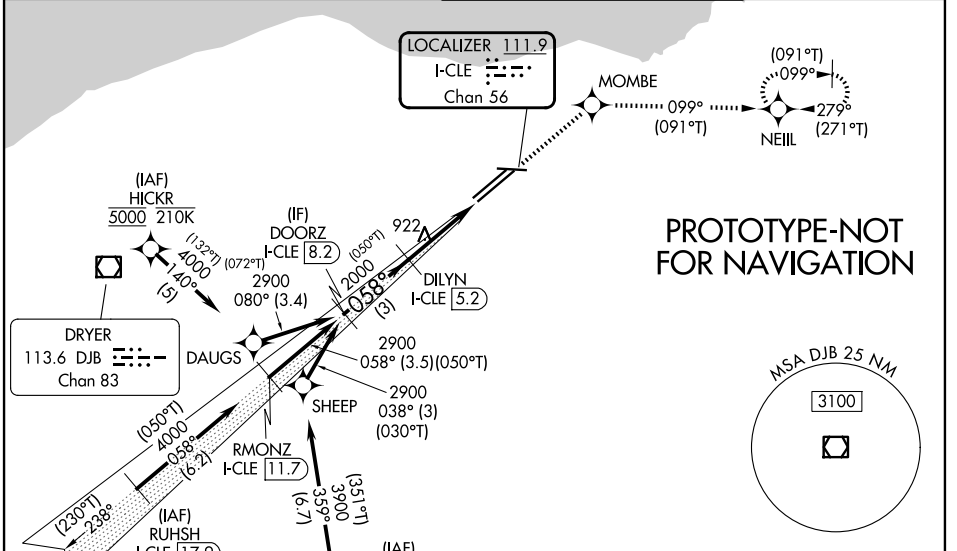

ELEV 800	D	TDZE 777
----------	----------	----------

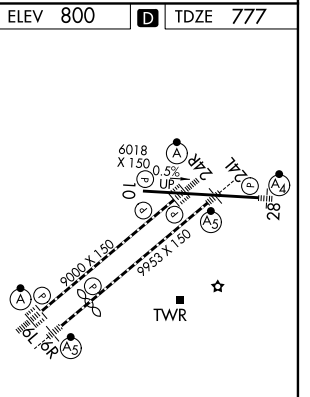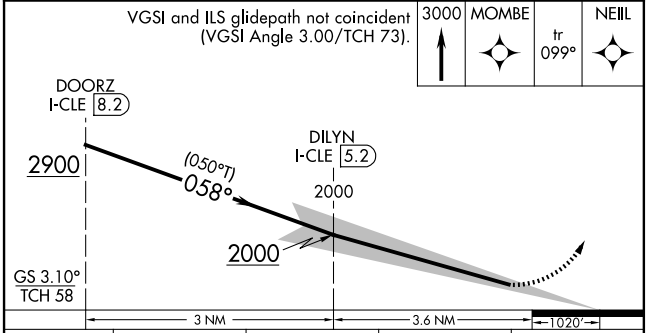

CATEGORY	A	B	C	D
S-ILS 6R	RA 100/12 100 DA 877			

SA CATEGORY II ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

REIL Rwy 10
TDZ/CL Rwy 6L, 6R, 24L and 24R
HIRL Rwy 6L-24R, 6R-24L and 10-28