


WAAS CH 69401 W17A	APP CRS 175°	Rwy Idg TDZE Apt Elev	6002 541 548
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17
COX FLD (PRX)

RNP APCH - GPS.	Baro-VNAV and VDP NA when using SLR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. When local altimeter setting not received, use SLR altimeter setting and increase LPV DA to 868 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1016 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.	MISSED APPROACH: Climb to 2200 direct CUKBO and hold.
-----------------	--	--

AWOS-3PT 119.675	FORT WORTH CENTER 124.875	UNICOM 122.975 (CTAF) 0
----------------------------	-------------------------------------	-----------------------------------

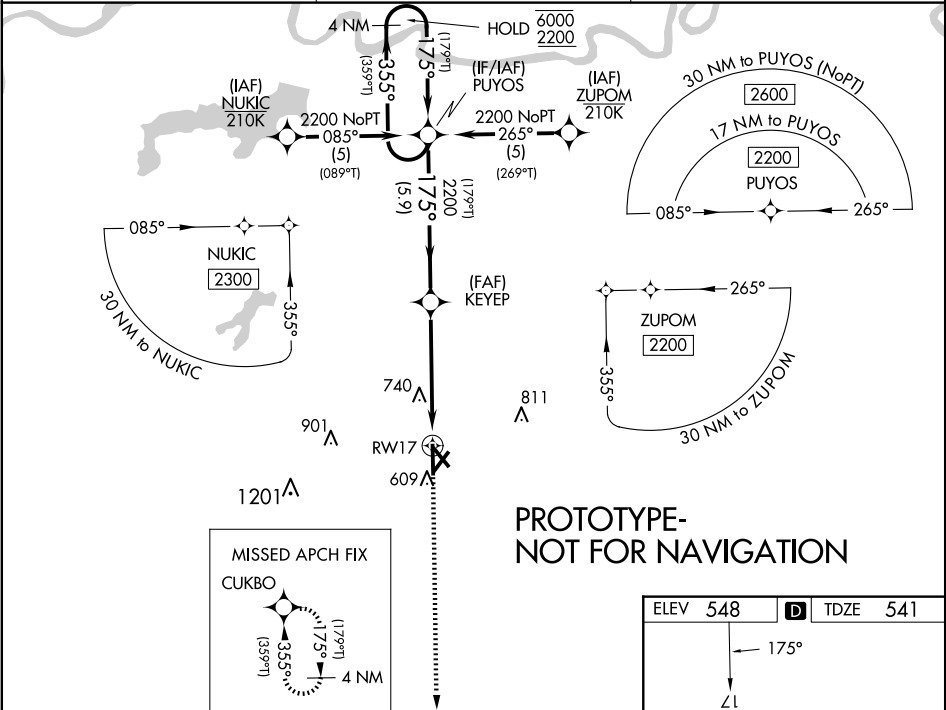

PROTOTYPE-
NOT FOR NAVIGATION

4 NM Holding Pattern 6000 2200 GP 3.00° TCH 40				PUYOS	KEYEP 2200	2200 ↑	CUKBO ✦
(359°T) 175° (179°T) 175° (179°T)				(179°T)	1.4 NM to RW17	RW17	
				5.9 NM	3.6 NM	1.4 NM	
CATEGORY	A		B	C		D	
LPV DA			791-¾	250 (300-¾)			
LNAV/VNAV DA			939-1½	398 (400-1½)			
LNAV MDA	1040-1	499 (500-1)	1040-1⅜		499 (500-1⅜)		
CIRCLING	1060-1	512 (600-1)	1100-1½ 552 (600-1½)		1220-2¼ 672 (700-2¼)		

