

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 06/12/2025	APWS Task ID: 58C7427556664478887A2BC6530FF630	APWS Project ID: 6F670F5413AE44DD9B2E8E4C692818CA
Procedure: RNAV (GPS) RWY 17 AMDT 1		Enroute: NO	Specialist: Hardison, Dustin		Agreement Number:
Airport ID: KPRX			Airport City: PARIS		State: TX
Facility ID:	Facility Type:	Flight Inspection Remark Type: New FC Slot			
Procedure Comments: DEVELOPED WITH ACTIVE DATA. CLEARS NOTAM FDC 3/7739. Contact Rake McGraw AJV-A422 (405)597-8711 QUALITY 9 CHECKED BEGUE QUALITY 19 CHECKED					

PARIS, TEXAS

AL-803 (FAA)

21140

WAAS CH 69401 W17A	APP CRS 175°	Rwy Idg TDZE 541 Apt Elev 548	6002
--	------------------------	---	-------------


OLD

RNAV (GPS) RWY 17
COX FLD (PRX)


⚠ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Sulphur Springs altimeter setting and increase LPV DA to 868 feet, LNAV/VNAV DA to 923 feet, and all MDAs 80 feet; increase Circling Cats C/D visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 47°C (118°F). Baro-VNAV NA when using Sulphur Springs altimeter setting.

MISSED APPROACH:
Climb to 2200 direct CUKBO and hold.

AWOS-3PT 119.675	FORT WORTH CENTER 124.875	UNICOM 122.975 (CTAF) 0
----------------------------	-------------------------------------	-----------------------------------

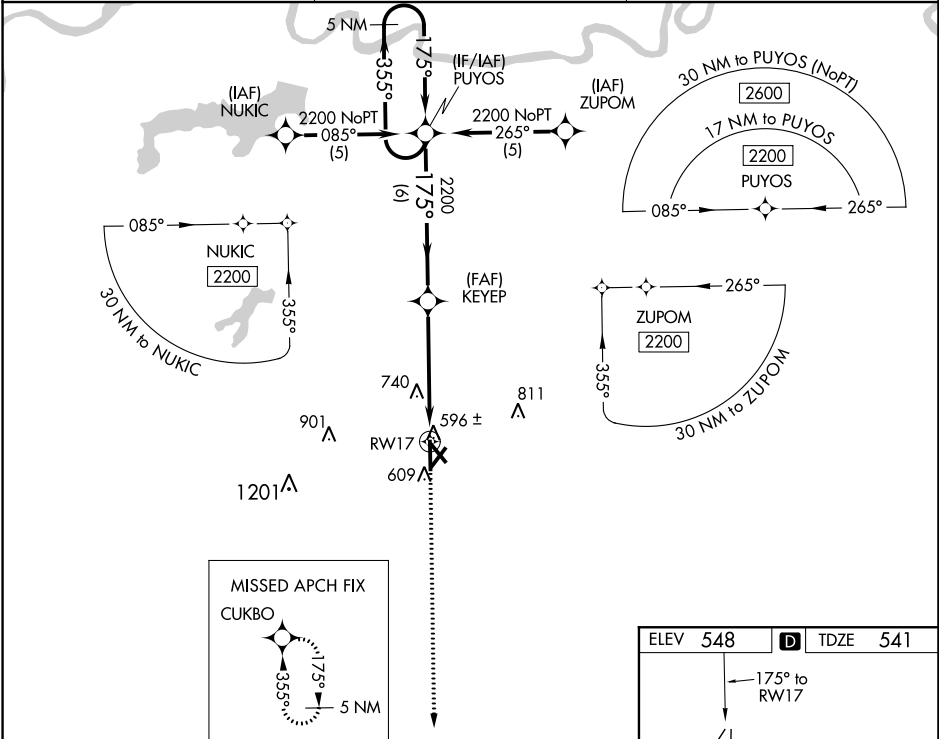

5 NM Holding Pattern				
PUYOS				
KEYEP				
RW17				
GP 3.00° TCH 40				
6 NM 5 NM				
CATEGORY	A	B	C	D
LPV DA	791-1		250 (300-1)	
LNAV/VNAV DA	846-1		305 (300-1)	
LNAV MDA	1040-1	499 (500-1)	1040-1¼ 499 (500-1¼)	1040-1½ 499 (500-1½)
CIRCLING	1040-1 492 (500-1)	1060-1 512 (600-1)	1100-1½ 552 (600-1½)	1220-2¼ 672 (700-2¼)

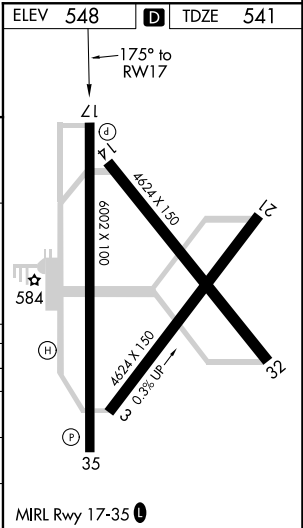

PARIS, TEXAS
Orig-A 20MAY21

33° 38' N-95° 27' W

COX FLD (PRX)
RNAV (GPS) RWY 17

SC-2, 31 OCT 2024 to 28 NOV 2024


SC-2, 31 OCT 2024 to 28 NOV 2024

WAAS CH 69401 W17A	APP CRS 175°	Rwy Idg TDZE Apt Elev	6002 541 548
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17
COX FLD (PRX)


RNP APCH - GPS.	Baro-VNAV and VDP NA when using SLR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. When local altimeter setting not received, use SLR altimeter setting and increase LPV DA to 868 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1016 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.	MISSED APPROACH: Climb to 2200 direct CUKBO and hold.
-----------------	--	--


AWOS-3PT 119.675	FORT WORTH CENTER 124.875	UNICOM 122.975 (CTAF) 0
----------------------------	-------------------------------------	-----------------------------------

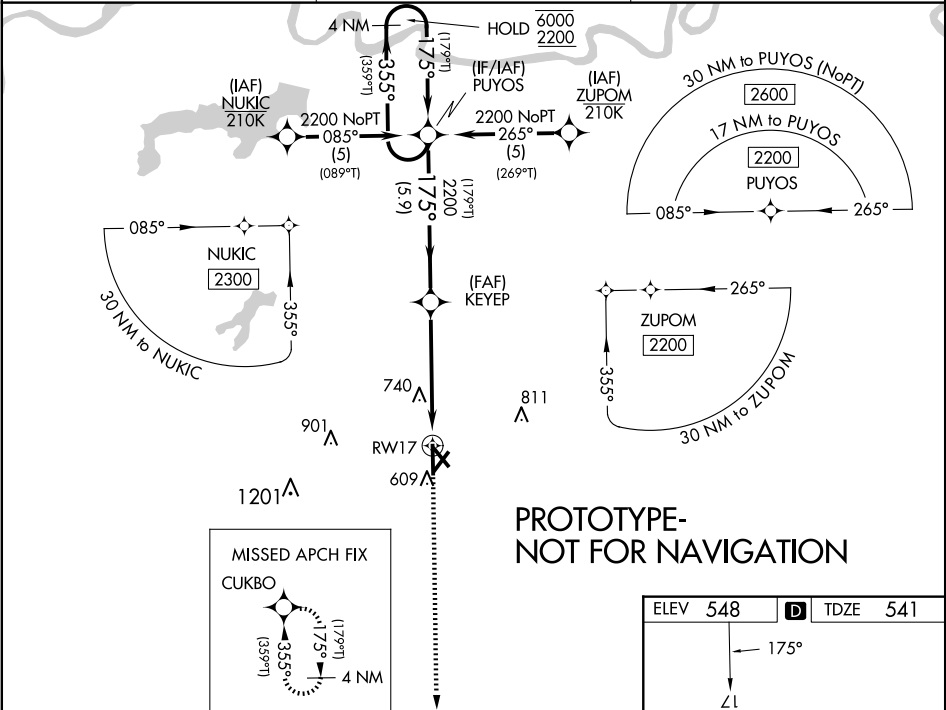

PROTOTYPE-
NOT FOR NAVIGATION

4 NM Holding Pattern 6000 2200 GP 3.00° TCH 40				PUYOS	KEYEP 2200	2200 ↑	CUKBO ✦
(359°T) 355° 175° (179°T)				(179°T) 175°	1.4 NM to RW17	RW17	
				5.9 NM	3.6 NM	1.4 NM	
CATEGORY	A		B	C		D	
LPV DA			791-¾	250 (300-¾)			
LNAV/VNAV DA			939-1½	398 (400-1½)			
LNAV MDA	1040-1	499 (500-1)	1040-1⅜		499 (500-1⅜)		
CIRCLING	1060-1	512 (600-1)	1100-1½ 552 (600-1½)		1220-2¼ 672 (700-2¼)		

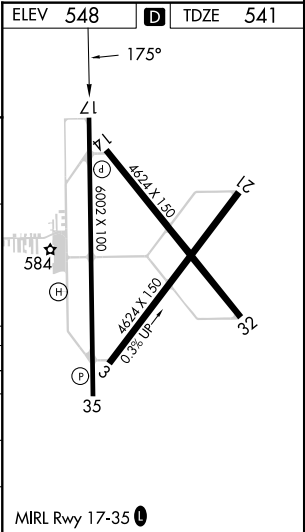

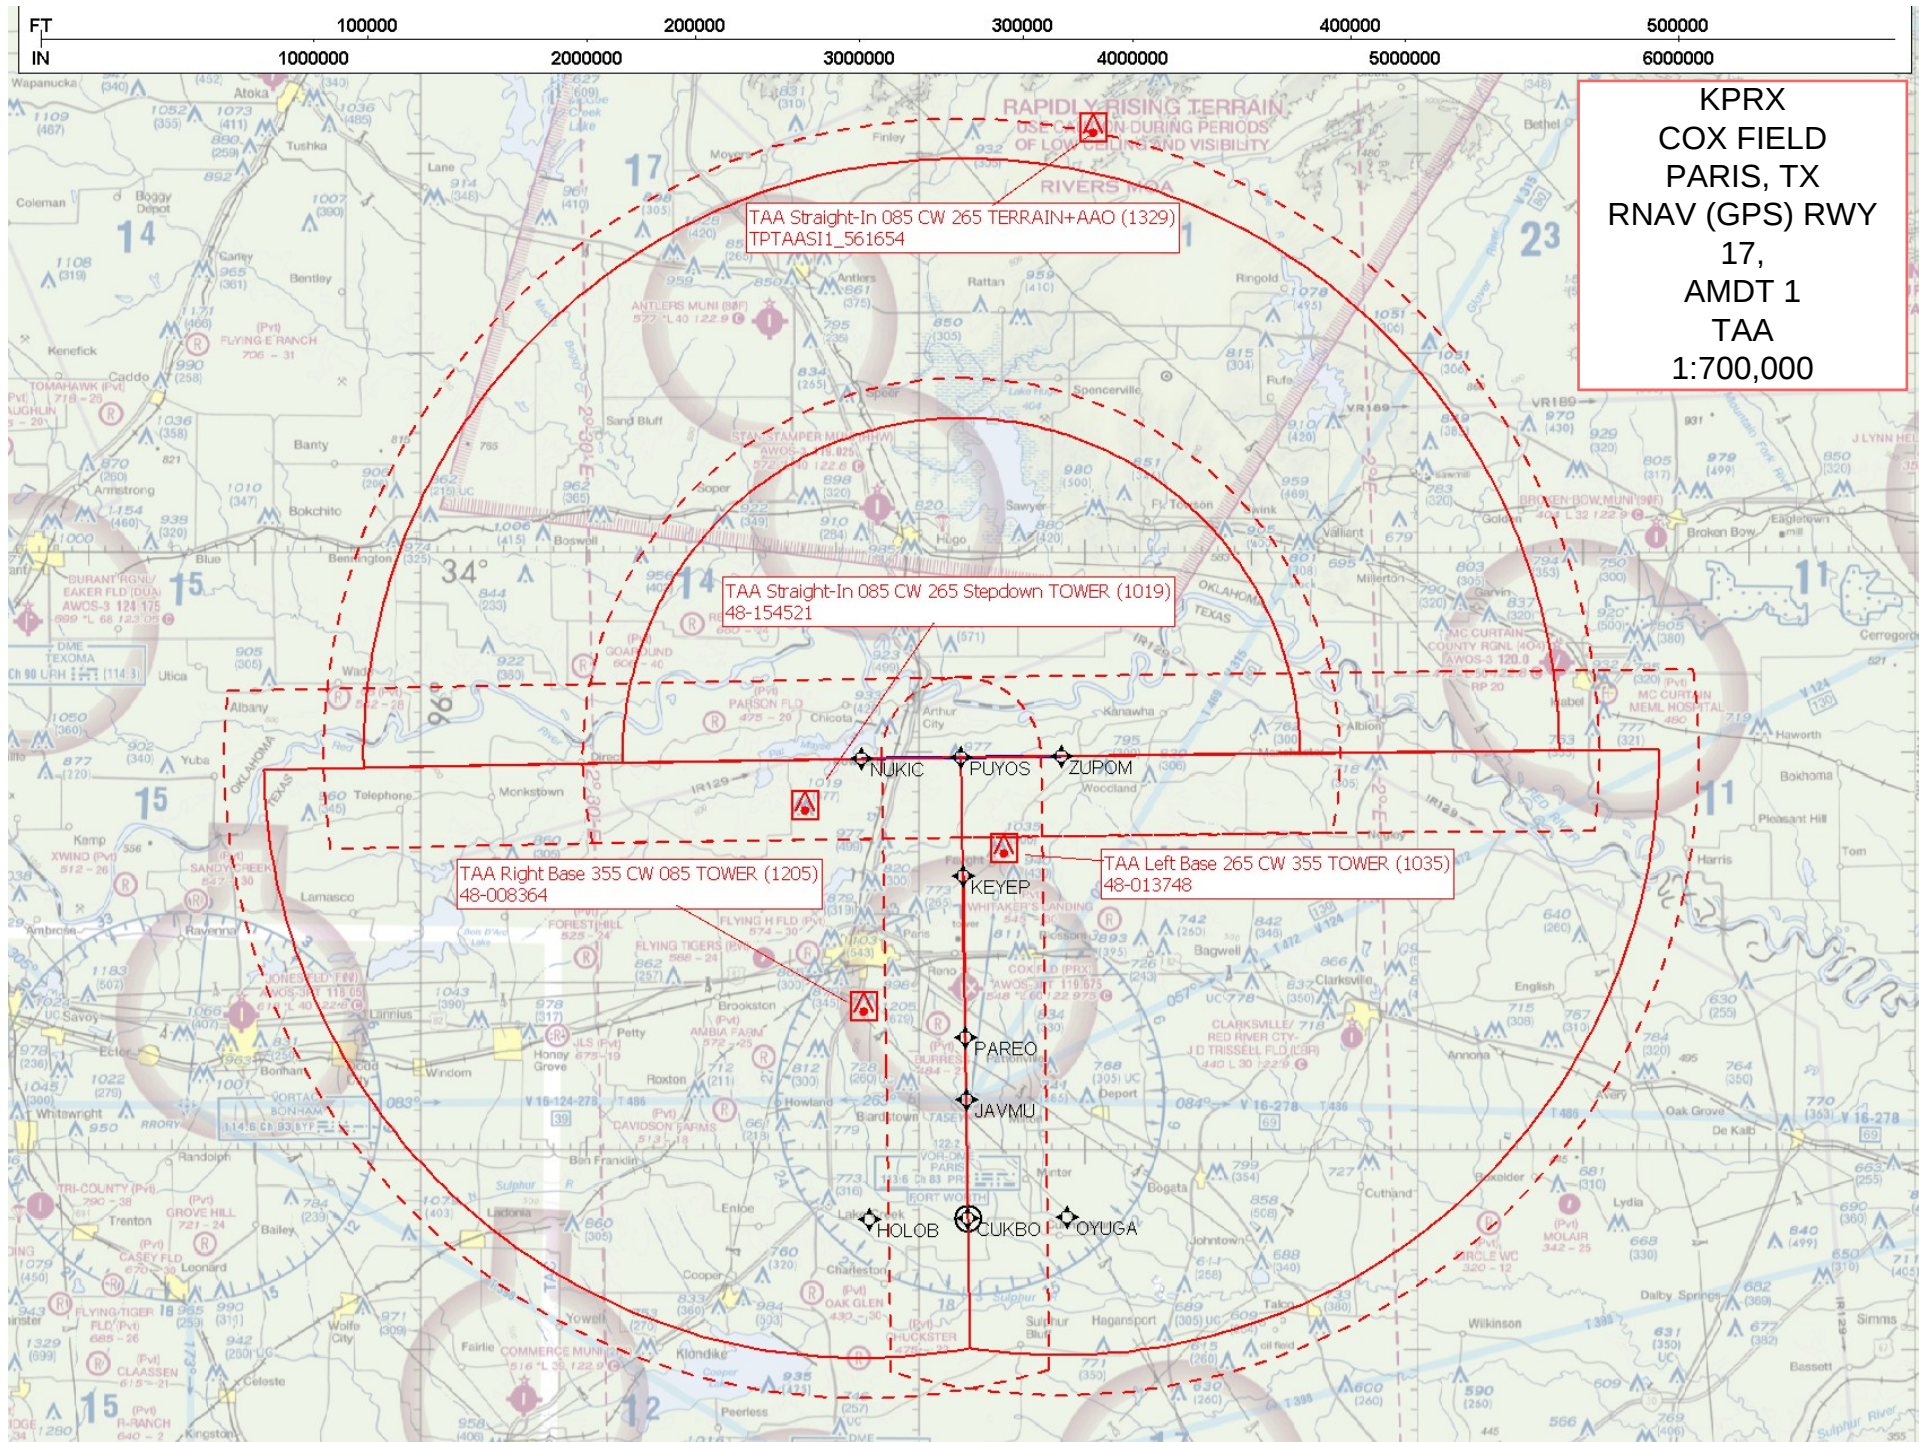

KPRX
COX FIELD
PARIS, TX
RNAV (GPS) RWY
17,
AMDT 1
TAA
1:700,000

TAA Straight-In 085 CW 265 TERRAIN+AAO (1329)
TPTAASI1_561654

TAA Straight-In 085 CW 265 Stepdown TOWER (1019)
48-154521

TAA Right Base 355 CW 085 TOWER (1205)
48-008364

TAA Left Base 265 CW 355 TOWER (1035)
48-013748



KPRX
COX FIELD
PARIS, TX
RNAV (GPS) RWY 17,
AMDT 1
1:500,000


Initial NUKIC to PUYOS/Initial ZUPOM to PUYOS/Intermediate PUYOS to KEYEP TOWER (977)
48-005912


PUYOS TOWER (991)
40-001048


RNAV KEYEP to KPRX:RWY17:AER TOWER (740)
48-154923


Missed Level Surface TERRAIN+AAO (709)
TPMA418

CUKBO-1 TERRAIN+AAO (712)
TP_T6P10556

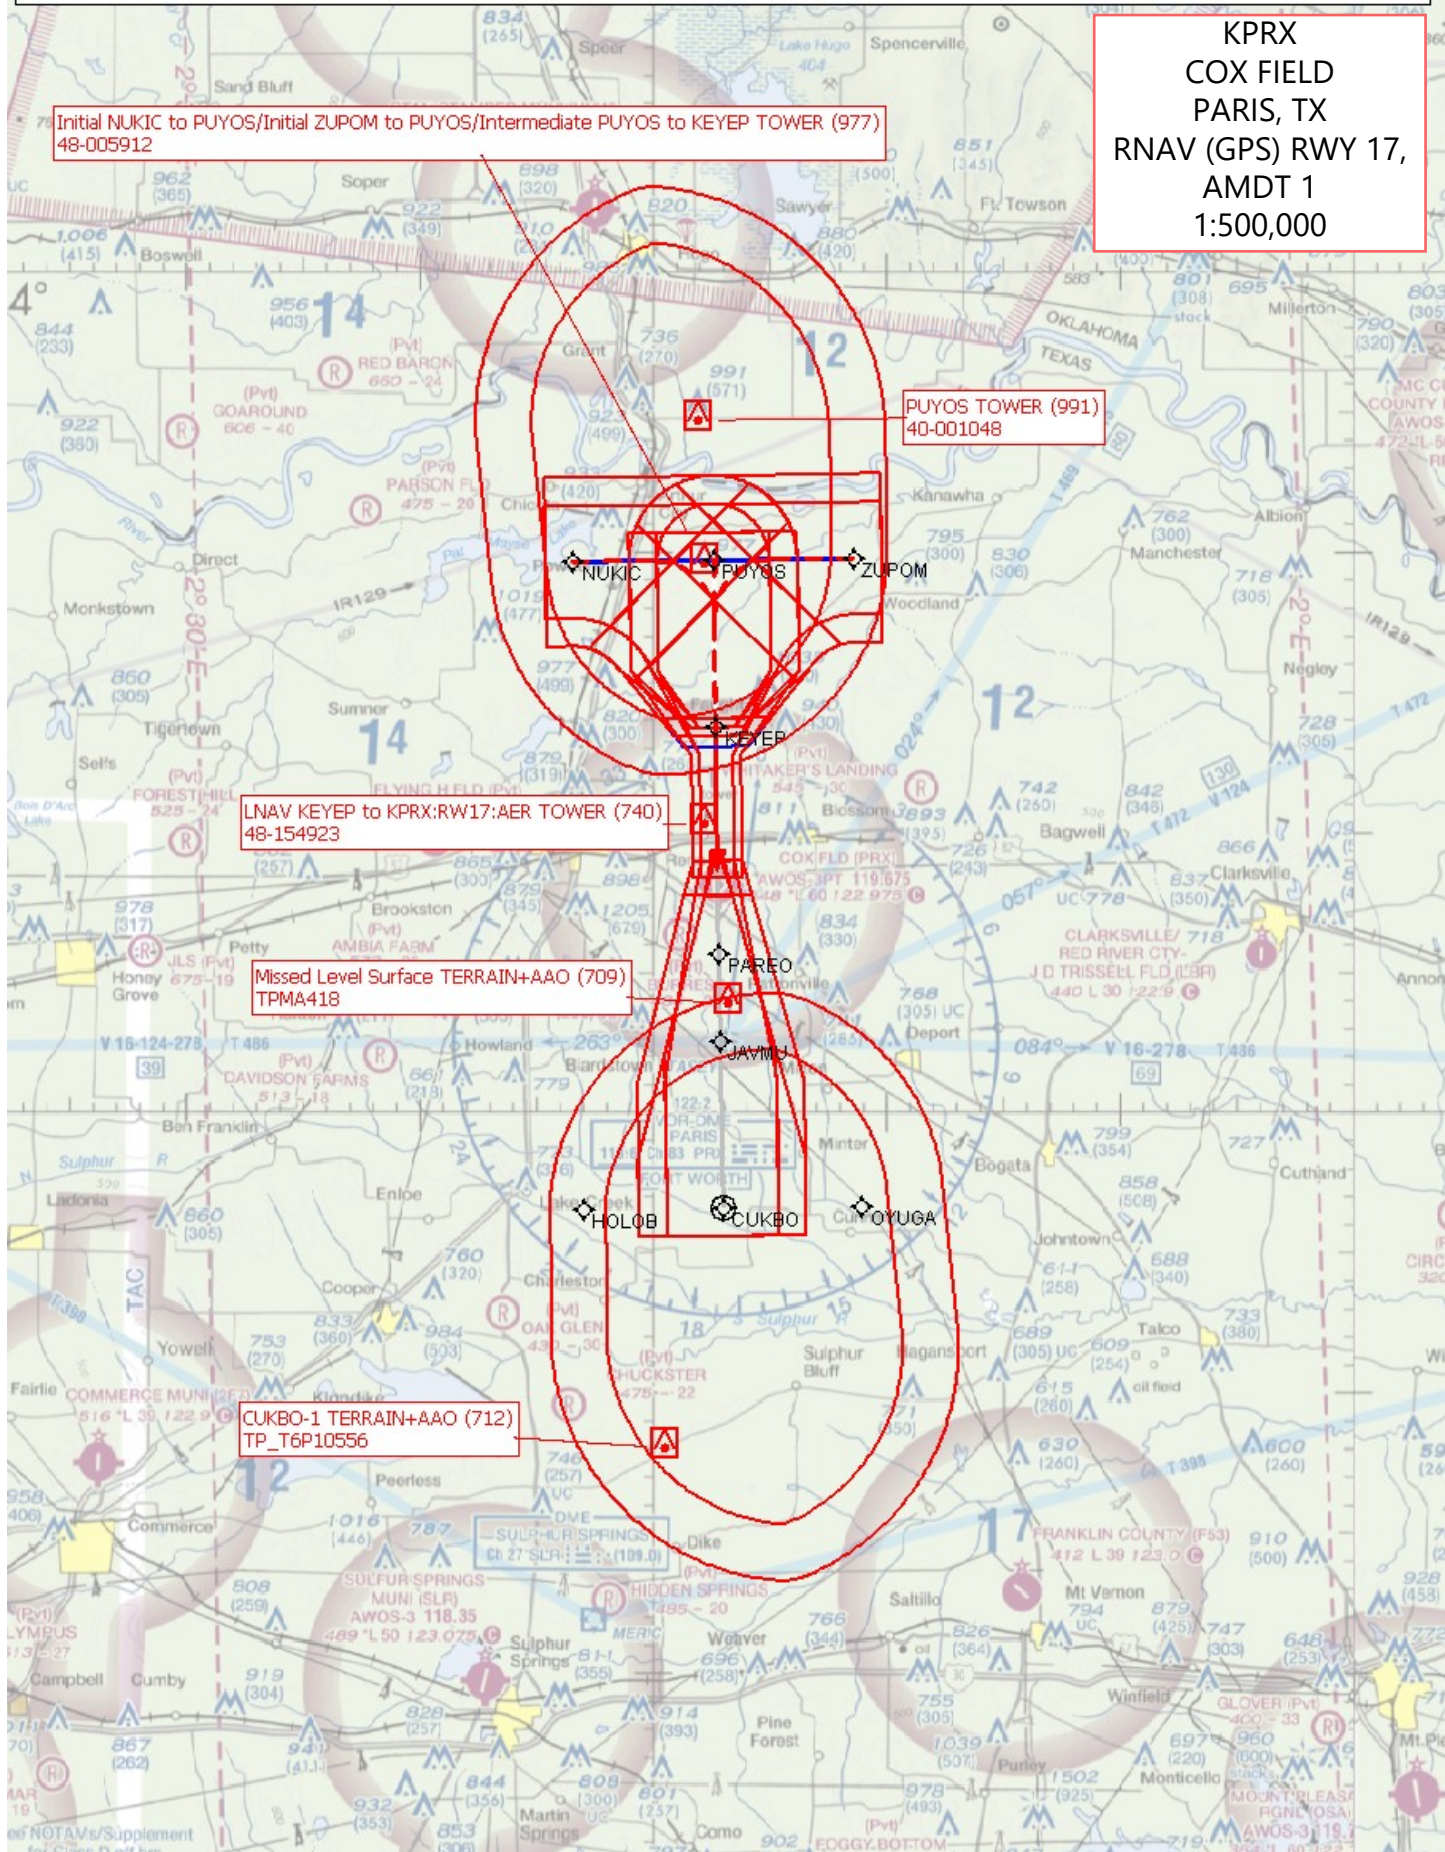

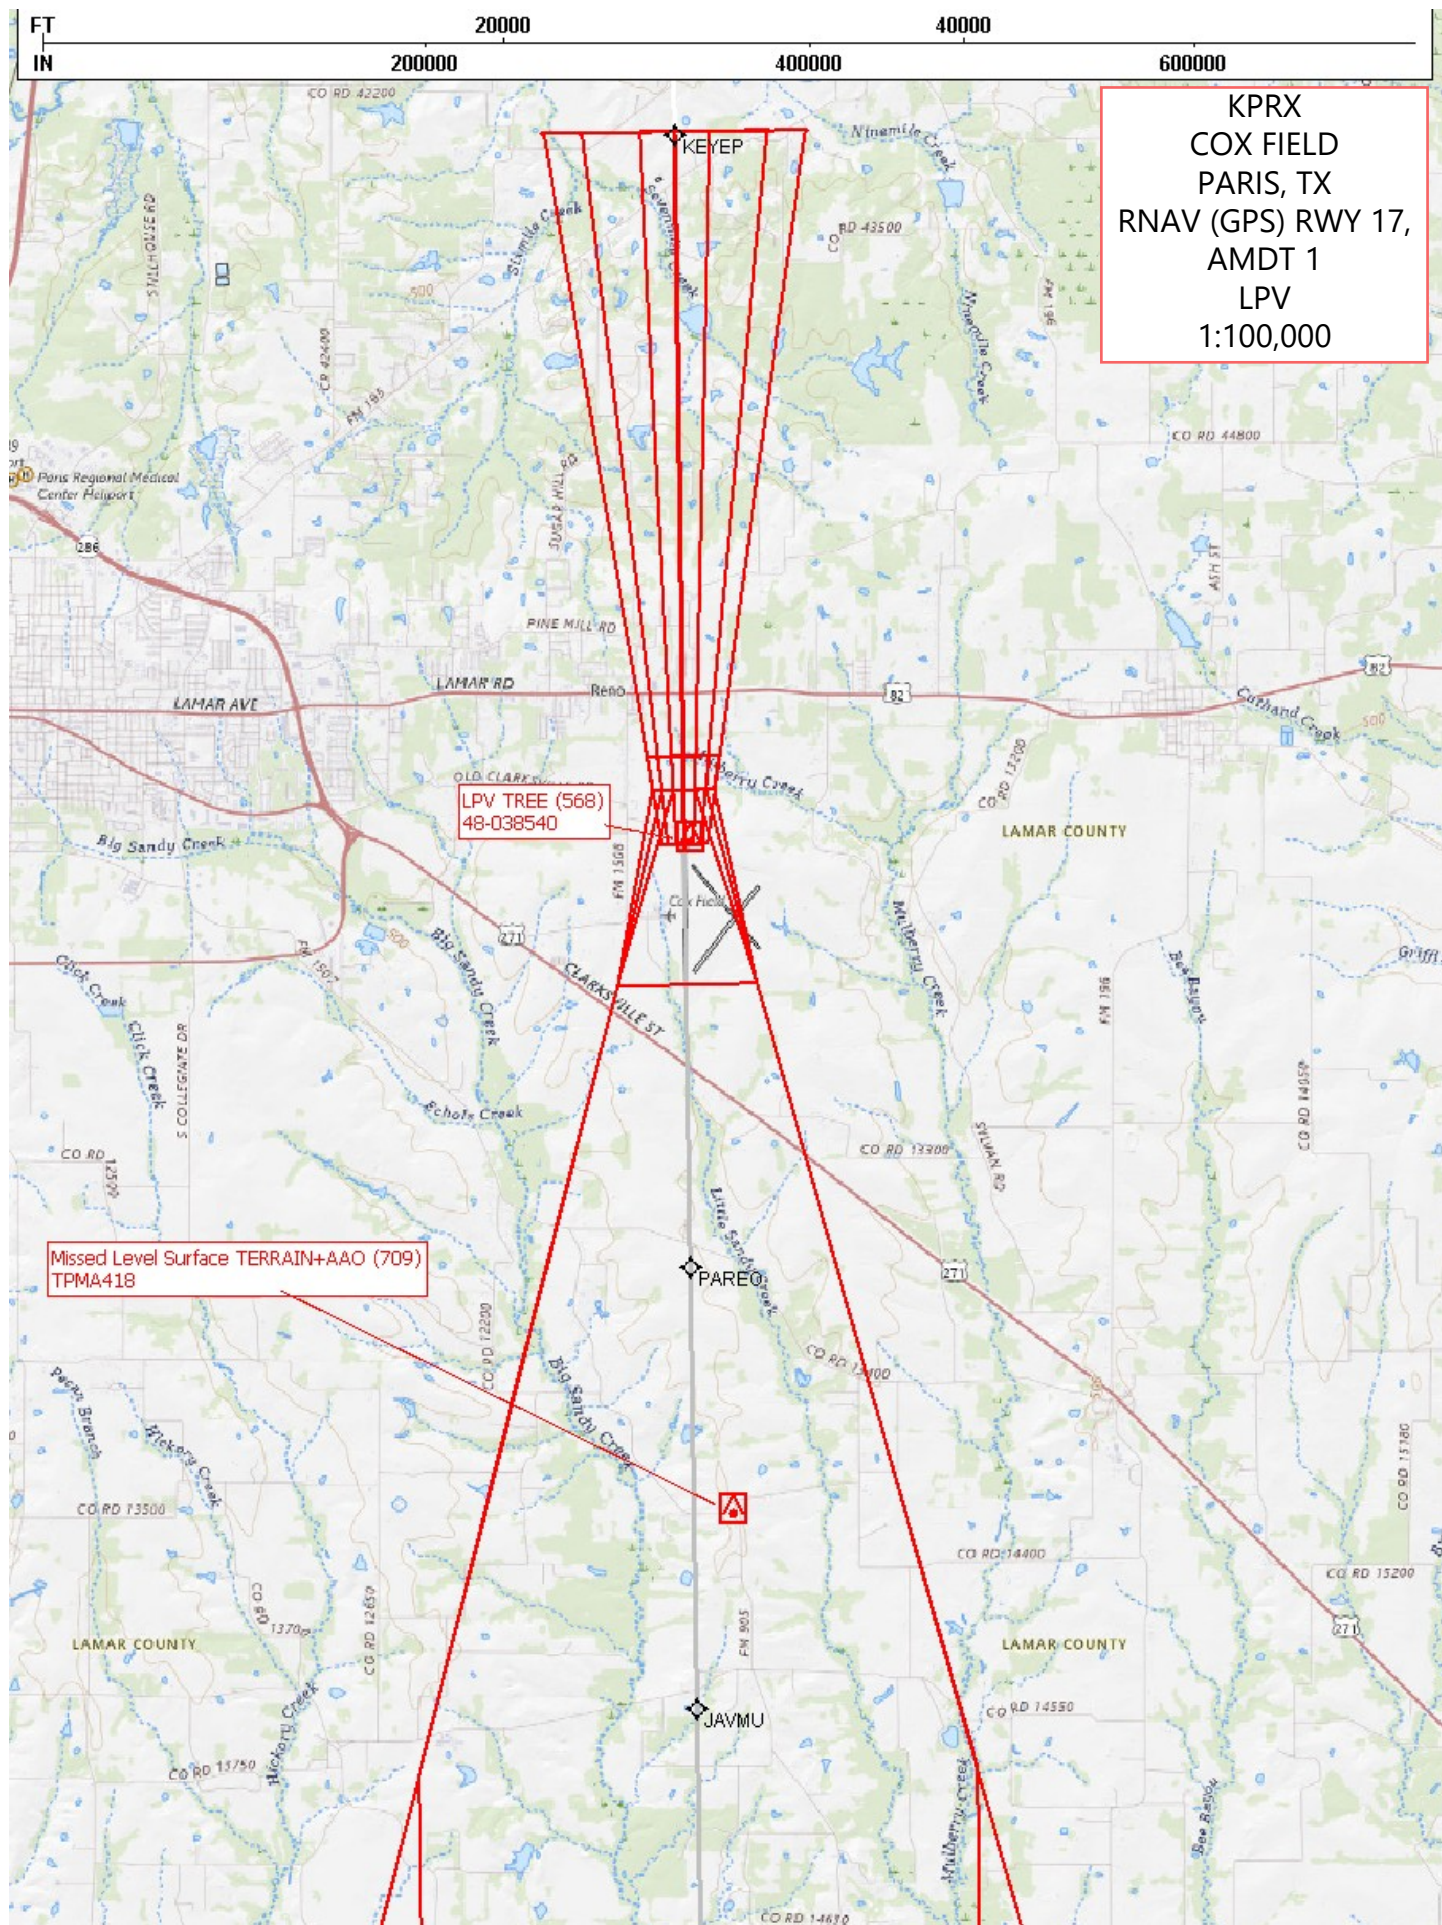

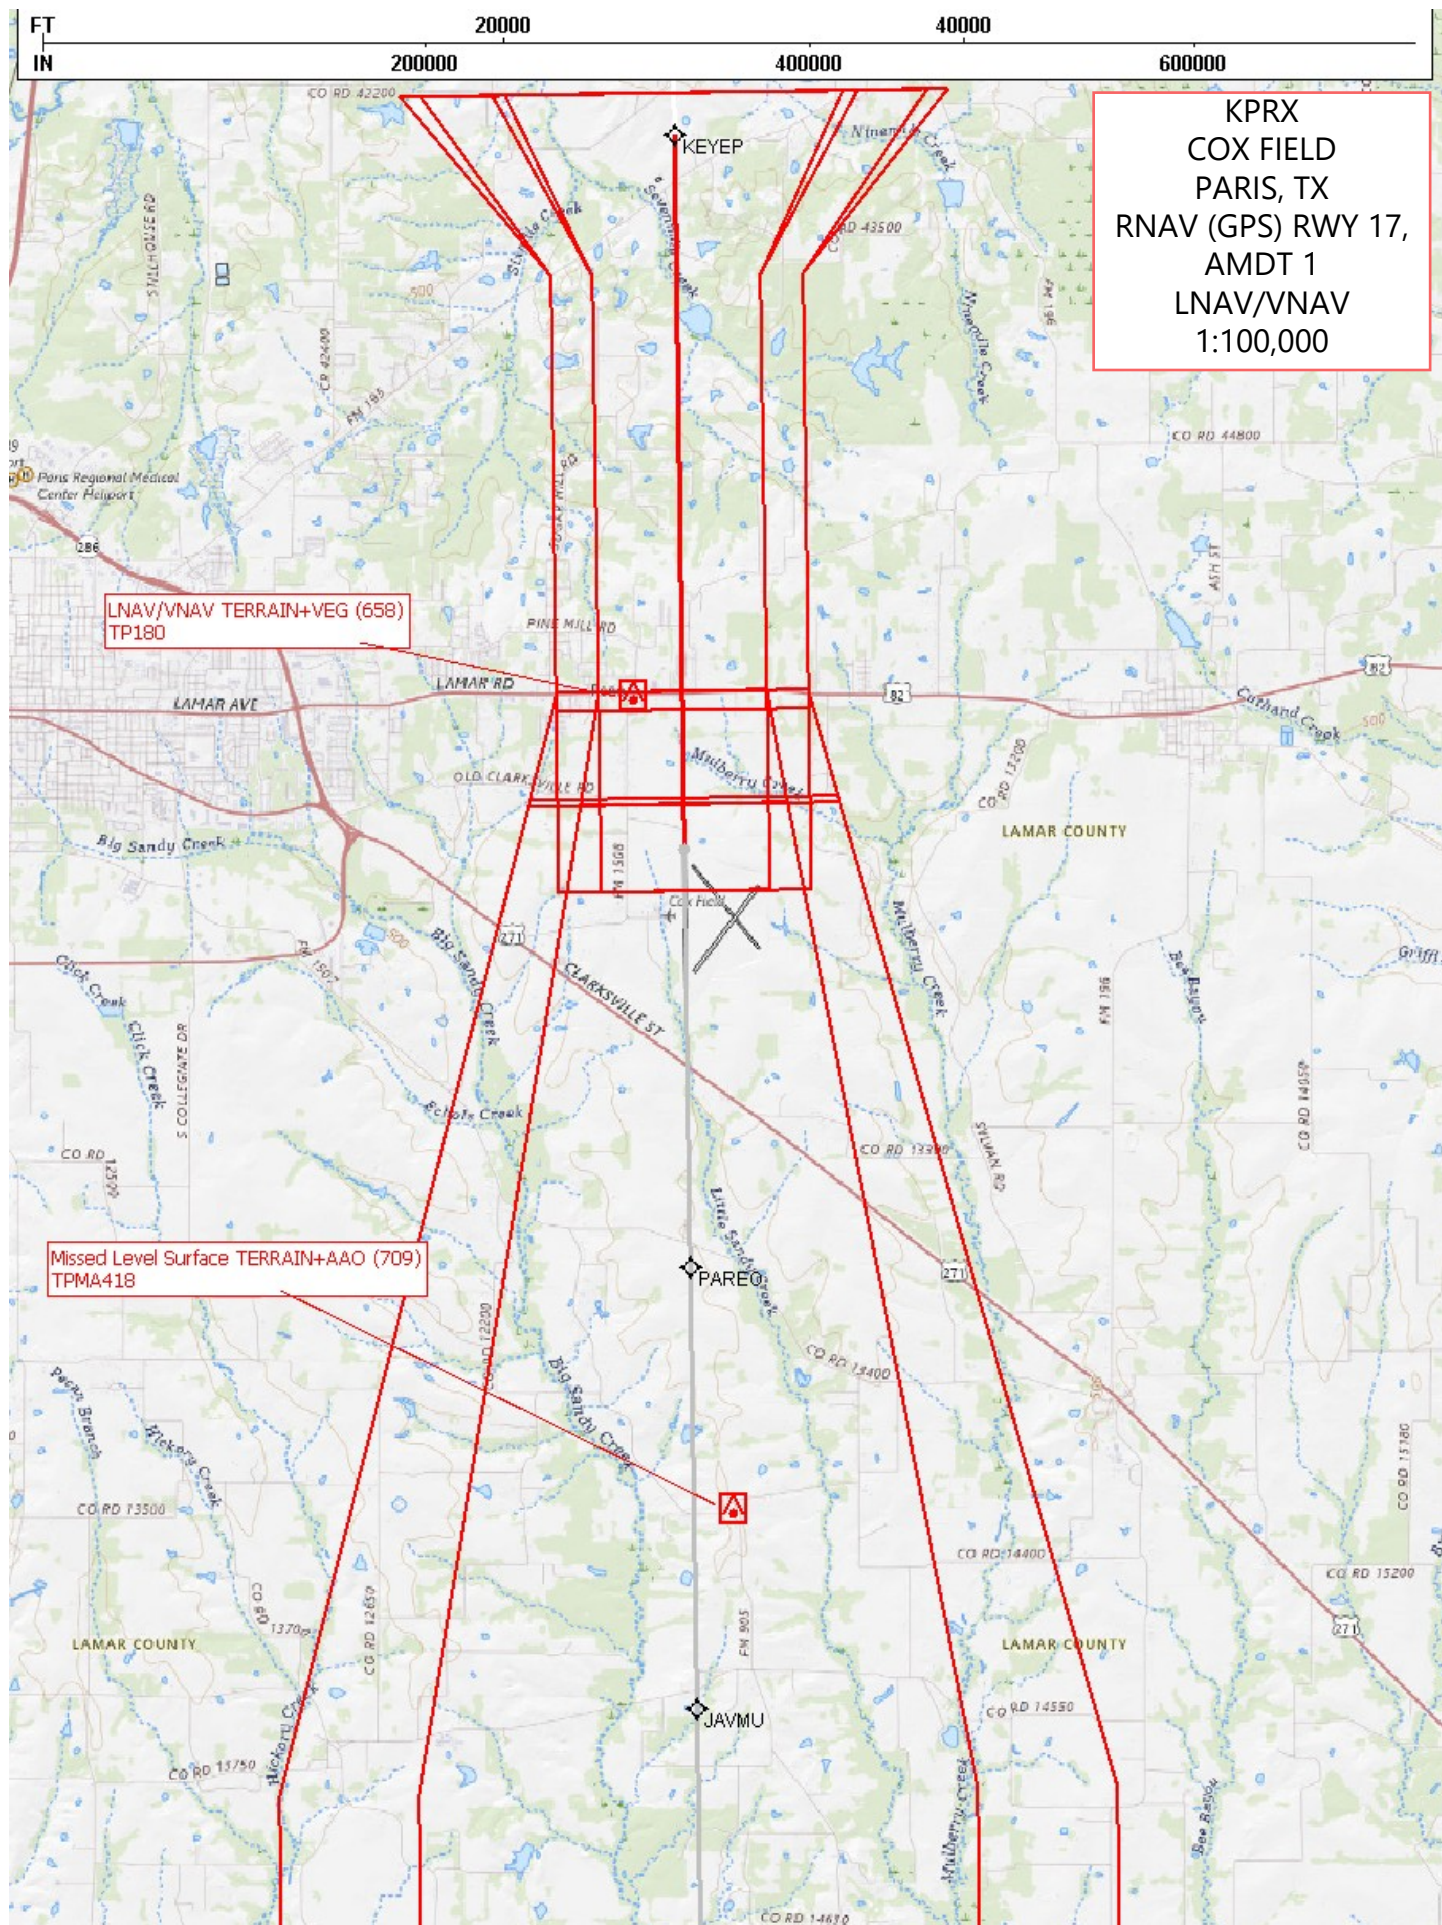

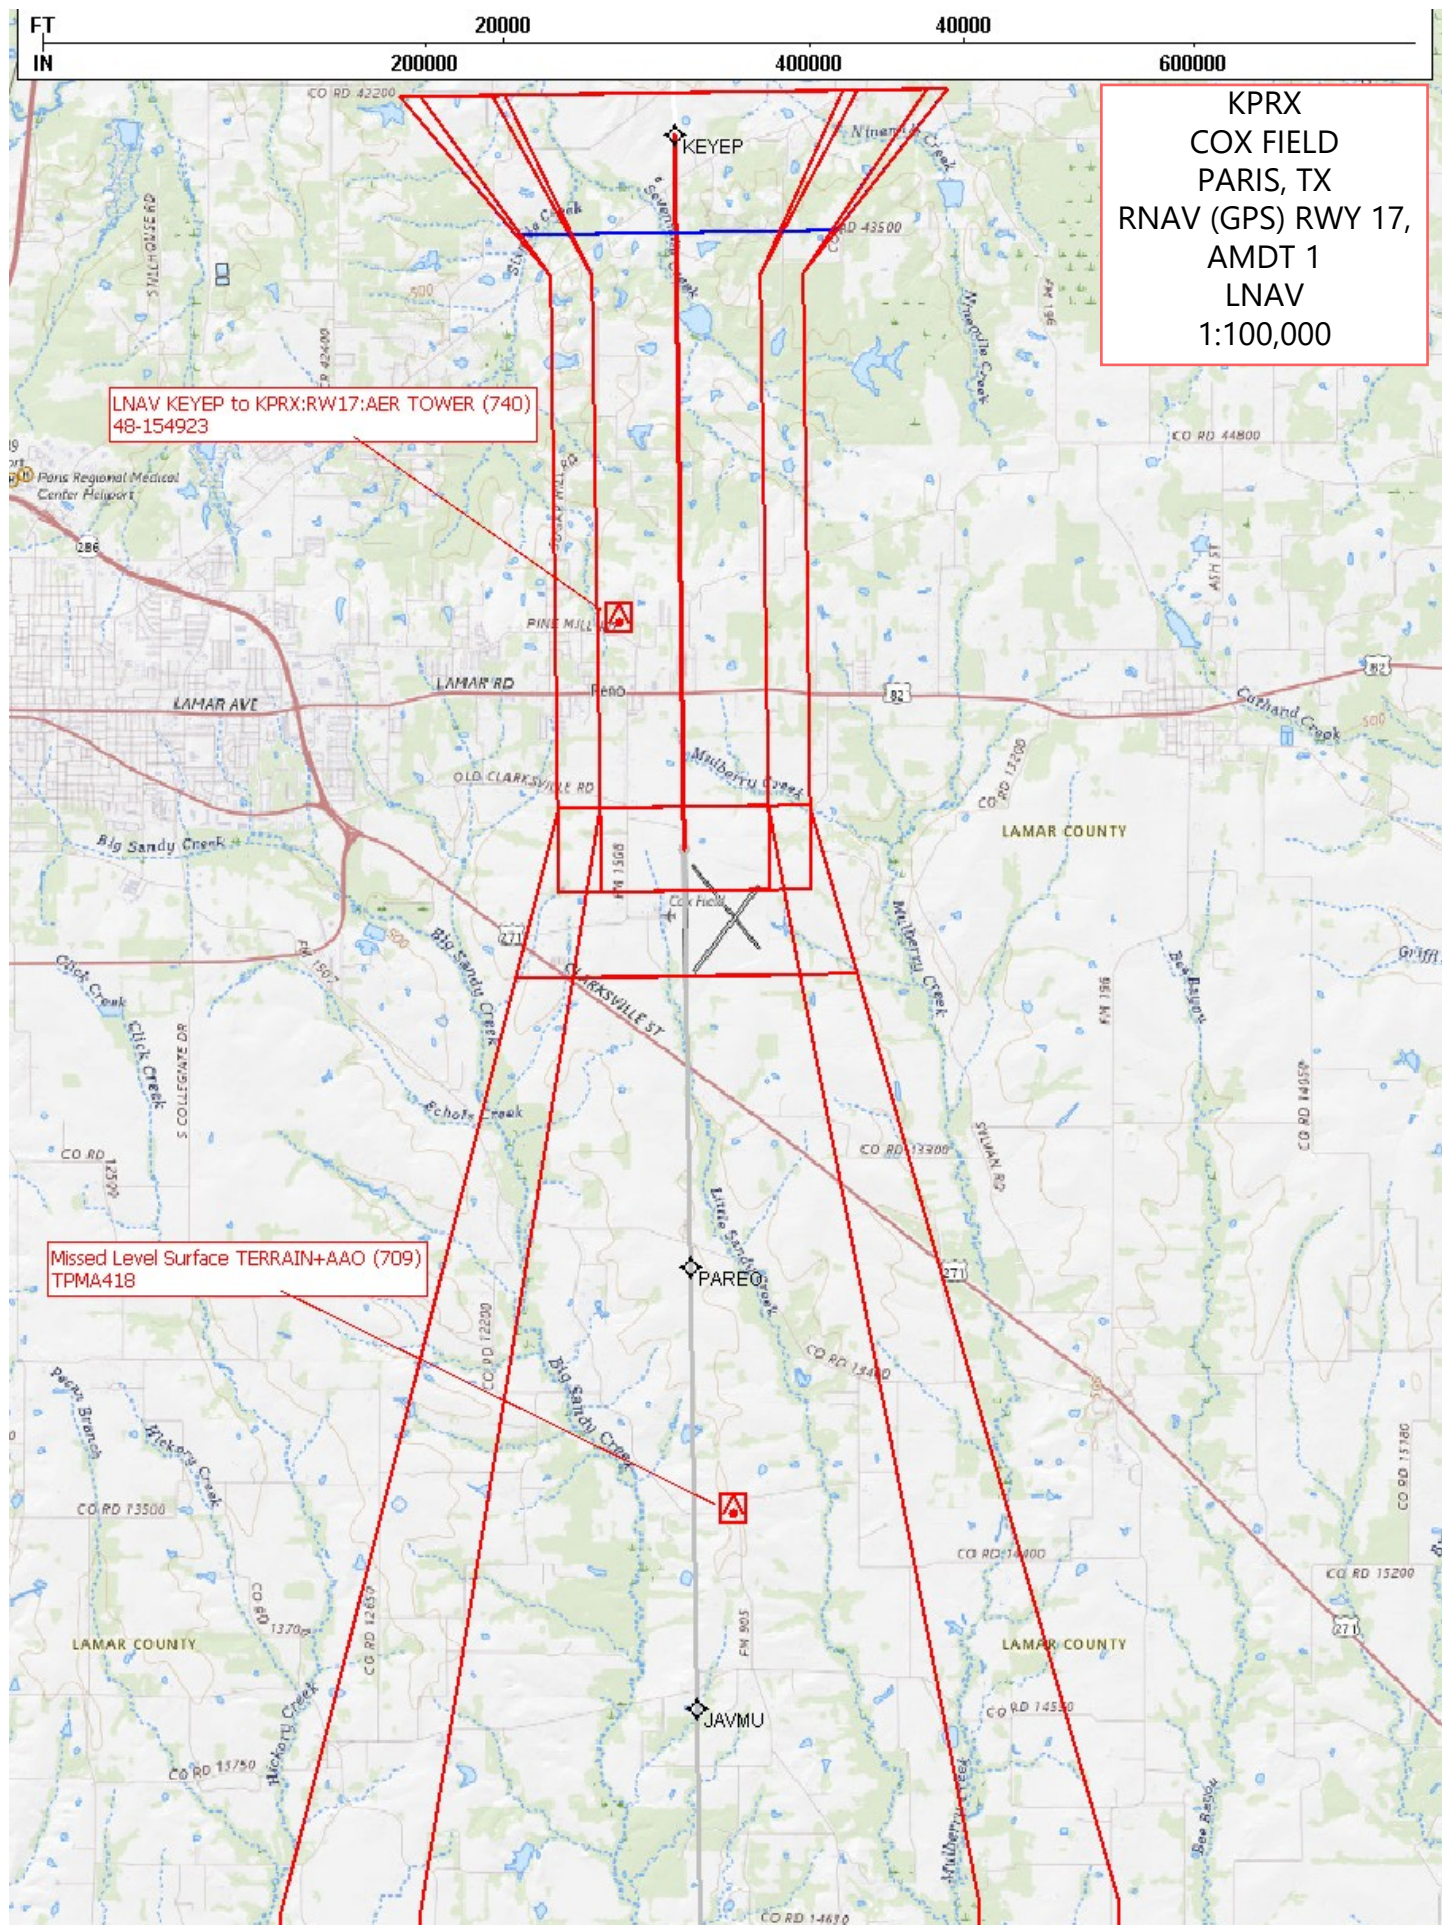

FT
IN

20000

40000

200000

400000

600000

KPRX
COX FIELD
PARIS, TX
RNAV (GPS) RWY 17,
AMDT 1
CIRCLING
1:100,000

