WAAS CH 45927 W28A	APP CRS **284°**	Rwy ldg **6009** TDZE **25** APT Elev **41**

RNAV (GPS) RWY 28

NOME (PAOM)

CIRCLING NA FOR CATS C AND D N OF RWY 10-28. FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -18°C OR ABOVE 54°C.RWY 28 HELICOPTER VISIBILITY REDUCTION BELOW RVR 4000 NOT AUTHORIZED. INOPERATIVE TABLE DOES NOT APPLY TO LPV ALL CATS.FOR INOPERATIVE ALS, INCREASE LNAV/VNAV ALL CATS VISIBILITY TO RVR 4500, LNAV CATS A/B VISIBILITY TO RVR 5500, CATS C/D VISIBILITY TO RVR 6000. WHEN NOME FSS CLOSED, INCREASE VISIBILITY ALL CATS TO RVR 5000.

MISSED APPROACH:

CLIMB TO 3700 DIRECT SPYVY AND HOLD, CONTINUE CLIMB-IN-HOLD TO 3700

AFIS	ANCHORAGE CENTER	NOME RADIO
119.925	**133.3 290.4**	**123.6** (CTAF)

PROTOTYPE-NOT FOR NAVIGATION

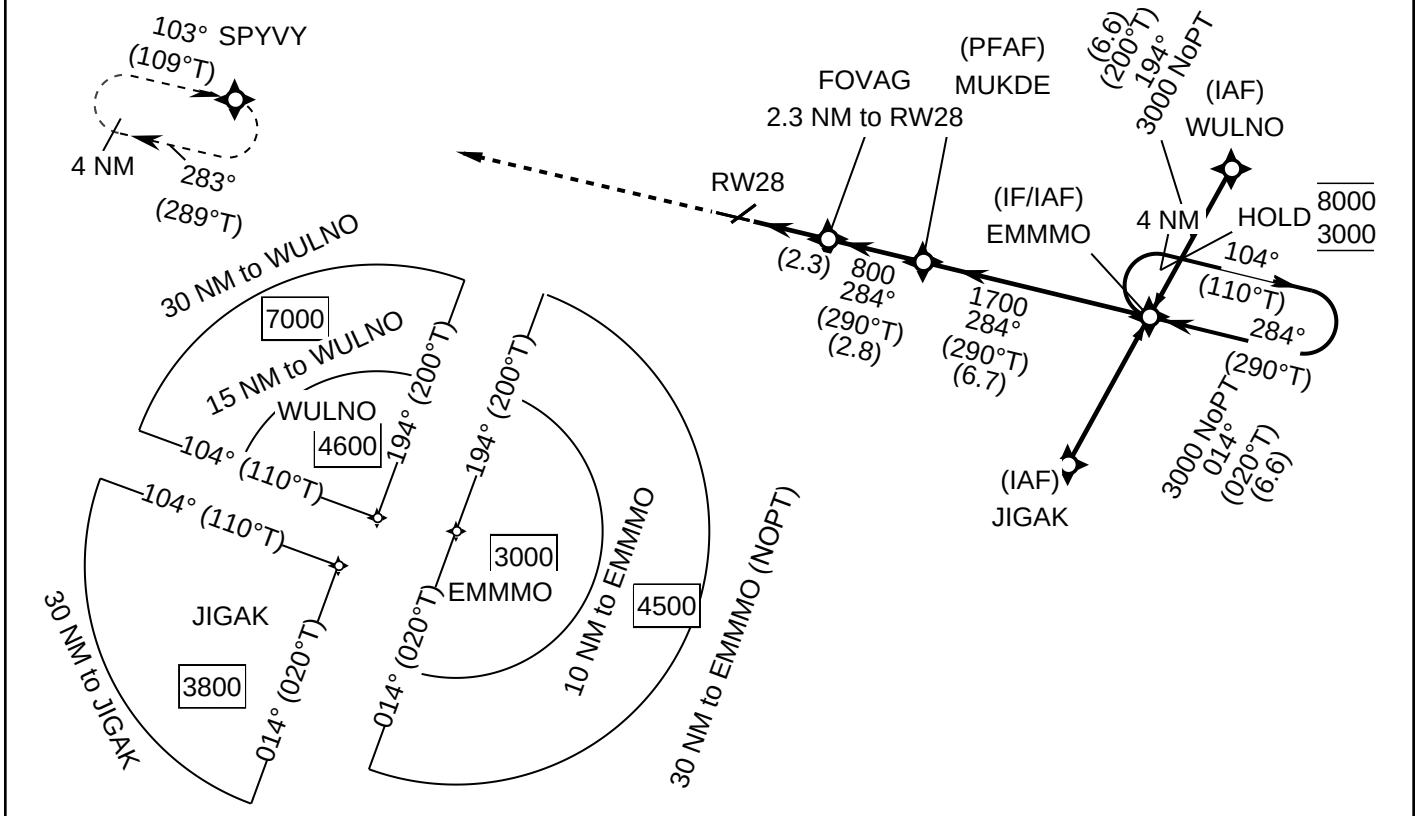

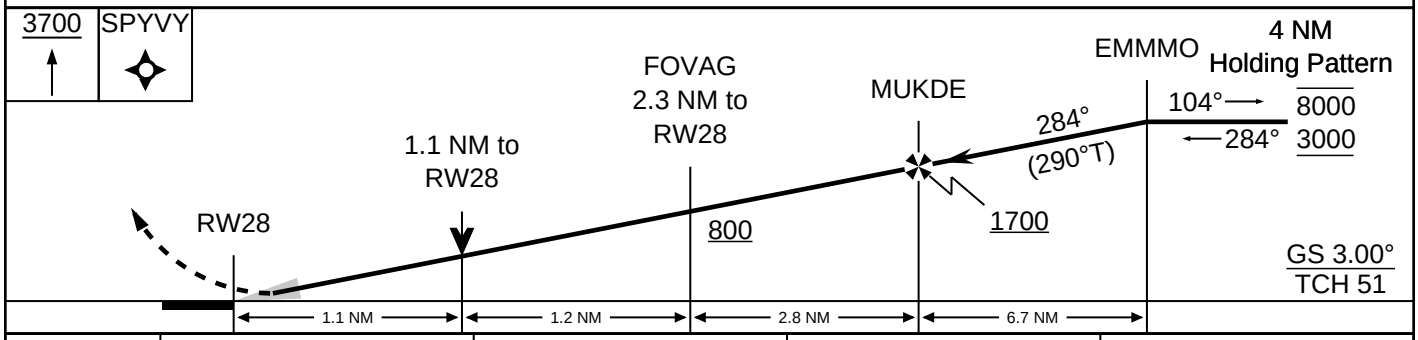

CATEGORY	A	B	C	D
LPV	225-5000 200			
LNAV/VNAV	301-5000 276			
LNAV	440-5000 415			
CIRCLING	540-1 499	560-1 519	560-1 1/2 519	700-2 659