WAAS CH **61205** **W36A**	APP CRS **360°**	Rwy ldg **5503** TDZE **1498** APT Elev **1498**

RNAV (GPS) RWY 36

MC PHERSON (KMPR)

FIG

RNP APCH - GPS.

Circling NA to Rwys 8 and 26. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using SLN altimeter setting. When local altimeter setting not received, use SLN altimeter setting and increase LPV DA to 1789 feet and all visibilities 1/8 SM; LNAV/VNAV DA to 2036 feet and all visibilities 1/8 SM; and all MDAs 100 feet and LNAV and circling visibility Cat C 1/4 SM.

MISSED APPROACH: Climb to 4000 direct INMOM and hold, continue climb-in-hold to 4000.

AWOS-3P 119.025	WICHITA APP CON 125.5 306.2	UNICOM 122.8 (CTAF)

PROTOTYPE-NOT FOR NAVIGATION

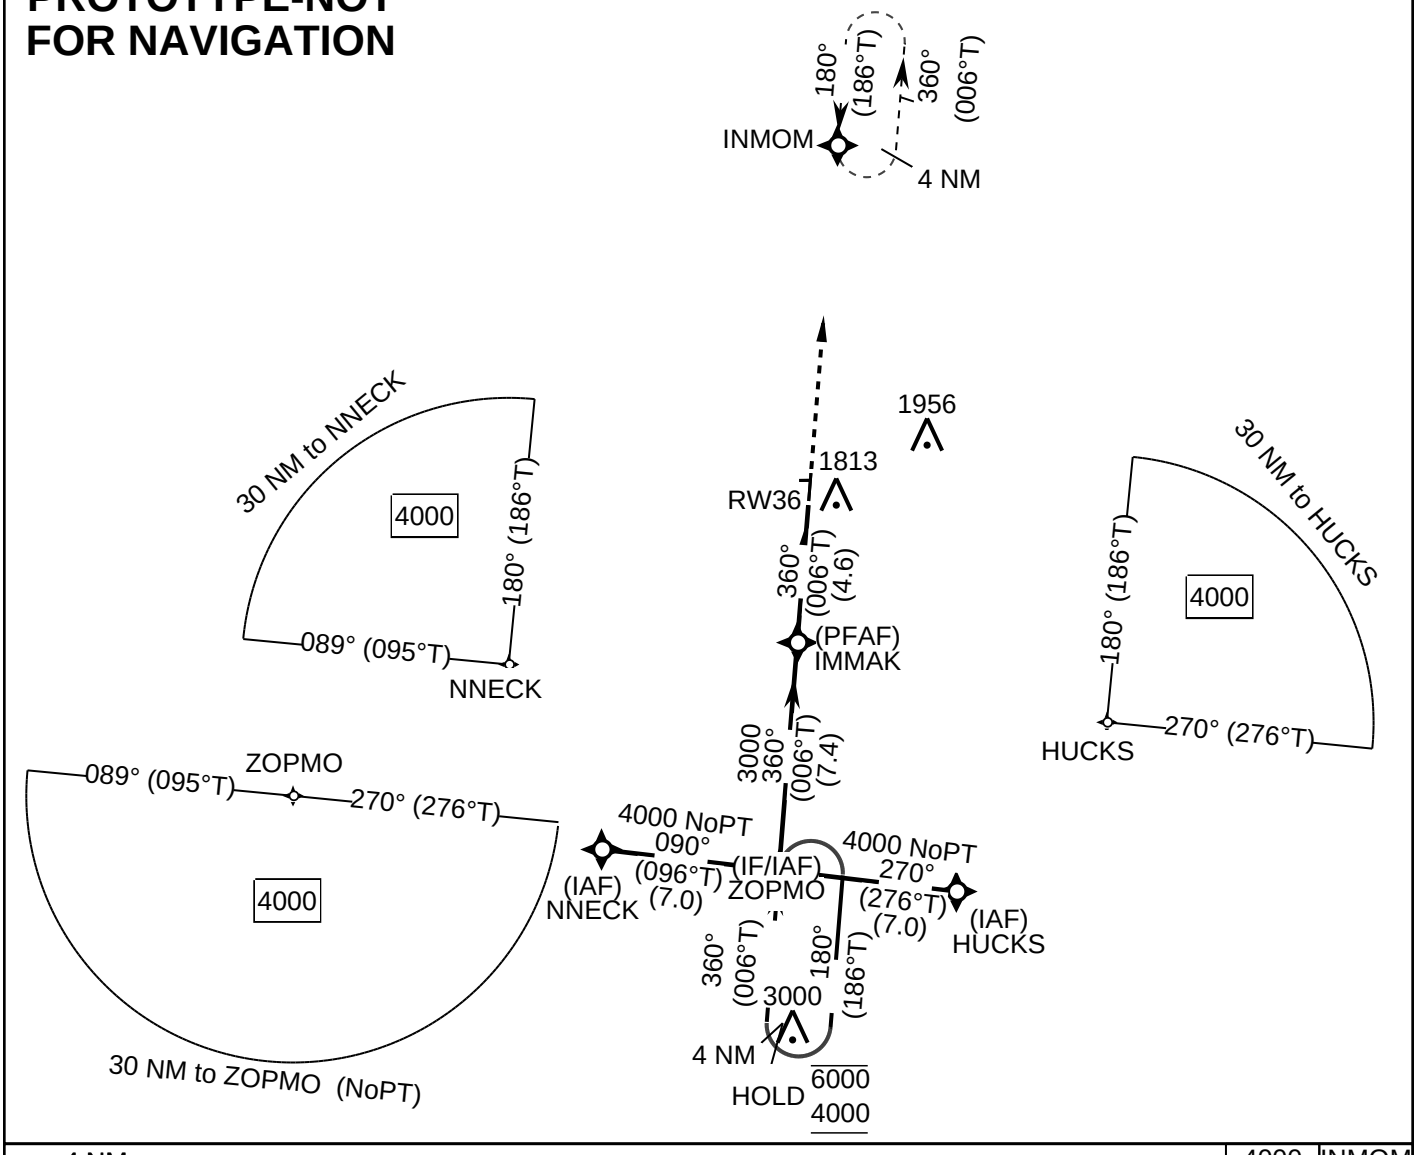

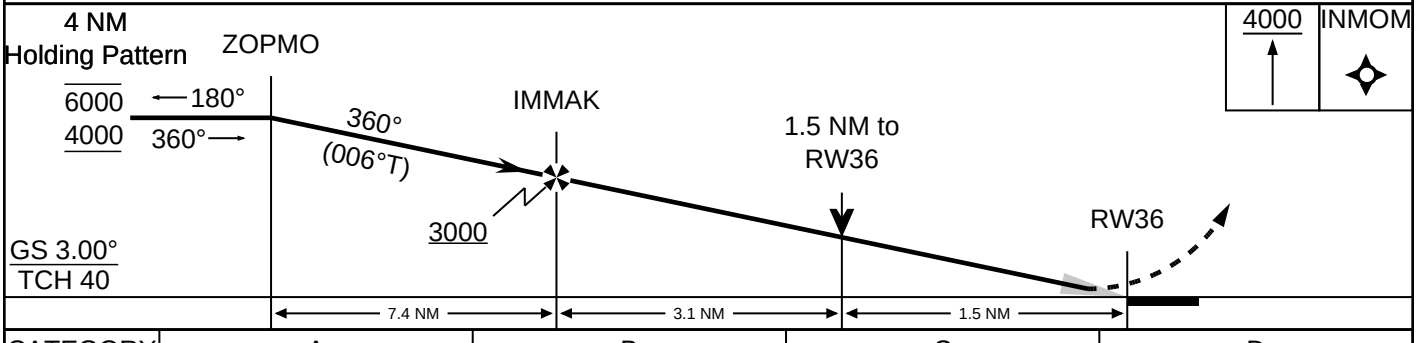

CATEGORY	A	B	C	D
LPV	1698-3/4 200			NA
LNAV/VNAV	1945-1 3/8 447			NA
LNAV	2020-1 522		2020-1 1/2 522	NA
CIRCLING	2120-1 622		2120-1 3/4 622	NA