

Flight Procedures Cover Page	Task Action: P-NOTAM	Task Type: IAP	Estimated Chart Date: 09/03/2026	APWS Task ID: 5E693F91795744C48DA50C8736D591AE	APWS Project ID: 1E3421A4402D4AD389E1D0E8493F9CC4
Procedure: RNAV (GPS) Y RWY 29 ORIG-E		Enroute: NO	Specialist: Johnson, Timothy		Agreement Number:
Airport ID: KSTL			Airport City: ST LOUIS		State: MO
Facility ID:	Facility Type:	Flight Inspection Remark Type:			
Procedure Comments: Visibility Initiative (Garmin) - Update IAP visibility minimums IAW Order 8260.3, Chapter 3, Section 3-3. Visibility Minimums. PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021, SUBJECT: GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/VALIDATION. CONTACT: CASEY HILL (405) 954-0624. QUALITY 6 SN 4/20/26 CHECKED QUALITY 41 CHECKED					

ST. LOUIS, MISSOURI

AL-360 (FAA)

25219



WAAS CH 42500 W29A	APP CRS 303°	Rwy Ldg TDZE Apt Elev 9000 580 618
--	------------------------	--

RNAV (GPS) Y RWY 29

ST LOUIS LAMBERT INTL (STL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Rwy 29 helicopter visibility reduction below ¾ SM NA. Simultaneous approach authorized with Rwy 30R/L. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. DME/DME RNP-0.3 NA. For inop ALS, increase LPV all Cats visibility to RVR 6000, increase LNAV/VNAV Cat E visibility to 1¾, increase LNAV Cat A and B visibility to 1, Cat E visibility to 1¾.	ALSf-2 	MISSED APPROACH: Climb to 3000 direct CUTVO and on track 279° to HULSO and hold.
---	------------	---

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 132.475 239.275	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	---	---	--------------------------------	-------

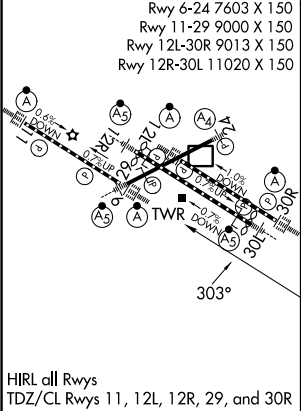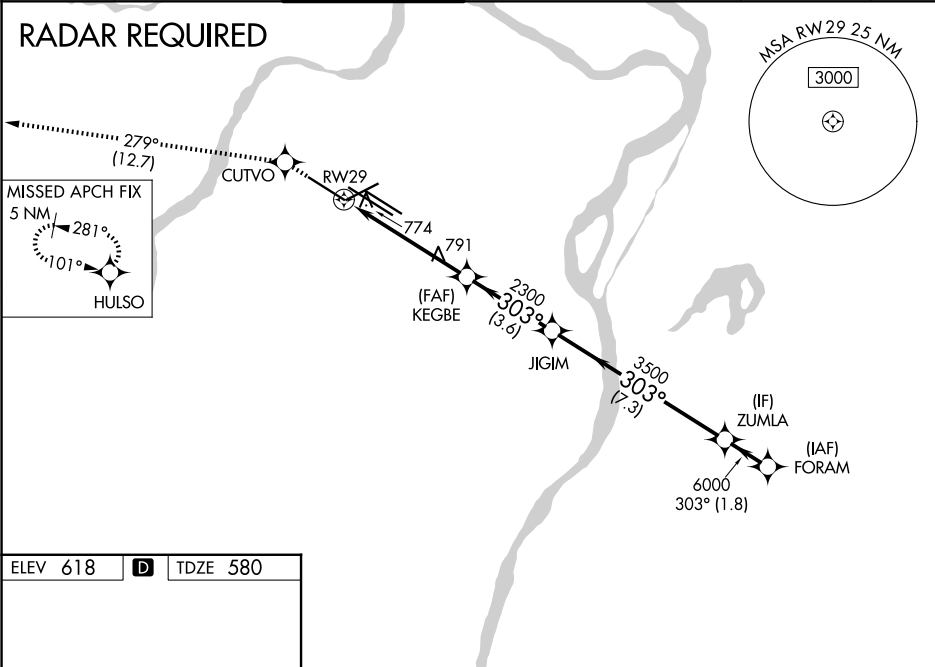

3000 ↑	CUTVO ✧	tr 279°	HULSO ✧	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).				
*LNAV only *1.5 NM to RW29 RW29 KEGBE 2300 3500 2300 303° 6000 6000 GP 3.00° TCH 56				JIGIM	ZUMLA	FORAM		
1.5				3.7 NM	3.6 NM	7.3 NM	1.8 NM	
CATEGORY		A		B	C	D	E	
LPV DA		943/40 363 (400-¾)						
LNAV/ VNAV DA		1074/60 494 (500-1¼)						
LNAV MDA		1100/40 520 (500-¾)		1100/50 520 (500-1)		1100/60 520 (500-1¼)		

ST. LOUIS, MISSOURI
Orig-D 17AUG17

38°45'N-90°22'W

ST LOUIS LAMBERT INTL (STL)
RNAV (GPS) Y RWY 29

NC-3, 16 APR 2026 to 14 MAY 2026

NC-3, 16 APR 2026 to 14 MAY 2026