

Flight Procedures Cover Page	Task Action: P-NOTAM	Task Type: IAP	Estimated Chart Date: 09/03/2026	APWS Task ID: 63C2B1853D664EF886E11357520B685F	APWS Project ID: B96DED8AAB474C3B9B48CE979C5372B4
Procedure: ILS or LOC RWY 10R AMDT 3E		Enroute: NO	Specialist: Johnson, Timothy		Agreement Number:
Airport ID: KFCM			Airport City: MINNEAPOLIS		State: MN
Facility ID: FCM	Facility Type: ILS	Flight Inspection Remark Type:			
Procedure Comments: Visibility Initiative (Garmin) - Update IAP visibility minimums IAW Order 8260.3, Chapter 3, Section 3-3. Visibility Minimums. PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021, SUBJECT: GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/VALIDATION. CONTACT: CASEY HILL (405) 954-0624. QUALITY 6 SN 3/16/26 CHECKED QUALITY 41 CHECKED					

OLD

MINNEAPOLIS, MINNESOTA

AL-5094 (FAA)

25331

LOC IFCM 109.7	APP CRS 098°	Rwy Ldg TDZE Apt Elev 5001 906 906
--------------------------	------------------------	--

ILS or LOC RWY 10R


FLYING CLOUD (FCM)

⚠ When local altimeter setting not received, use Minneapolis-St Paul Intl/Wold Chamberlain altimeter setting and increase all DA 34 feet and all MDA 40 feet, increase S-LOC Cat C and D visibility ¼ mile, GOBKE fix minimums: Increase S-LOC Cat C visibility ¼ mile. When Circling to Rwy 18, 36 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MALSR 

MISSED APPROACH: Climb to 1800 then climbing right turn to 2700 direct FCM VOR/DME and hold, continue climb-in-hold to 2700.

ATIS 124.9	MINNEAPOLIS APP CON 134.7 284.7	FLYING CLOUD TOWER ★ 119.15 (CTAF) 0	GND CON 121.7	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

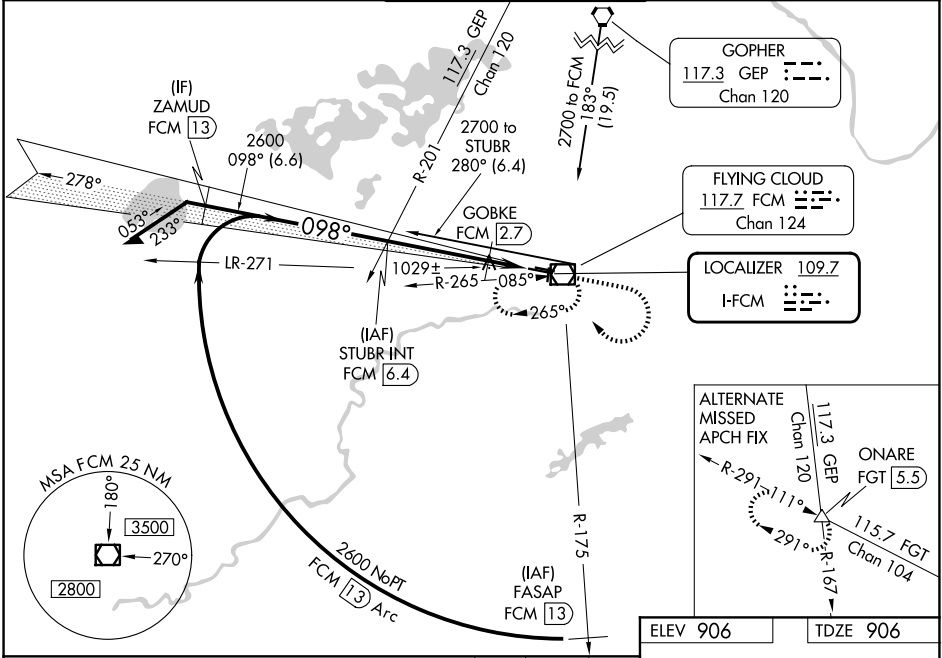

Remain within 10 NM

STUBR INT FCM 6.4

*1440 when using Minneapolis-St Paul/Wold-Chamberlain altimeter setting.

1800 2700 FCM

GS 3.00° TCH 42

2700 278° 098° 2600

GOBKE FCM 2.7

*LOC only.

FCM 1.2

*1400

3.7 NM 1.5 NM

CATEGORY	A	B	C	D
S-ILS 10R	1106-½		200 (200-½)	
S-LOC 10R	1400-½	494 (500-½)	1400-¾ 494 (500-¾)	1400-1 494 (500-1)
CIRCLING	1400-1 494 (500-1)	1440-1 534 (600-1)	1440-1½ 534 (600-1½)	1540-2 634 (700-2)
GOBKE FIX MINIMUMS (DME REQUIRED)				
S-LOC 10R	1280-½ 374 (400-½)		1280-¾ 374 (400-¾)	
CIRCLING	1320-1 414 (500-1)	1440-1 534 (600-1)	1440-1½ 534 (600-1½)	1540-2 634 (700-2)

ELEV 906 TDZE 906

HIRL Rwy 10R-28L 0

REIL Rwys 10L and 28R

REIL Rwys 18, 28L, and 36 0

MIRL Rwy 10L-28R

MIRL Rwy 18-36 0

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

MINNEAPOLIS, MINNESOTA

Amdt 3D 07OCT21

44°50'N-93°28'W

FLYING CLOUD (FCM)

ILS or LOC RWY 10R

NC-1, 19 FEB 2026 to 19 MAR 2026

NC-1, 19 FEB 2026 to 19 MAR 2026