

LOC I-VIY	APP CRS	Rwy Idg	20R	20C
		TDZE	7702	8001
		Apt Elev	578	588
111.3	201°		599	599

ILS or LOC RWY 20R

NASHVILLE INTL (BNA)



RADAR required for procedure entry. DME or RADAR required.

Simultaneous approach authorized. Inop table does not apply to S-ILS 20R all Cats. DME from BNA VORTAC. DME use requires simultaneous reception of I-VIY and BNA DME.

MALSF

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 on heading 300° and on BNA VORTAC R-270 to BEVEE/BNA 22.4 DME and hold.

D-ATIS	NASHVILLE APP CON	NASHVILLE TOWER	GND CON	CLNC DEL	CPDLC
135.1	118.4 360.7	118.6 257.8	121.9 348.6	126.05	

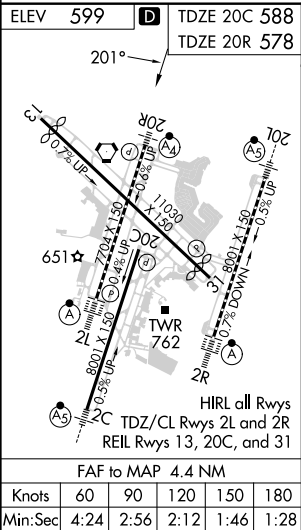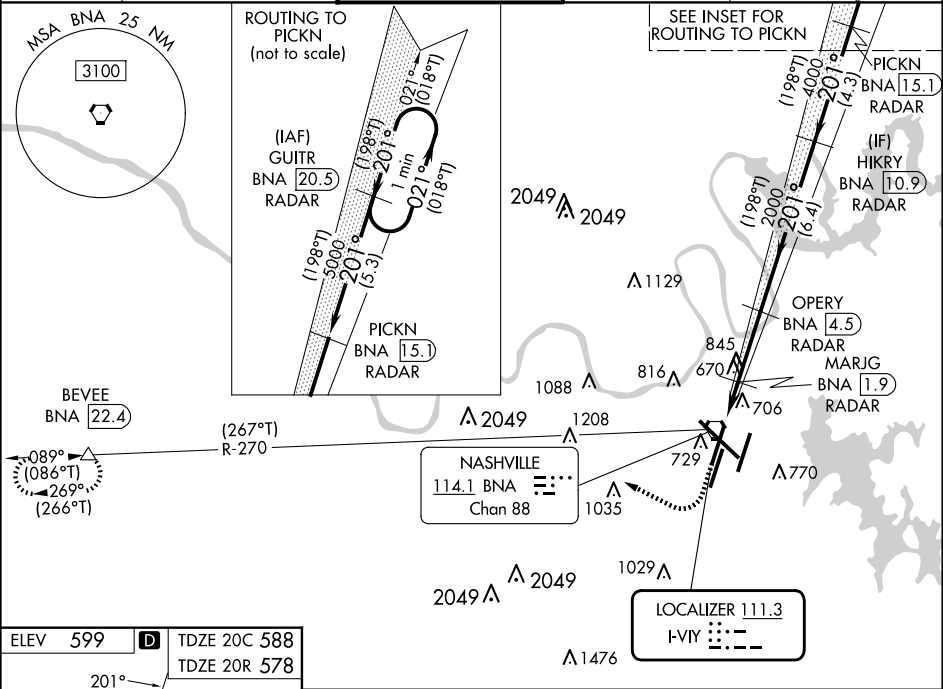

CATEGORY	S-ILS 20R			
	A	B	C	D
S-ILS 20R	778/40	200 (200-¾)		
S-LOC 20R	920/40	342 (400-¾)	920/50	342 (400-1)
SIDESTEP 20C	960-1	372 (400-1)	960-1½ 372 (400-1½)	960-2 372 (400-2)
CIRCLING	1100-1 501 (600-1)	1120-1 521 (600-1)	1200-1¾ 601 (700-1¾)	1380-2½ 781 (800-2½)