
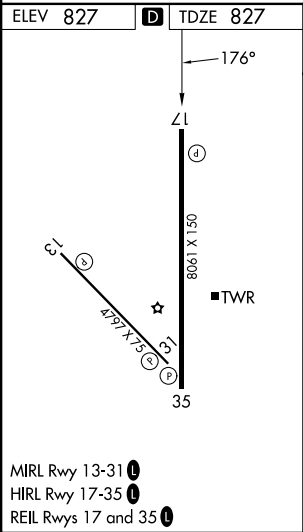


WAAS CH 70535 W17A	APP CRS 176°	Rwy Ldg TDZE Apt Elev	8061 827 827
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17
ROSECRANS MEML (STJ)

RNP APCH - GPS.	When local altimeter setting not received, use MCI altimeter setting and increase LPV DA to 1121 feet and all visibilities ½ SM, increase LNAV/VNAV DA to 1171 feet and all visibilities ¼ SM; increase all MDAs 100 feet and LNAV visibility Cat C/D/E ¾ SM and Circling visibility Cat C/D ½ SM. Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA when using MCI altimeter setting.	MISSED APPROACH: Climb to 3000 direct FILUX and hold.
-----------------	--	---

ATIS 125.05	ST. JOSEPH APP CON ★ 120.35 360.8	ST. JOSEPH TOWER ★ 126.9 (CTAF) 239.0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

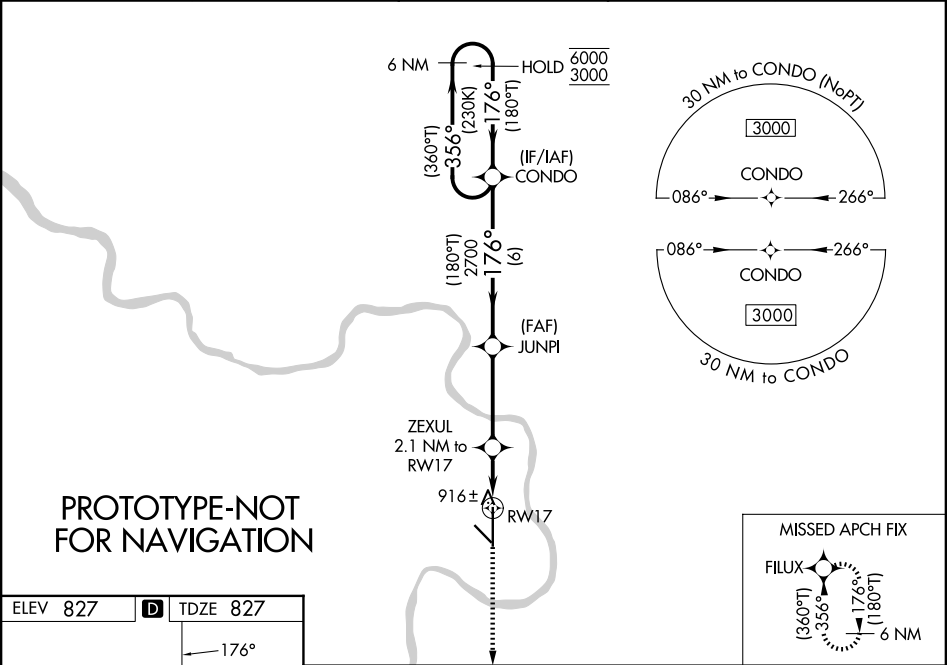

	6 NM Holding Pattern	CONDO	JUNPI	ZEXUL 2.1 NM to RW17	3000	FILUX
	6000 3000	(360°T) 176° (180°T)	2700	2700 1560	0.9 NM to RW17	
	GP 3.00° TCH 56					
CATEGORY	A	B	C	D	E	
LPV DA		1027-¾	200 (200-¾)			
LNAV/VNAV DA		1077-¾	250 (300-¾)			
LNAV MDA		1180-1	353 (400-1)			
CIRCLING	1400-1 573 (600-1)	1420-1 593 (600-1)	1620-2 793 (800-2¼)	1640-2 813 (900-2¾)	1760-3 933 (1000-3)	