

Flight Procedures Cover Page	Task Action: Abbreviated Amendment	Task Type: SID	Estimated Chart Date: 01/22/2026	APWS Task ID: 69461C2CD8E643B19EA873DC0B750C1D	APWS Project ID: F42B78092599475B8278BF84D773E6BD
Procedure: AHMET DEPARTURE (RNAV) AMDT FIVE		Enroute: YES	Specialist: Miller, Ralph		Agreement Number:
Airport ID: KBKL			Airport City: CLEVELAND		State: OH
Facility ID:	Facility Type:	Flight Inspection Remark Type:			
Procedure Comments: PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021, SUBJECT: GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/VALIDATION ACTIVE DATA USED CLEARs NOTAM !FDC 5/4429. AHMET 5 SID RWY 6R, 24L TAKEOFF MINIMUMS NA WHEN TOWER IS CLOSED. ALL OTHER DATA REMAINS AS PUBLISHED. CONTACT: KYLE THOMPSON 405-954-2135					

QUALITY
20
CHECKED


QUALITY
9
CHECKED
BEGUE

ATIS
125.25
CLNC DEL
339.8
121.9 (when tower closed)
GND CON
121.9 339.8
LAKEFRONT TOWER ★
124.3 (CTAF) 339.8
CLEVELAND DEP CON
125.35 346.325

OLD

TOP ALTITUDE:
ASSIGNED BY ATC

TAKEOFF MINIMUMS:
Rwys 6L/R, 24R: Standard with minimum climb of 500' per NM to 1100.
Rwy 24L: 400-13/8 or standard with minimum climb of 757' per NM to 1000.

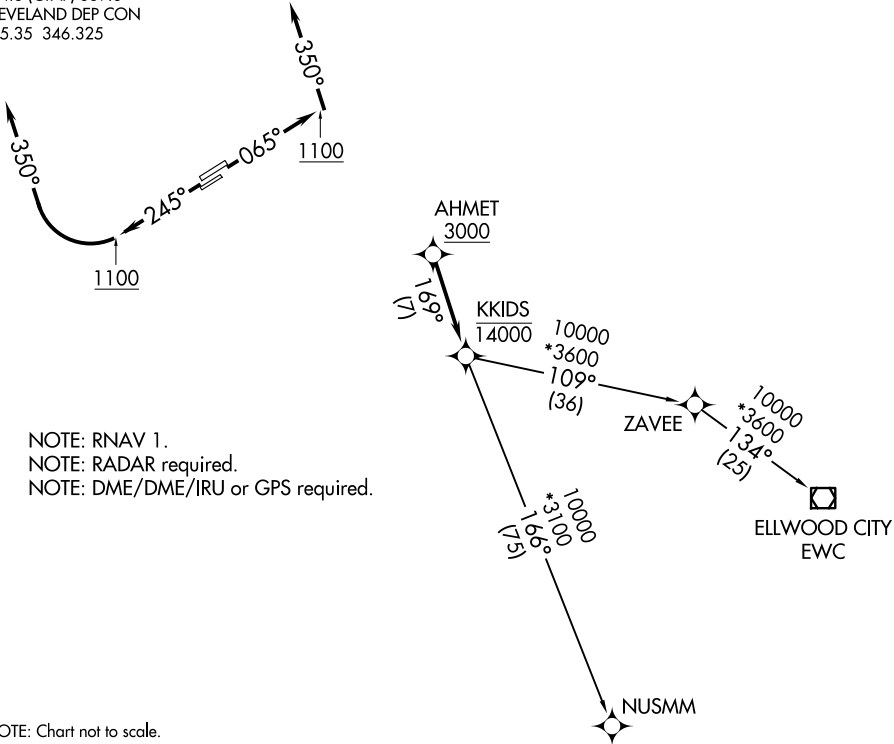

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 6L/R: Climb on heading 065° to 1100, then on heading 350° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross AHMET at or above 3000, thence....
TAKEOFF RUNWAYS 24L/R: Climb on heading 245° to 1100, then right turn to heading 350° or as assigned by ATC, maintain 2000 (do not climb above 2000) for RADAR vectors to cross AHMET at or above 3000, thence....
....on track 169° to cross KKIDS at or below 14000, then on (transition).
Maintain altitude assigned by ATC, expect filed altitude ten minutes after departure.

ELLWOOD CITY TRANSITION (AHMET4.EWC)
NUSMM TRANSITION (AHMET4.NUSMM)