

Flight Procedures Cover Page	Task Action: P-NOTAM	Task Type: IAP	Estimated Chart Date: 12/26/2024	APWS Task ID: 7260997CC5614318956B021A90B24584	APWS Project ID: CA8385F0108442E0AD1FA6740A073F60
Procedure: VOR RWY 35L AMDT 7C		Enroute: NO	Specialist: Neidigh, Jon		Agreement Number:
Airport ID: KGFK			Airport City: GRAND FORKS		State: ND
Facility ID:	Facility Type:	Flight Inspection Remark Type:			
Procedure Comments: PROCESSED IAW TECHNICAL SUPPORT GROUP (AJF-17) MEMO DATED 07/07/2021 GUIDANCE FOR PROCEDURAL CHANGES REQUIRING FLIGHT INSPECTION/VALIDATION INCREASED CAT D CIRCLING MINS FROM 1400 TO 1420 DUE TO NEW CONTROLLING OBSTACLE CONTACT JOSEPH ZEDER: 405-954-9111 PNOTAM:4/6802 QUALITY 41 CHECKED QUALITY 32 CHECKED Digitally signed by PABLO ORTIZ-JR Sep 05, 2024					

VOR/DME GFK	APP CRS	Rwy Idg	7351
114.3	344°	TDZE	845
Chan 90		Apt Elev	845



VOR RWY 35L
GRAND FORKS INTL (GFK)

⚠ When local altimeter setting not received, use Crookston altimeter setting and increase all MDA 80 feet; increase Cat C/D visibility to 1½ SM and Circling Cat C visibility ¼ SM. Increase ELVAW fix minimums Cat C/D visibility to RVR 4500 and Circling Cat C visibility ¼ SM. For inop ALS, increase S-35L Cat C/D visibility to 1¾ SM. ELVAW fix minimums: For inop ALS, increase S-35L Cat C/D visibility to RVR 5500.

MALSR
A6

MISSED APPROACH: Climb to 1300 then climb to 3600 on GFK R-360 then right turn direct GFK VOR/DME and hold.

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER★ 118.4(CTAF) 350.35	GND CON 124.575	CLNC DEL 135.725	UNICOM 122.95
---------------	--------------------------------------	--	--------------------	---------------------	------------------

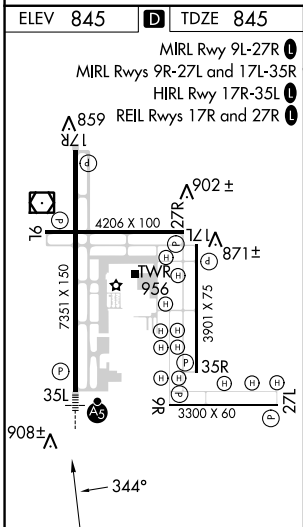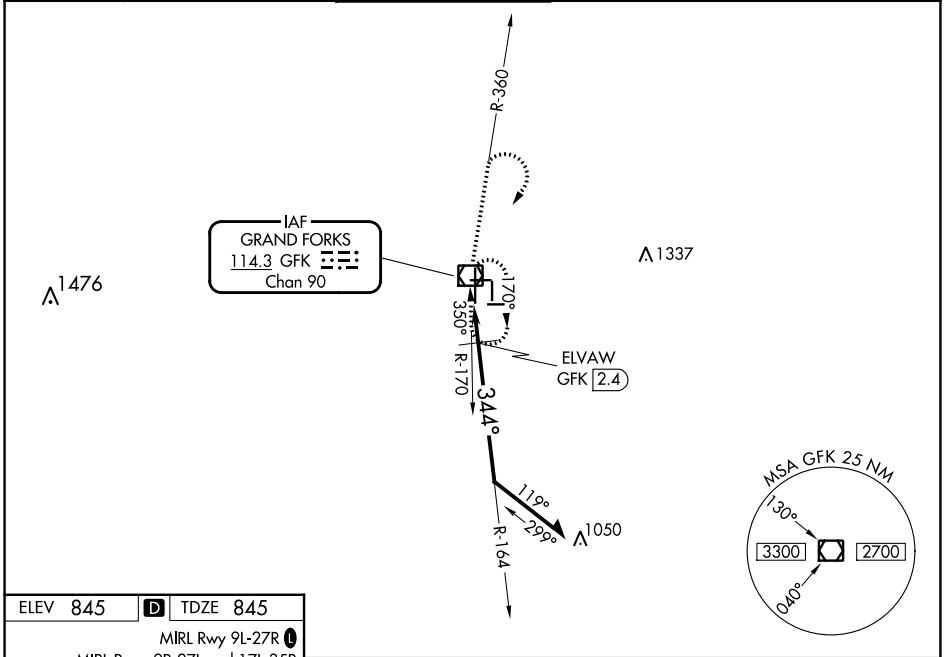

ELEV 845	D	TDZE 845	
MIRL Rwy 9L-27R	1		
MIRL Rwys 9R-27L and 17L-35R	1		
HIRL Rwy 17R-35L	1		
REIL Rwys 17R and 27R	1		
3300 X 60			
3901 X 75			
4206 X 100			
7351 X 150			
908±			
956			
902±			
871±			
344°			

1300	3600	GFK	GFK VOR/DME	Remain within 10 NM
GFK R-360				
VGSI and descent angles not coincident (VGSI Angle 2.76/TCH 61).				
*1440 when using Crookston altimeter setting.				
ELVAW GFK 2.4				
TCH 55				
1360*				
1.4 NM				

CATEGORY	A	B	C	D
S-35L	1360/24	515 (600-½)	1360/55	515 (600-1)
CIRCLING	1360-1	515 (600-1)	1400-1½	1400-2
			555 (600-1½)	555 (600-2)
ELVAW FIX MINIMUMS				
S-35L	1220/24	375 (400-½)	1220/40	375 (400-¾)
CIRCLING	1260-1	1300-1	1400-1½	1400-2
	415 (500-1)	455 (500-1)	555 (600-1½)	555 (600-2)