

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
JAZZZ (RNAV)	ONE	SPANE.JAZZZ1	NONE		

TRANSITION ROUTES:

Transition Name	Transition Computer Codes	From FIX/NAVAID	To FIX/NAVAID	Course	Distance	MEA	MOCA	MAA	Crossing Altitudes / Fixes
HELPR	HELPR.JAZZZ1	HELPR	HELPR						
			GOSHU	285.43	36.40	12400	12400		
			SPANE	284.98	15.00	12400	12400		AT 15000
MYTON	MTU.JAZZZ1	MTU VOR/DME	MTU VOR/DME						
			THISL	258.48	50.03	12400	12400		
			SPANE	257.77	15.38	12400	12400		AT 15000
RACER	RACER.JAZZZ1	RACER	RACER						
			MTU VOR/DME	261.86	57.31	12400	12400		
			THISL	258.48	50.03	12400	12400		
			SPANE	257.77	15.38	12400	12400		AT 15000

ARRIVAL ROUTE DESCRIPTION:

FROM SPANE ON TRACK 282.71/6.29 TO CROSS RUSHN AT OR ABOVE 13000, THEN ON TRACK 306.57/14.00 TO CROSS JAZZZ AT OR ABOVE 12000 AND AT 230 KIAS, THEN ON TRACK 324.62. EXPECT RADAR VECTORS FOR ILS OR RNAV APPROACH TO RWY 34L/R, 35 OR RADAR VECTORS TO FINAL APPROACH COURSE.

PBN REQUIREMENT NOTES:

RNAV 1 - GPS

EQUIPMENT REQUIREMENT NOTES:

RADAR REQUIRED

PROCEDURAL DATA NOTES:

NOTE: JET AIRCRAFT ONLY

NOTE: GPS REQUIRED.

NOTE: MYTON TRANSITION, ATC ASSIGNED ONLY.

FIXES AND/OR HOLDING PATTERNS:

CHART HOLDING AT HELPR: HOLD E, RT, 285.43 INBOUND, 12 NM LEGS.

CHART HOLDING AT RACER: HOLD E, LT, 262.47 INBOUND, 16 NM LEGS.

CHART HOLDING AT SPANE: HOLD E, RT, 284.76 INBOUND, 10 NM LEGS.

CHART HOLDING AT MTU VOR/DME: HOLD E, RT, 261.86 INBOUND, 12 NM LEGS.

COMMUNICATIONS:

CHART: SALT LAKE ARTCC

AIRPORTS SERVED:

AIRPORT ID
SLC

CITY
SALT LAKE CITY

STATE
UT



FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
JAZZZ (RNAV)	ONE	SPANE.JAZZZ1	NONE		

LOST COMMUNICATIONS PREFERENCES:

AFTER JAZZZ PROCEED ON THE ILS OR RNAV RWY 34L APPROACH.

REMARKS:

ADDITIONAL FLIGHT DATA:

DME/DME ASSESSMENT: UNSAT.
MAG VAR: SLC 11E/2020
CHART AT JAZZZ TERMINUS: SLC LDG RWY 34L/R, 35

FLIGHT INSPECTED BY:

CHRISTOPHER R VANDEVEER

ORGANIZATION:

AJF

DATE:

12/18/2024

Flight Inspected Signature:

Digitally signed by
ROBERT G HAMILTON

Dec 23, 2024

DEVELOPED BY:

Mark Whitney

SLC ARTCC

01/05/2024

Developed By Signature:

Digitally signed by
ROBERT G HAMILTON

Dec 23, 2024

APPROVED BY:

BEV BORDY

AJV-A430

Approved By Signature:

Digitally signed by
ROBERT G HAMILTON

Dec 23, 2024

CHANGES:


REASONS:



FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STANDARD TERMINAL ARRIVAL (STAR)

Bearings, headings, courses, tracks and radials are magnetic. Elevations and altitudes are in feet, MSL. Altitudes are minimum altitudes unless otherwise indicated.
Ceilings are in feet above airport elevation. Distances are in nautical miles. Visibilities are in statute miles or feet RVR unless otherwise indicated.

Arrival Name	Number	STAR Computer Code	Superseded Number	Dated	Effective Date
JAZZZ (RNAV)	ONE	SPANE.JAZZZ1	NONE		
Graphic Depiction 1					

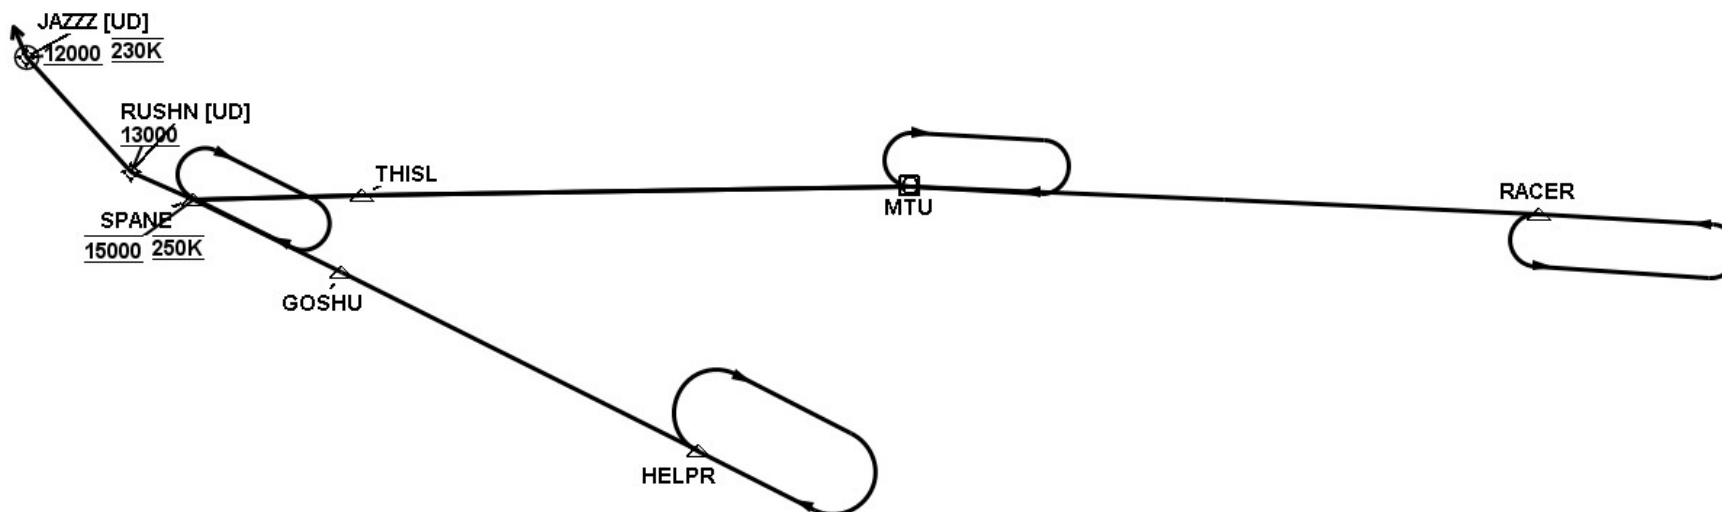

FEDERAL AVIATION ADMINISTRATION
FLIGHT STANDARDS SERVICE
STAR (DATA RECORD)

Arrival Name JAZZZ (RNAV)	Number ONE		STAR Computer Code SPANE.JAZZZ1		Superseded Number NONE		Dated	Effective Date	
<u>FIX/NAVAID</u>	<u>LAT/LONG</u>	<u>C</u>	<u>FO/FB</u>	<u>LEG TYPE</u>	<u>TC</u>	<u>DIST (NM)</u>	<u>ALTITUDE</u>	<u>SPEED</u>	<u>REMARKS</u>
En Route Transition									
HELPR	394511.31N / 1103253.24W	Y		IF					HELPR.JAZZZ1
GOSHU	400116.46N / 1111519.36W	Y	FB	TF	296.43	36.40			
SPANE	400749.62N / 1113254.19W	Y	FB	TF	295.98	15.00	AT 15000	AT 250K	
En Route Transition									
MTU VOR/DME	400856.74N / 1100737.30W	Y		IF					MTU.JAZZZ1
THISL	400811.12N / 1111251.06W	Y	FB	TF	269.48	50.03			
SPANE	400749.62N / 1113254.19W	Y	FB	TF	268.77	15.38	AT 15000	AT 250K	
En Route Transition									
RACER	400629.17N / 1085258.43W	Y		IF					RACER.JAZZZ1
MTU VOR/DME	400856.74N / 1100737.30W	Y	FB	TF	272.86	57.31			
THISL	400811.12N / 1111251.06W	Y	FB	TF	269.48	50.03			
SPANE	400749.62N / 1113254.19W	Y	FB	TF	268.77	15.38	AT 15000	AT 250K	
Common Route									
SPANE	400749.62N / 1113254.19W	Y		IF			AT 15000	AT 250K	SPANE.JAZZZ1
RUSHN	401021.30N / 1114025.17W	Y	FB	TF	293.71	06.29	AT/ABOVE 13000		
JAZZZ	402041.27N / 1115246.55W	Y	FO	TF	317.57	14.00	AT/ABOVE 12000	AT 230K	
KSLC				FM	335.62				