

HONOLULU, HAWAII

AL-754 (FAA)


FIG

APP CRS	Rwy Ldg	12245
079°	TDZE	14
	Apt Elev	14

RNAV (RNP) Z RWY 8L


DANIEL K INOUE INTL (HNL) (PHNL)

RNP AR APCH - GPS. Authorization required. From XUSLY or JIBNI: RF		MALSR	MISSED APPROACH: Climb to 420 then climbing right turn to 3000 direct ALANA and hold.
<p>▼ For uncompensated Baro-VNAV systems, procedure NA below 17°C or above 54°C. For inop ALS, increase RNP 0.15 DA all Cats visibility to 7/8 SM.</p>			
D-ATIS	HCF APPROACH	HONOLULU TOWER	GND CON
127.9 251.15	118.3 269.0	118.1 257.8 123.9 273.575 (8R/26L)	121.9 348.6

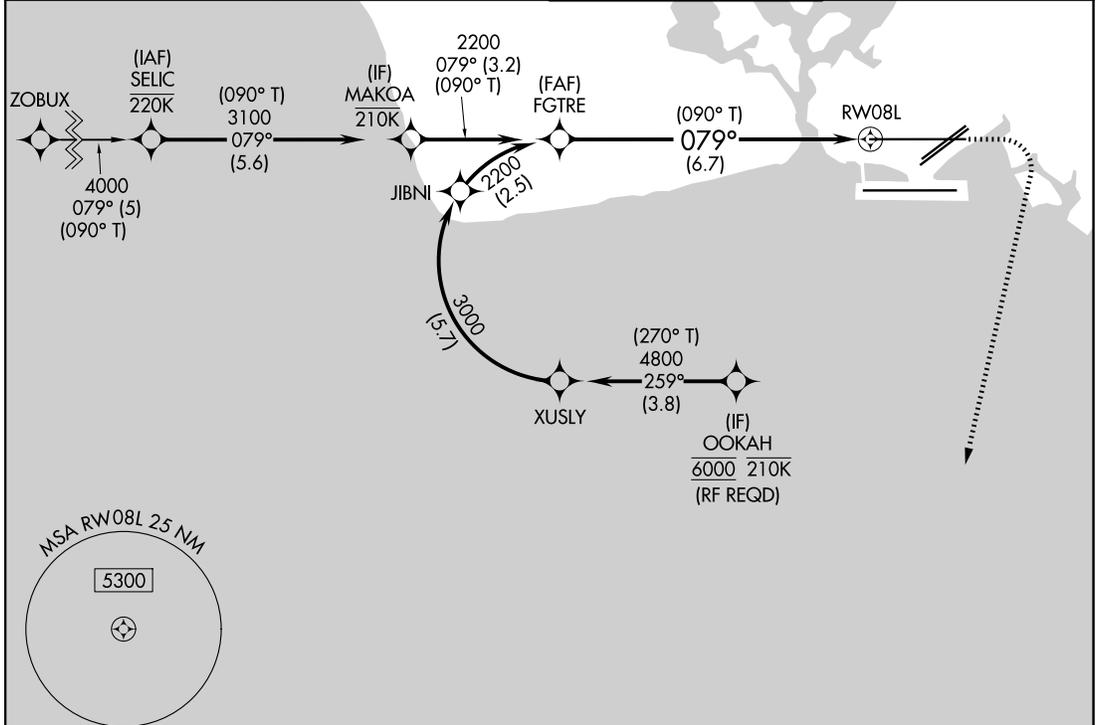

ELEV	14	D	TDZE	14
------	-----------	----------	------	-----------

PROTOTYPE: NOT FOR NAVIGATION

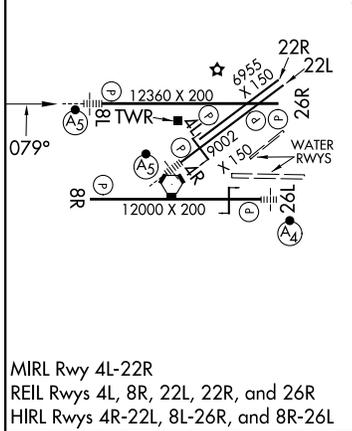

FGTR	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).	420	3000	ALANA
2200		↑	↷	△
See planview for multiple IF locations.				
GP 3.00°	6.7 NM			
TCH 56				
CATEGORY	A	B	C	D
RNP 0.15 DA		285-1/2	271 (300-1/2)	
RNP 0.30 DA		347-1/2	333 (400-1/2)	

AUTHORIZATION REQUIRED

HONOLULU, HAWAII
Amdt 4A FIG

21°19'N-157°55'W

DANIEL K INOUE INTL (HNL) (PHNL)
RNAV (RNP) Z RWY 8L

AUTOMATED AL-754 RNAV (RNP) Z RWY 8L

1:350000

PAC
24 NOV 2025
COMPILER: CG
REVIEWER:
DBL CHKR:
EFF: FIG