

Flight Procedures Cover Page	Task Action: FLIGHT CHECK	Task Type: IAP	Estimated Chart Date: 01/22/2026	APWS Task ID: 7A3CA4770123404B9E7CB08A66CF0375	APWS Project ID: 870CF5E913FB4DABAB306B368D8C8C1C
Procedure: ILS OR LOC RWY 22 AMDT 5		Enroute: NO	Specialist: Kunkler, Jamie		Agreement Number:
Airport ID: KMLU			Airport City: MONROE		State: LA
Facility ID: MZR	Facility Type: ILS	Flight Inspection Remark Type: New FC Slot			

Procedure Comments:
ACTIVE DATA USED FOR AIRPORT AND NAVAIDS.

CONTACT CASIMIR TABAKA 405.954.7931.

QUALITY
9
CHECKED
BEGUE

QUALITY
39
CHECKED




LOC I-MZR 109.5	APP CRS 222°	Rwy Ldg 7504 TDZE 78 Apt Elev 79
---------------------------	------------------------	---

ILS or LOC RWY 22

MONROE RGNL (MLU)

DME required. RADAR or DME required for procedure entry at BAIYU OM/MLU 5.1 DME.		MALS R ASR	MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.	
Circling Rwy 14 NA at night. DME from MLU VORTAC. DME use requires simultaneous reception of I-MZR and MLU DME. For inop ALS, increase S-LOC 22 Cat C/D visibility to 1 1/8 SM.				
ATIS 125.05	MONROE APP CON * 118.15 290.475	MONROE TOWER * 118.9 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95

PROTOTYPE-NOT FOR NAVIGATION

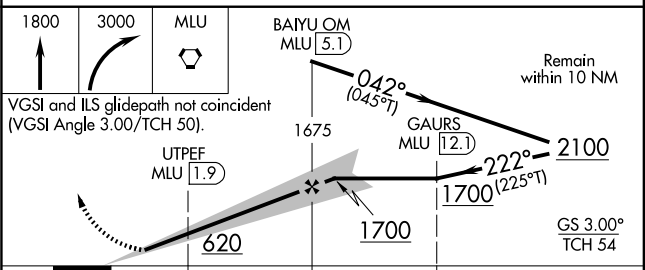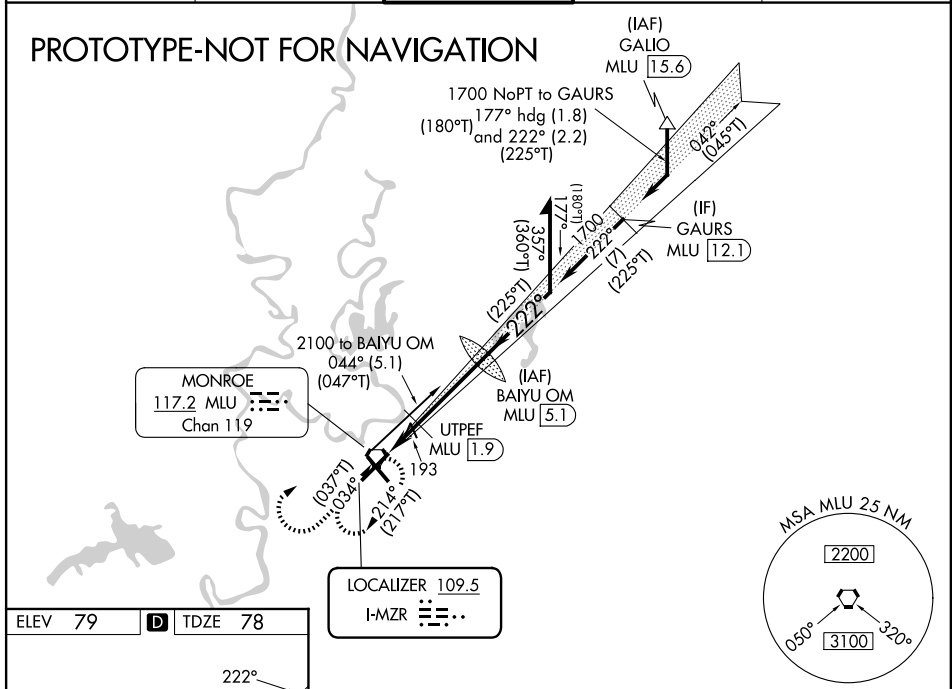

REIL Rws 14 and 32
MIRL Rwy 14-32
HIRL Rwy 4-22

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

CATEGORY	A	B	C	D
S-ILS 22	278-1/2 200 (200-1/2)			
S-LOC 22	500-1/2	422 (500-1/2)	500-3/4	422 (500-3/4)
CIRCLING	580-1	501 (600-1)	740-1 1/4 661 (700-1 1/4)	1160-3 1081 (1100-3)

OLD

ILS or LOC RWY 22
MONROE RGNL (MLU)


LOC I-MZR 109.5	APP CRS 222°	Rwy Idg TDZE Apt Elev	7504 78 79
---------------------------	------------------------	-----------------------------	---------------------------------------

DME or RADAR required for procedure entry.
 ⚠ Circling Rwy 14 NA at night. For inop ALS, increase S-LOC 22 Cat C/D visibility to 1½ SM.
 ⚠ # DME from MLU VORTAC.



MALSR


MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.

ATIS 125.05	MONROE APP CON * 118.15 290.475	MONROE TOWER * 118.9 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95
-----------------------	---	---	-------------------------	---------------------------	-------------------------

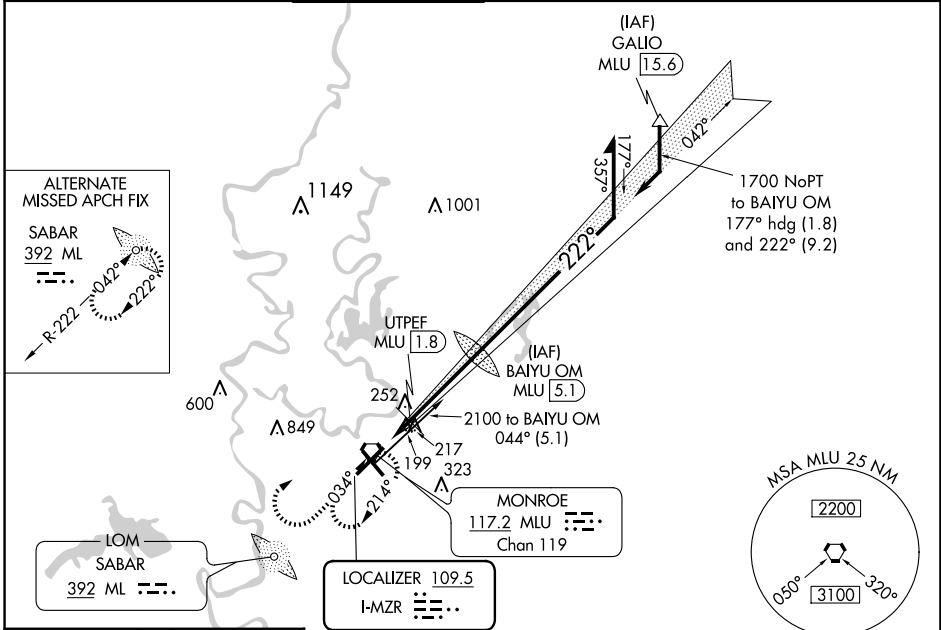

ELEV 79	D	TDZE 78
---------	----------	---------

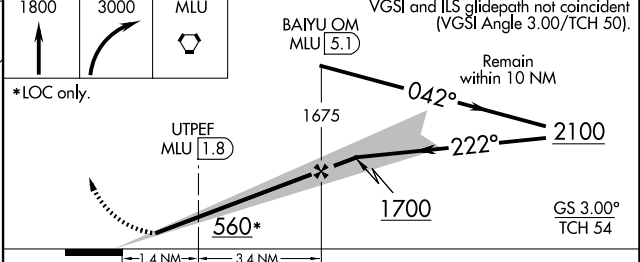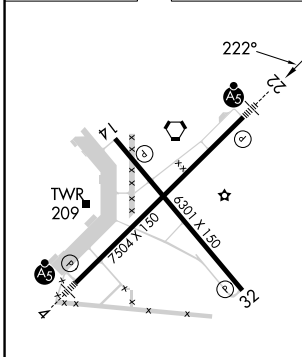


CATEGORY	A	B	C	D
S-ILS 22	278-½ 200 (200-½)			
S-LOC 22	560-½	482 (500-½)	560-1	482 (500-1)
C CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)
# UTPEF FIX MINIMUMS				
S-LOC 22	500-½	422 (500-½)	500-¾	422 (500-¾)
C CIRCLING	580-1	501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)


FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

SC-4, 17 APR 2025 to 15 MAY 2025

SC-4, 17 APR 2025 to 15 MAY 2025

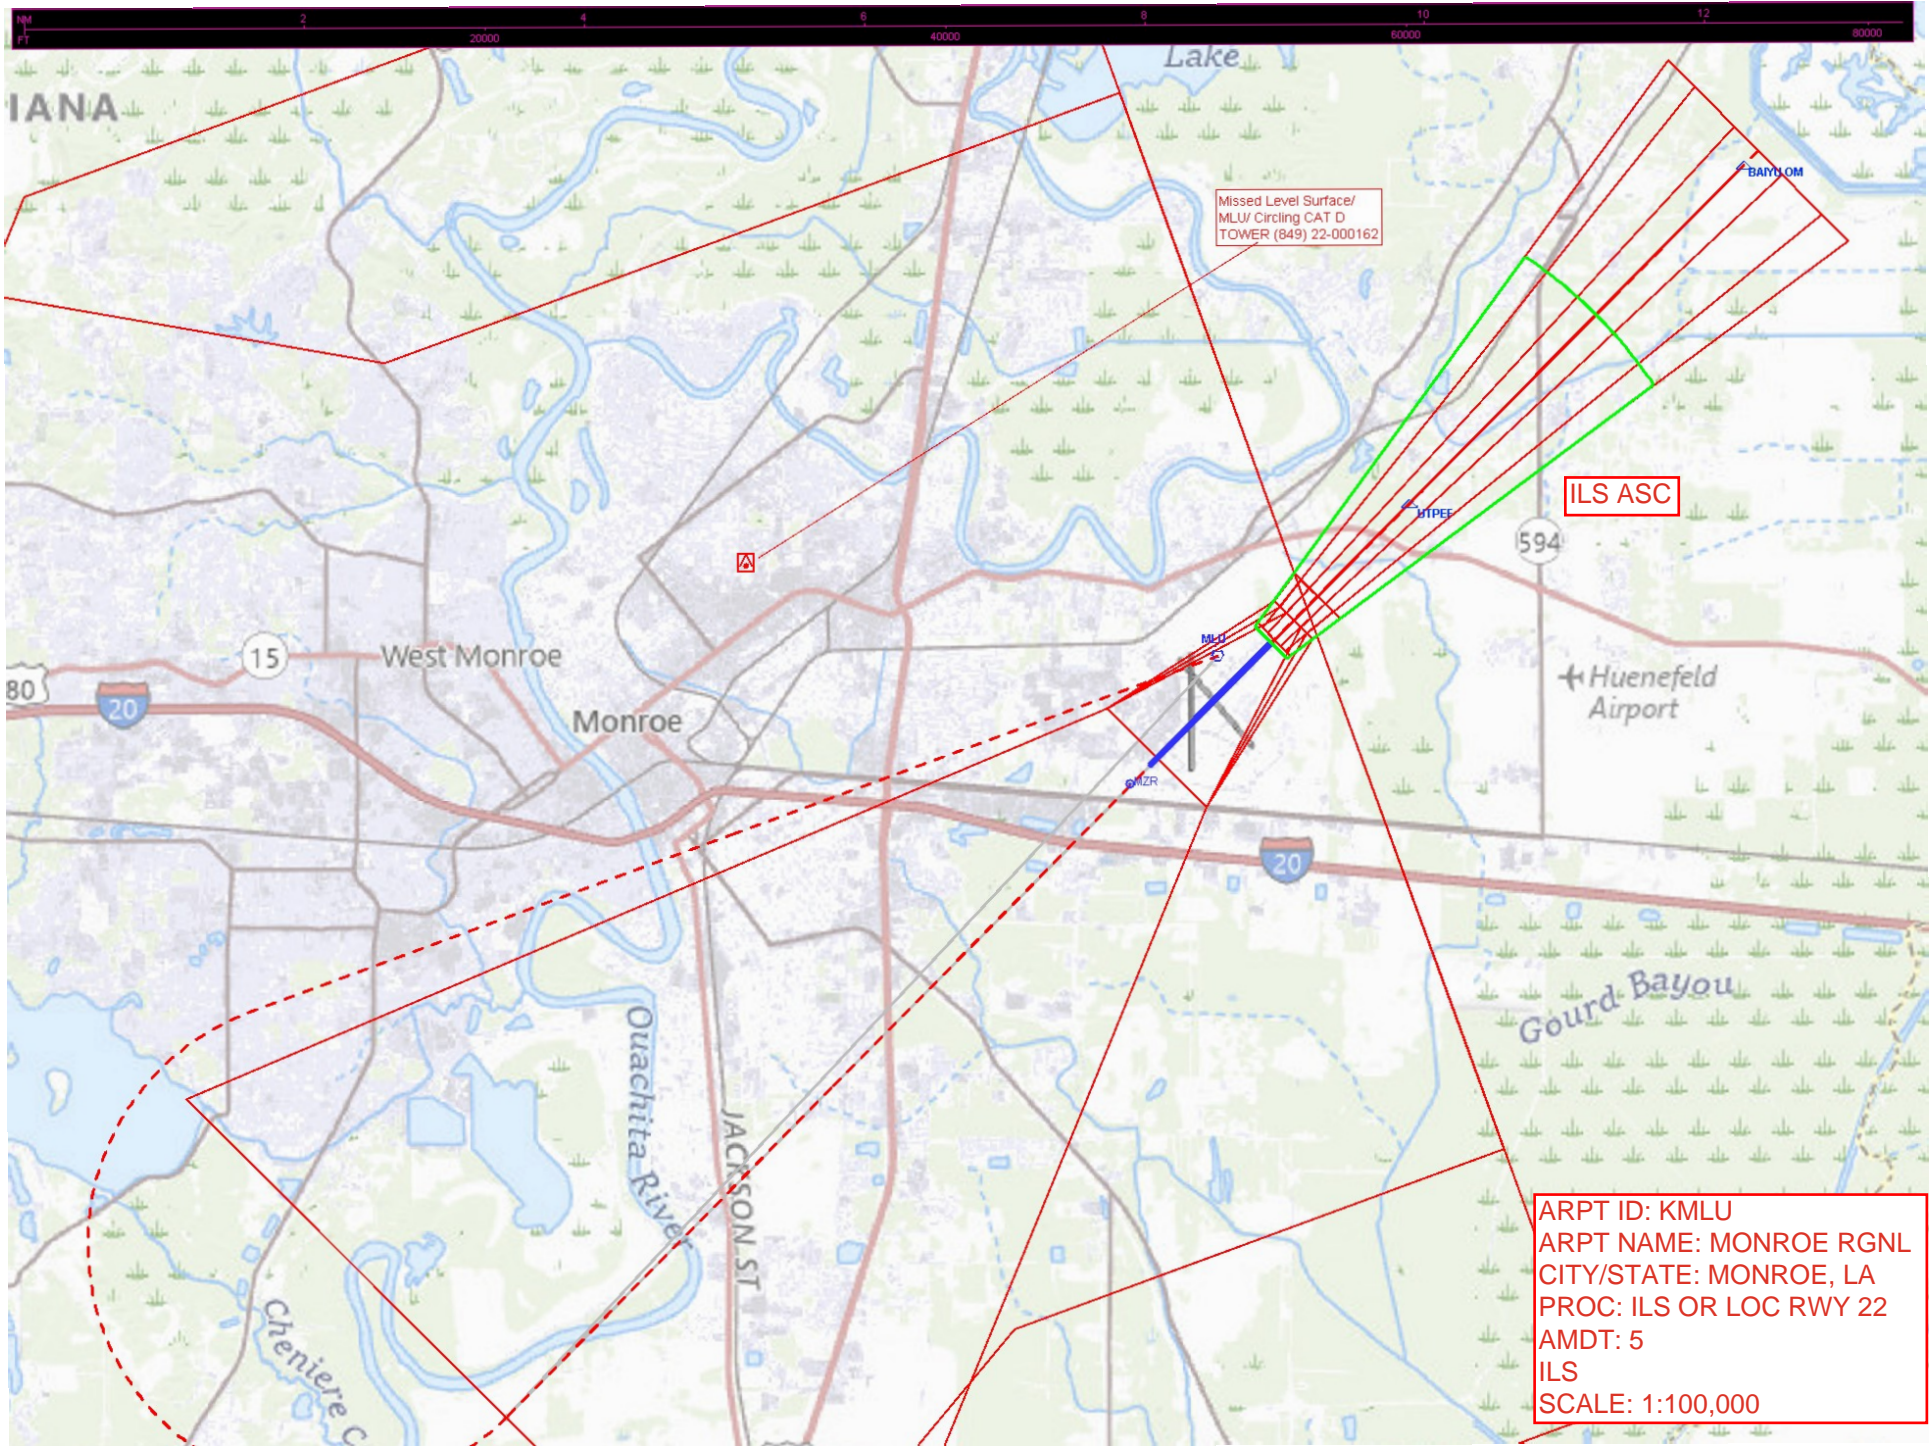

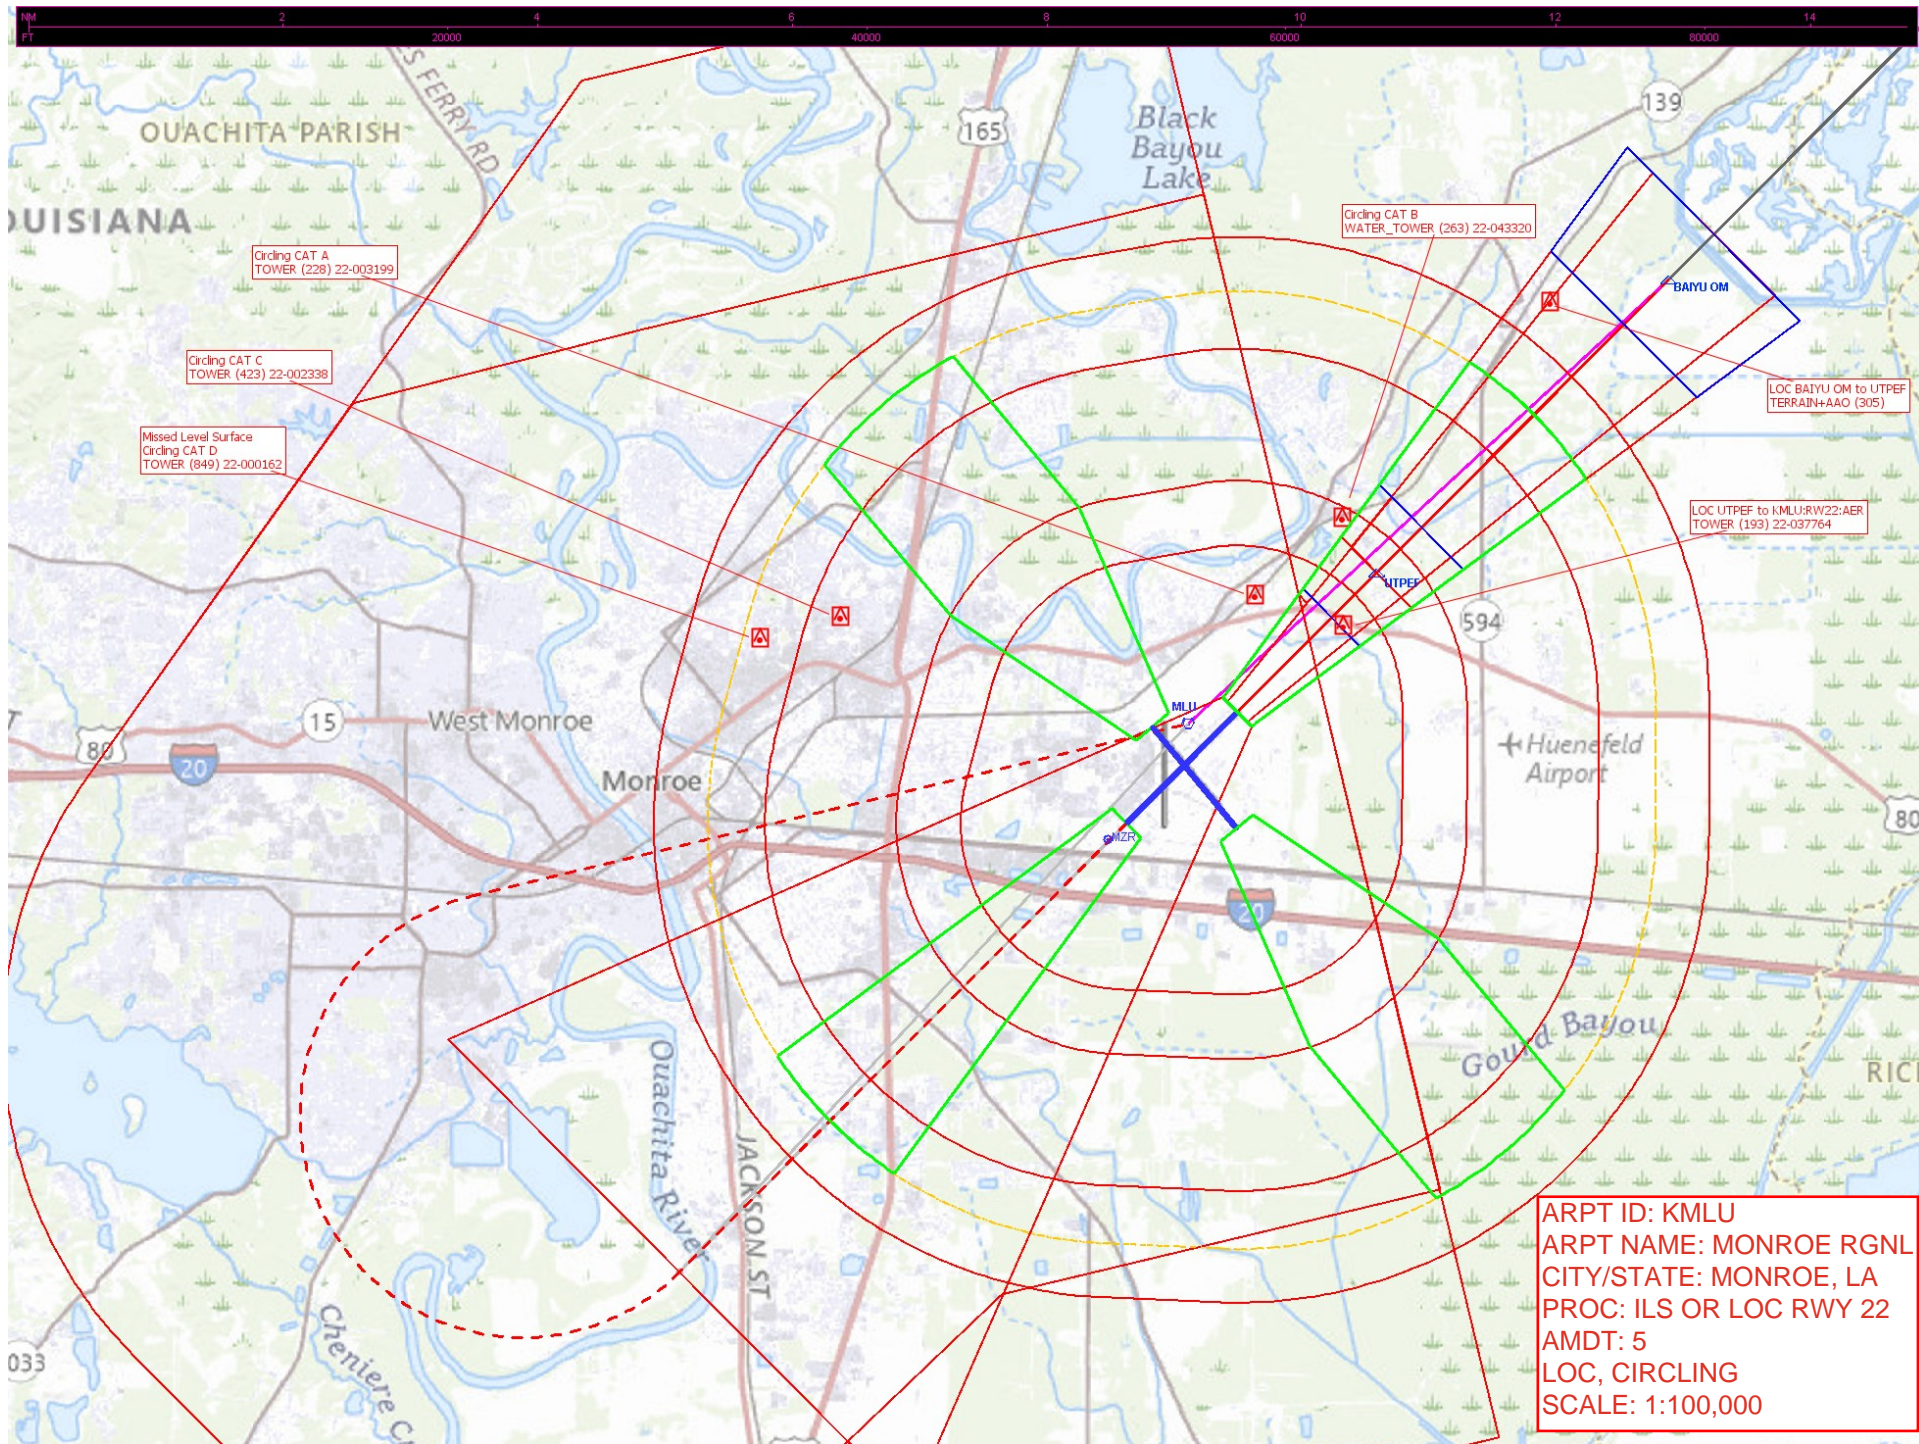

Circling CAT A
TOWER (228) 22-003199

Circling CAT C
TOWER (423) 22-002338

Missed Level Surface
Circling CAT D
TOWER (849) 22-000162

Circling CAT B
WATER_TOWER (263) 22-043320

LOC BAYU OM to UTPEF
TERRAIN+AAO (305)

LOC UTPEF to KMLU:RW22:AER
TOWER (193) 22-037764

ARPT ID: KMLU
 ARPT NAME: MONROE RGNL
 CITY/STATE: MONROE, LA
 PROC: ILS OR LOC RWY 22
 AMDT: 5
 LOC, CIRCLING
 SCALE: 1:100,000