

LOC I-GGG 109.5	APP CRS 131°	Rwy Ldg TDZE Apt Elev	9200 358 366
--------------------	-----------------	-----------------------------	--------------------

ILS or LOC RWY 13
EAST TEXAS RGNL (GGG)


DME required.

▼ VDP NA when using JXI altimeter setting. For inop ALS, increase S-ILS 13 Cat E visibility to RVR 4000, S- LOC 13 Cat C/D/E visibility to 1 3/8 SM. For inop ALS when using JXI altimeter setting increase S-ILS 13 Cat E visibility to RVR 4000, S-LOC 13 Cat C/D/E visibility to 1 3/8 SM. When local altimeter setting not received, use JXI altimeter setting and increase S-ILS 13 DA to 617 feet; increase all MDAs 60 feet, and S-LOC 13 visibility Cat C/D to RVR 6000 and Circling visibility Cat C/D/E 1/2 SM. *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using JXI altimeter setting).


MALSR

MISSED APPROACH: Climb to 3000 via GGG VORTAC R-126 to ARGENT INT/GGG 14 DME and hold, continue climb-in-hold to 3000.

ATIS 119.65	LONGVIEW APP CON* 124.675 257.975	EASTEX TOWER* 119.2 (CTAF) 0377.05	GND CON 121.6	UNICOM 122.95
----------------	--------------------------------------	---------------------------------------	------------------	------------------

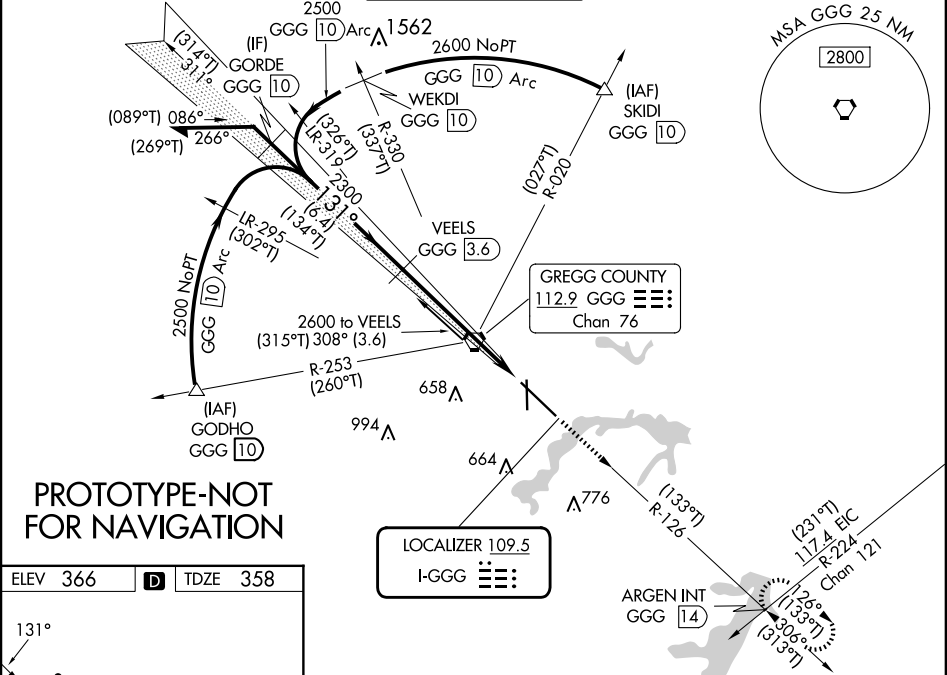

ELEV 366	D	TDZE 358
----------	---	----------

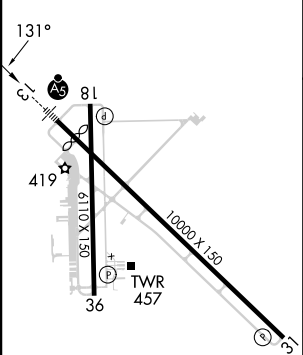

HIRL Rwy 13-31 ①						S-ILS 13*	558/24 200 (200-½)								
MIRL Rwy 18-36							S-LOC 13	860/24 502 (500-½)		860/55 502 (500-1)		860/60 502 (500-1¼)			
FAF to MAP 6 NM						CIRCLING		860-1 494 (500-1)		980-1¾ 614 (700-1¾)		1080-2¼ 714 (800-2¼)		1080-2½ 714 (800-2½)	
Knots	60	90	120	150	180										
Min:Sec	6:00	4:00	3:00	2:24	2:00										