


APP CRS	Rwy Ldg	2822
235°	TDZE	85
	Apt Elev	85

RNAV (GPS) RWY 24


SHANNON (EZF)

RNP APCH - GPS.	MISSED APPROACH: Climb to 2000 direct CAMIR and hold, continue to climb-in-hold to 2000.
▼ Rwy 24 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received use RMN altimeter setting and increase all MDAs 40 feet and LNAV visibility Cat C ¼ SM. Procedure NA at night. Circling NA to Rwy 15-33.	

AWOS-3 128.125	QUANTICO APP CON ★ 127.05 290.375	GCO 135.075	UNICOM 122.8 (CTAF) 0
-------------------	--------------------------------------	----------------	--------------------------

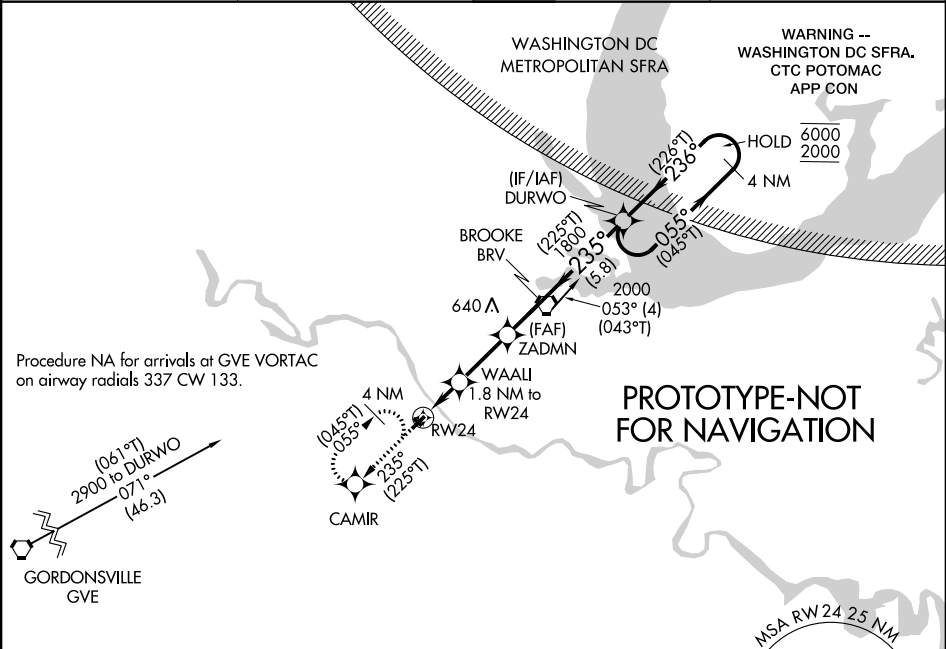

ELEV 85	TDZE 85
---------	---------

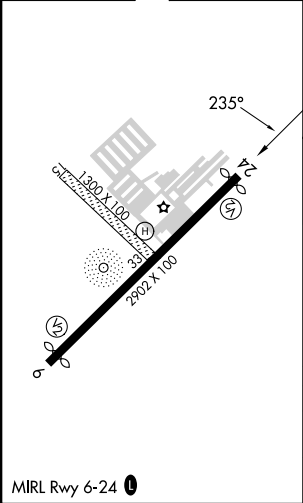

2000 ↑		CAMIR		DURWO 4 NM Holding Pattern		
		WAALI 1.8NM to RW24		ZADMN 3.77° TCH 40'		
840		1800		(46°T) 056° → 6000 ← 236° (226°T) 2000		
1.8 NM		2.4 NM		5.8 NM		
CATEGORY	A		B		C	D
LNAV MDA	600-1		515 (600-1)		600-1 ³ / ₈ 515 (600-1 ³ / ₈)	NA
CIRCLING	640-1 555 (600-1)		760-1 675 (700-1)		1060-3 975 (1000-3)	NA