

WAAS CH 50317 W17A	APP CRS 175°	Rwy Idg 7198 TDZE 1791 APT Elev 1791
--------------------------	------------------------	---


RNAV (GPS) RWY 17L

ABILENE RGNL (KABI)

RNP APCH - GPS.	MISSED APPROACH: CLIMB TO 4000 DIRECT IBRIF AND HOLD, CONTINUE CLIMB-IN-HOLD TO 4000.
FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -11°C OR ABOVE 54°C. BARO-VNAV AND VDP NA WHEN USING DYS ALTIMETER SETTING. WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE DYS ALTIMETER SETTING AND INCREASE LPV DA TO 2062 FEET AND ALL VISIBILITIES 1/8 SM; INCREASE LNAV/VNAV DA TO 2134 FEET; INCREASE ALL MDAS 40 FEET, AND CIRCLING VISIBILITY CAT D 1/4 SM.	

ATIS 118.25	ABILENE APP CON 125.0 338.3 (EAST) 127.2 282.3 (WEST)	ABILENE TOWER 120.1 257.8	GND CON 121.7 348.6
-----------------------	---	-------------------------------------	-------------------------------

PROTOTYPE-NOT
FOR NAVIGATION

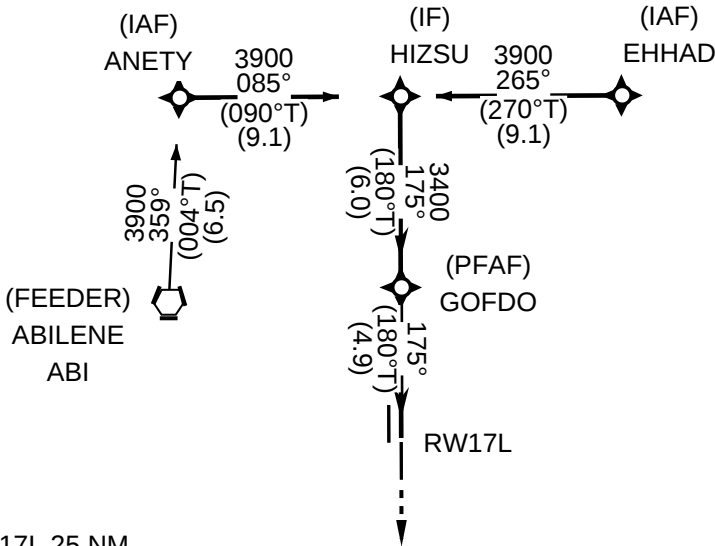

MSA RW17L 25 NM





CHART PLANVIEW NOTE: PROCEDURE NA FOR ARRIVAL ON ABI VORTAC AIRWAY RADIALS 037 CW 071.

HIZSU

175°
(180°T)

GS 3.00°
TCH 54

3400

GOFDO

1.2 NM to
RW17L

RW17L

4000

↑

IBRIF

◆

6.0 NM

3.6 NM

1.2 NM

CATEGORY	A					B	C	D	E
LPV	2041-3/4 250								
LNAV/VNAV	2113-1 322								
LNAV	2240-1 449					2240-1 3/8 449			
CIRCLING	2240-1 449		2320-1 529		2420-1 3/4 629		2460-2 669		2620-3 829