

WAAS CH 78417 W21A	APP CRS 218°	Rwy Ldg TDZE Apt Elev	4314 1449 1469
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21


DEVILS LAKE RGNL (DVL)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using 9D7 altimeter setting. Rwy 21 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use 9D7 altimeter setting and increase LPV DA to 1760 feet; increase LNAV/VNAV DA to 1901 feet and all visibilities 1/4 SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D 1/4 SM, and Circling visibility Cat C/D 1/4 SM.

MISSED APPROACH:
Climb to 3400 direct ZIKID and hold.

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

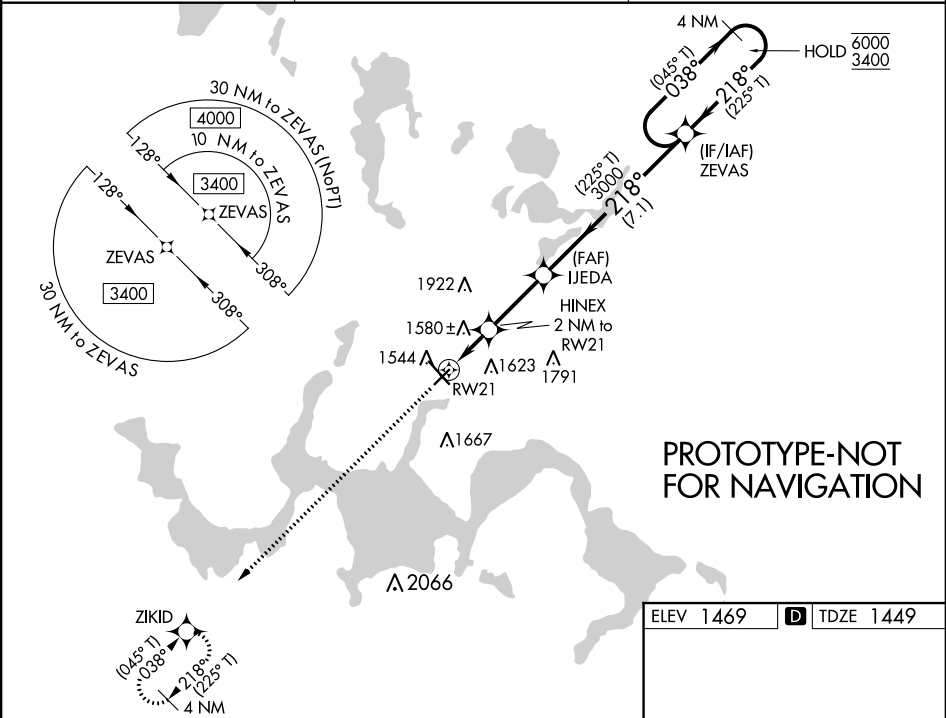

3400	ZIKID	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).			
HINEX 2 NM to RW21		IJEDA 3000		ZEVAS 4 NM Holding Pattern	
RW21 1.2 NM to RW21		2120		3000	
-1 2 -0.8		2.7 NM		7.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1699-1		250 (300-1)		
LNAV/VNAV DA	1840-1 1/8		391 (400-1 1/8)		
LNAV MDA	1840-1		391 (400-1)		
CIRCLING	2000-1		531 (600-1)		
			2240-2 1/4		
			771 (800-2 1/4)		
			2240-2 1/2		
			771 (800-2 1/2)		

