




WAAS CH XXXX XXX	APP CRS 015°	Rwy Idg 5900 TDZE 978 APT Elev 984
------------------------	------------------------	---

RNAV (GPS) RWY 2

FAYETTEVILLE MUNI (KFYM)

RNP APCH - GPS	MISSED APPROACH: CLIMB TO 3000 DIRECT NIVLE AND HOLD.
BARO-VNAV AND VDP NA WHEN USING MDQ ALTIMETER SETTING. RWY 2 HELICOPTER VISIBILITY REDUCTION BELOW 3/4 SM NOT AUTHORIZED. FOR UNCOMPENSATED BARO-VNAV SYSTEMS, LNAV/VNAV NA BELOW -16°C OR ABOVE 54°C. WHEN LOCAL ALTIMETER SETTING NOT RECEIVED, USE MDQ ALTIMETER SETTING AND INCREASE LPV DA TO 1287 FEET AND ALL VISIBILITIES 1/8 SM; INCREASE LNAV/VNAV DA TO 1439 FEET AND ALL VISIBILITIES 1/4 SM; INCREASE ALL MDAS 60 FEET AND LNAV VISIBILITY CATS C AND D 1/4 SM, AND CIRCLING VISIBILITY CAT C 1/4 SM.	

AWOS-3 135.275	HUNTSVILLE APP CON ★ 125.6 354.1	CLNC DEL (GCO) 121.725	UNICOM 122.8 (CTAF) 0
--------------------------	--	----------------------------------	---------------------------------

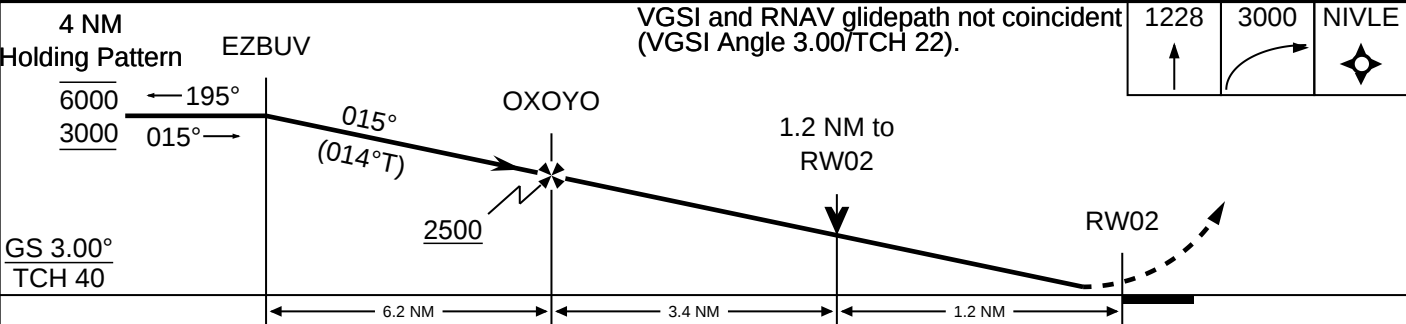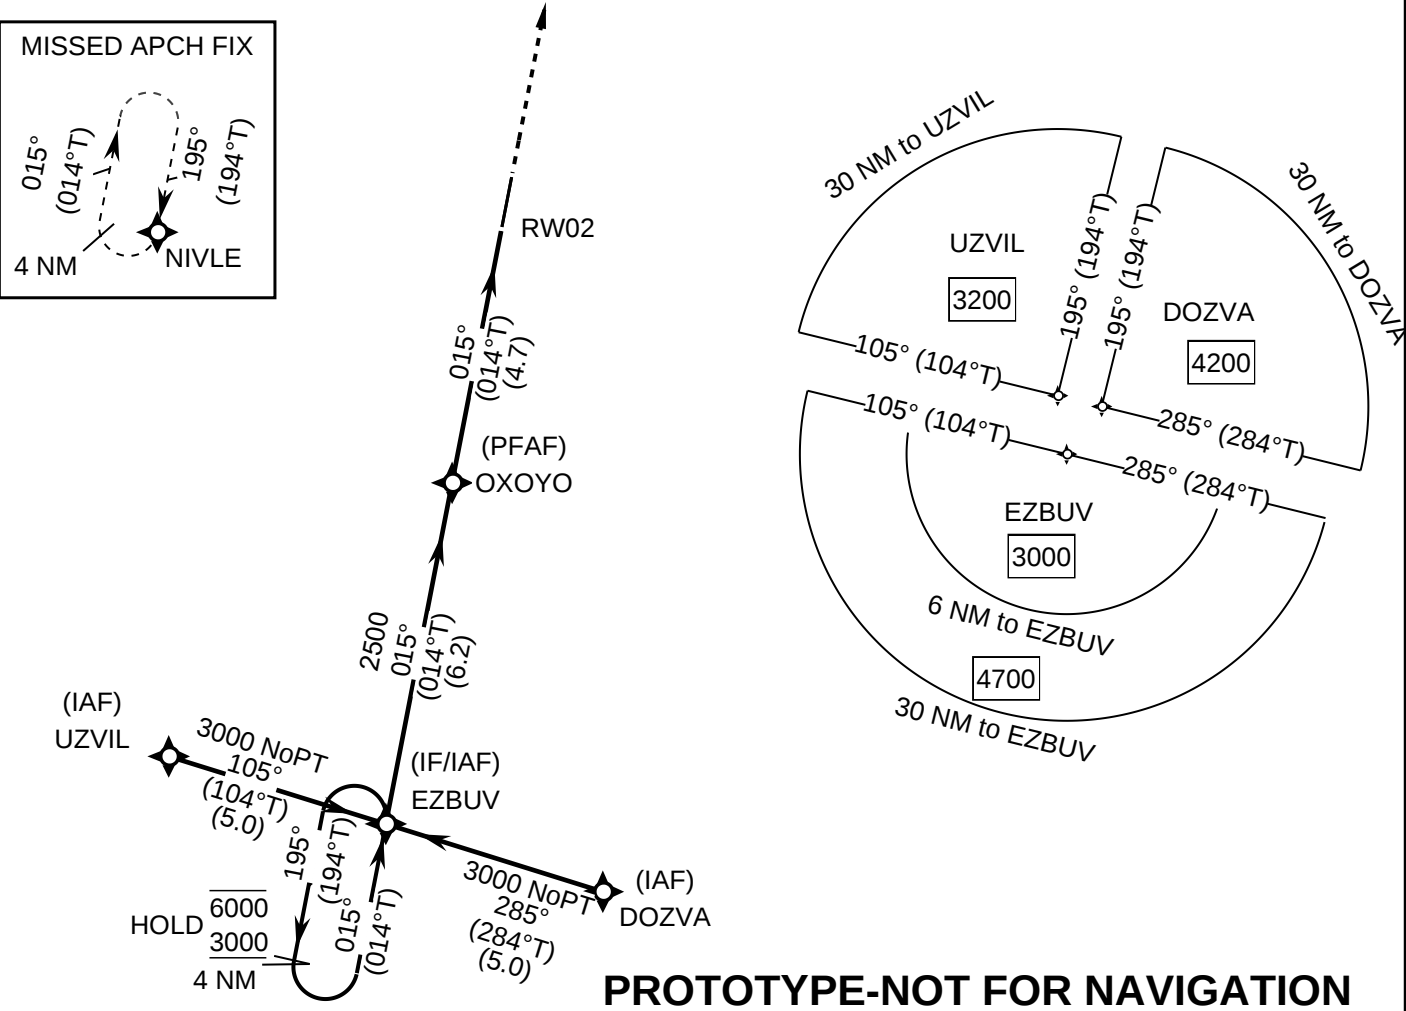

CATEGORY	A	B	C	D
LPV	1228-3/4 250			
LNAV/VNAV	1380-1 1/8 402			
LNAV	1380-1 402		1380-1 1/8 402	
CIRCLING	1420-1 436	1560-1 576	1580-1 1/2 596	1580-2 596